

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
2 December 2010 (02.12.2010)

(10) International Publication Number  
**WO 2010/138195 A1**

- (51) **International Patent Classification:**  
*E02B 1/00* (2006.01)
- (21) **International Application Number:**  
PCT/US2010/001562
- (22) **International Filing Date:**  
26 May 2010 (26.05.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
12/455,311 29 May 2009 (29.05.2009) US
- (71) **Applicant (for all designated States except US):**  
**SEARETE LLC** [US/US]; 11235 SE 6th Street, Suite 200, Bellevue, Washington 98004 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **BOWERS, Jeffrey A.** [US/US]; 631 Market St., Unit 104, Kirkland, Washington 98033 (US). **CALDEIRA, Kenneth G.** [US/US]; 3 Ventana Court, Redwood City, California 94062 (US). **CHAN, Alistair K.** [US/US]; 9769 NE Murden Cove Dr., Bainbridge Island, Washington 98110 (US). **GATES, William** [US/US]; One Microsoft Way, Redmond, Washington 98052-6399 (US). **HYDE, Roderick A.** [US/US]; 9915 - 161st Avenue N.E., Redmond, Washington 98052 (US). **ISHIKAWA, Muriel Y.** [US/US]; 1185 Hillcrest Avenue, Livermore, California 94550-4921 (US). **KARE, Jordin T.** [US/US]; 908 15th Ave. East, Seattle, Washington 98112 (US). **LATHAM, John** [GB/US]; 601 East Street, Boulder, Colorado 80302-9771 (US). **MYHRVOLD, Nathan P.** [US/US]; C/O Searete LLC, 11235 SE 6th Street, Suite 200, Belle-

vue, Washington 98004 (US). **SALTER, Stephen H.** [GB/GB]; 27 Blackford Road, Edinburgh EH9 2DT (GB). **TEGREENE, Clarence T.** [US/US]; 10629 NE 17th Street, Bellevue, Washington 98004-2834 (US). **WATTENBURG, Willard H.** [US/US]; 2335 Rubicon Court, Walnut Creek, California 94598 (US). **WOOD, JR., Lowell L.** [US/US]; 989 112th Avenue NE #2310, Bellevue, Washington 98004 (US). **WOOD, Victoria Y.H.** [US/US]; 1185 Hillcrest Avenue, Livermore, California 94550-4921 (US).

- (74) **Agents:** **TEGREENE, Clarence T.** et al.; 11235 SE 6th Street, Suite 200, Bellevue, Washington 98004 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** WATER ALTERATION STRUCTURE AND SYSTEM HAVING HEAT TRANSFER CONDUIT

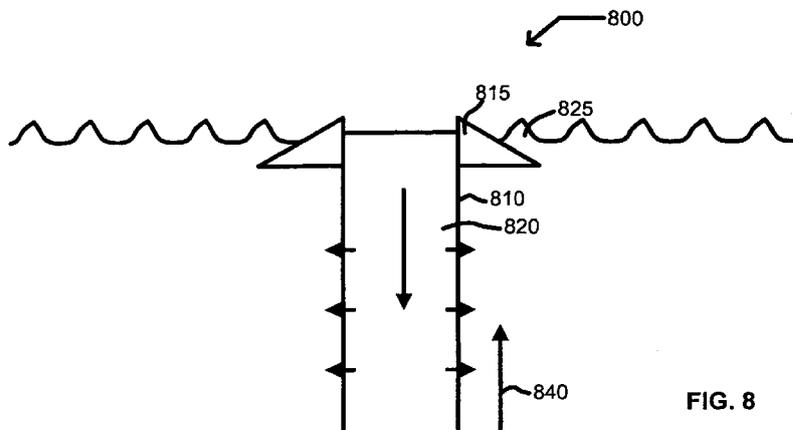


FIG. 8

(57) **Abstract:** A system is described generally for a water capture structure that is configured to capture wave water lapping over at least one wall of the water capture structure. The at least one wall extends at least above a nominal surface water level and at least one conduit extends downward from the water capture structure. The at least one conduit has a length extending to a depth at which at least one property of water at the depth differs substantially from that of water at the surface. The at least one conduit is configured to provide thermal energy to water outside of the at least one conduit. The at least one conduit has at least one conduit wall.

WO 2010/138195 A1

**Published:**

— with international search report (Art. 21(3))

## **Water Alteration Structure and System Having Heat Transfer Conduit**

### **CROSS-REFERENCE TO RELATED APPLICATIONS**

**[0001]** The present application is related to and claims the benefit of the earliest available effective filing date(s) from the following listed application(s) (the “Related Applications”) (e.g., claims earliest available priority dates for other than provisional patent applications or claims benefits under 35 USC § 119(e) for provisional patent applications, for any and all parent, grandparent, great-grandparent, etc. applications of the Related Application(s)).

#### **Related Applications:**

**[0002]** For purposes of the USPTO extra-statutory requirements, the present application constitutes a continuation-in-part of United States Patent Application No. **12/006,823**, entitled **WATER ALTERATION STRUCTURE AND SYSTEM**, naming **Jeffrey A. Bowers, Kenneth G. Caldeira, Alistair K. Chan, William H. Gates, III, Roderick A. Hyde, Muriel Y. Ishikawa, Jordin T. Kare, John Latham, Nathan P. Myhrvold, Stephen H. Salter, Clarence T. Tegreene, Willard H. Wattenburg, Lowell L. Wood, Jr. and Victoria Y.H. Wood** as inventors, filed **03 January 2008**, which is currently co-pending, or is an application of which a currently co-

pending application is entitled to the benefit of the filing date.

**[0003]** For purposes of the USPTO extra-statutory requirements, the present application constitutes a continuation-in-part of United States Patent Application No. 12/006,815, entitled **WATER ALTERATION STRUCTURE MOVEMENT METHOD AND SYSTEM**, naming **Jeffrey A. Bowers, Kenneth G. Caldeira, Alistair K. Chan, William H. Gates, III, Roderick A. Hyde, Muriel Y. Ishikawa, Jordin T. Kare, John Latham, Nathan P. Myhrvold, Stephen H. Salter, Clarence T. Tegreene, and Lowell L. Wood, Jr.** as inventors, filed **03 January 2008**, which is currently co-pending, or is an application of which a currently co-pending application is entitled to the benefit of the filing date.

**[0004]** For purposes of the USPTO extra-statutory requirements, the present application constitutes a continuation-in-part of United States Patent Application No. 12/006,805, entitled **WATER ALTERATION STRUCTURE APPLICATIONS AND METHODS**, naming **Jeffrey A. Bowers, Kenneth G. Caldeira, Alistair K. Chan, William H. Gates, III, Roderick A. Hyde, Muriel Y. Ishikawa, Jordin T. Kare, John Latham, Nathan P. Myhrvold, Stephen H. Salter, Clarence T. Tegreene, Willard H. Wattenburg, and Lowell L. Wood, Jr.** as inventors, filed **03 January 2008**, which is currently co-pending, or is an application of which a currently co-pending application is entitled to the benefit of the filing date.

**[0005]** For purposes of the USPTO extra-statutory requirements, the present application constitutes a continuation-in-part of United States Patent Application No. 12/006,804, entitled **ECOLOGICAL ALTERATION MANAGEMENT OR WATER ALTERATION MANAGEMENT SYSTEMS AND METHODS**, naming **Jeffrey A. Bowers, Kenneth G. Caldeira, Alistair K. Chan, William H. Gates, III, Roderick A. Hyde, Muriel Y. Ishikawa, Jordin T. Kare, John Latham, Nathan P. Myhrvold, Stephen H. Salter, Clarence T. Tegreene, and Lowell L. Wood, Jr.** as inventors, filed **03 January 2008**, which is currently co-pending, or is an application of which a currently co-pending application is entitled to the

benefit of the filing date.

**[0006]** For purposes of the USPTO extra-statutory requirements, the present application constitutes a continuation-in-part of United States Patent Application No. **12/012,225**, entitled **WATER ALTERATION STRUCTURE AND SYSTEM HAVING BELOW SURFACE VALVES OR WAVE REFLECTORS**, naming **Jeffrey A. Bowers, Kenneth G. Caldeira, Alistair K. Chan, William Gates, Roderick A. Hyde, Muriel Y. Ishikawa, Jordin T. Kare, John Latham, Nathan P. Myhrvold, Stephen H. Salter, Clarence T. Tegreene, and Lowell L. Wood, Jr.** as inventors, filed **30 January 2008**, which is currently co-pending, or is an application of which a currently co-pending application is entitled to the benefit of the filing date.

**[0007]** The United States Patent Office (USPTO) has published a notice to the effect that the USPTO's computer programs require that patent applicants reference both a serial number and indicate whether an application is a continuation or continuation-in-part. Stephen G. Kunin, *Benefit of Prior-Filed Application*, USPTO Official Gazette March 18, 2003, available at <http://www.uspto.gov/web/offices/com/sol/og/2003/week11/patbene.htm>. The present Applicant Entity (hereinafter "Applicant") has provided above a specific reference to the application(s) *from which priority is being claimed* as recited by statute. Applicant understands that the statute is unambiguous in its specific reference language and does not require either a serial number or any characterization, such as "continuation" or "continuation-in-part," for claiming priority to U.S. patent applications. Notwithstanding the foregoing, Applicant understands that the USPTO's computer programs have certain data entry requirements, and hence Applicant is designating the present application as a continuation-in-part of its parent applications as set forth above, but expressly points out that such designations are not to be construed in any way as any type of commentary and/or admission as to whether or not the present application contains any new matter in addition to the matter of its parent application(s).

**[0008]** All subject matter of the Related Applications and of any and all parent,

grandparent, great-grandparent, etc. applications of the Related Applications is incorporated herein by reference to the extent such subject matter is not inconsistent herewith.

## **BACKGROUND**

**[0009]**The description herein generally relates to the field of alteration of water temperatures and dissolved and particulate matter in bodies of water such as oceans, lakes, rivers, structures capable aiding in the alteration and control of such surface and subsurface water temperatures and compositions as well as of many applications and methods of making and using the same. The description also generally relates to the field of structures for altering the weather conditions for the genesis of and/or the maintenance of a hurricane and/or near-hurricane type weather.

**[0010]**The description further relates to enhancing properties of such systems by designing heat transfer characteristics to aid in transferring heat from down flowing water to upflowing or surrounding water.

**[0011]**Conventionally, there is a need for structures for applications related to altering water properties such that there is a diminished contrast between near surface waters and waters found at greater depth, such as but not limited to atmospheric management, weather management, hurricane suppression, hurricane prevention, hurricane intensity modulation, hurricane deflection, biological augmentation, biological remediation, etc.

## **SUMMARY**

**[0012]**In one or more various aspects, related systems include but are not limited to circuitry and/or programming for effecting the herein-referenced method aspects; the circuitry and/or programming can be virtually any combination of hardware, software, and/or firmware configured to effect the herein-referenced method aspects depending upon the design choices of the system designer. Also various structural elements may be employed depending on design choices of the system designer.

**[0013]**In one aspect, a water capture structure is configured to capture wave water lapping over at least one wall of the water capture structure, the at least one wall extending at least above a nominal surface water level. The captured wave water

provides a pressure head to force the water downward. The system also includes at least one conduit extending downward from the water capture structure, the at least one conduit has a length extending to a depth at which at least one property of water at the depth differs substantially from that of water at the surface. The at least one conduit is configured to provide thermal energy to water outside of the at least one conduit, the at least one conduit having at least one conduit wall.

**[0014]**In another aspect, a water capture structure is configured to capture water. The water capture structure is formed as a container having at least one wall extending at least above a nominal surface water level and the water capture structure is at least partially submerged. The system also includes at least one conduit extending downward from the water capture structure. The at least one conduit has a length. The at least one conduit is configured to provide thermal energy to water outside of the at least one conduit. The at least one conduit has at least one conduit wall. The at least one aperture is formed in at least one of the water capture structure or the at least one conduit and located at a distance below the nominal surface water level. The at least one one-way valve is coupled to the at least one aperture and allows flow of water in only one direction.

**[0015]**In yet another aspect, a wave water capture structure is configured to hold water and to produce a pressure head from the captured wave water. The wave water capture structure has at least one wall, the at least one wall extends at least above a nominal local surface water level. The system also includes at least one conduit extending downward from the water capture structure. The at least one conduit has a length extending to a depth below the local water surface. The at least one conduit is configured to provide thermal energy to water outside of the at least one conduit. The at least one conduit has at least one conduit wall. A mechanically actuated control system is configured to vary the rate of thermal energy transfer to water outside of the at least one conduit as a way to effect the rate of flow of water through the at least one conduit.

**[0016]** In addition to the foregoing, other system aspects are described in the claims, drawings, and text forming a part of the present disclosure.

**[0017]**In addition to the foregoing, various other method and/or system and/or

program product aspects are set forth and described in the teachings such as text (e.g., claims and/or detailed description) and/or drawings of the present disclosure.

**[0018]** The foregoing is a summary and thus contains, by necessity, simplifications, generalizations and omissions of detail; consequently, those skilled in the art will appreciate that the summary is illustrative only and is NOT intended to be in any way limiting. Other aspects, features, and advantages of the devices and/or processes and/or other subject matter described herein will become apparent in the teachings set forth herein.

### **BRIEF DESCRIPTION OF THE FIGURES**

**[0019]** The foregoing summary is illustrative only and is not intended to be in any way limiting. In addition to the illustrative aspects, embodiments, and features described above, further aspects, embodiments, and features will become apparent by reference to the drawings and the following detailed description, of which:

**[0020]** **FIG. 1** is an exemplary diagram of a generalized vessel for holding and moving water.

**[0021]** **FIG. 2** is an exemplary diagram of a pattern of deployment of a plurality of vessels similar to that of **FIG. 1**.

**[0022]** **FIG. 3** is another exemplary diagram of a pattern of deployment of a plurality of vessels similar to that of **FIG. 1**.

**[0023]** **FIG. 4** is an exemplary diagram of a generalized vessel for holding and moving water and depicting on-board propulsive devices.

**[0024]** **FIG. 5** is a simplified depiction of a deployment of a plurality of vessels such as those depicted in **FIG. 1** in a geographic region, the simplified depiction not intended to imply any specific scale and the depiction of the vessels and watercraft not drawn to scale.

**[0025]** **FIG. 6** is an exemplary block diagram of a generalized vessel for holding and moving water having an auxiliary conduit.

**[0026]** **FIG. 7** is an alternative exemplary diagram of a generalized vessel for holding and moving water.

**[0027]** **FIG. 8** is an alternative exemplary diagram of a generalized water property alteration system depicting heat transfer between flows.

**[0028]FIG. 9** is an alternative exemplary diagram of a generalized water property alteration system depicting heat transfer between flows.

**[0029]FIG. 10** is an alternative exemplary diagram of a generalized water property alteration system depicting heat transfer between flows.

**[0030]FIG. 11** is an alternative exemplary diagram of a cross section of a generalized water property alteration system depicting heat transfer structures providing heat transfer between flows.

**[0031]FIG. 12** is an alternative exemplary diagram of a cross section of a generalized water property alteration system depicting heat transfer structures providing heat transfer between flows.

**[0032]FIG. 13** is an alternative exemplary diagram of a cross section of a generalized water property alteration system depicting heat transfer structures providing heat transfer between flows.

**[0033]FIG. 14** is an alternative exemplary diagram of a cross section of a generalized water property alteration system depicting heat transfer structures providing heat transfer between flows.

## **DETAILED DESCRIPTION**

**[0034]**In the following detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description, drawings, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented here. Those having skill in the art will recognize that the state of the art has progressed to the point where there is little distinction left between hardware and software implementations of aspects of systems; the use of hardware or software is generally (but not always, in that in certain contexts the choice between hardware and software can become significant) a design choice representing cost vs. efficiency tradeoffs. Those having skill in the art will appreciate that there are various vehicles by which processes and/or systems and/or other technologies described herein can be effected (e.g., hardware, software, and/or firmware), and that the preferred vehicle will vary with the context in

which the processes and/or systems and/or other technologies are deployed. For example, if an implementer determines that speed and accuracy are paramount, the implementer may opt for a mainly hardware and/or firmware vehicle; alternatively, if flexibility is paramount, the implementer may opt for a mainly software implementation; or, yet again alternatively, the implementer may opt for some combination of hardware, software, and/or firmware. Hence, there are several possible vehicles by which the processes and/or devices and/or other technologies described herein may be effected, none of which is inherently superior to the other in that any vehicle to be utilized is a choice dependent upon the context in which the vehicle will be deployed and the specific concerns (e.g., speed, flexibility, or predictability) of the implementer, any of which may vary. Those skilled in the art will recognize that optical aspects of implementations will typically employ optically-oriented hardware, software, and or firmware.

**[0035]** The foregoing detailed description has set forth various embodiments of the devices and/or processes via the use of block diagrams, flowcharts, and/or examples. Insofar as such block diagrams, flowcharts, and/or examples contain one or more functions and/or operations, it will be understood by those within the art that each function and/or operation within such block diagrams, flowcharts, or examples can be implemented, individually and/or collectively, by a wide range of hardware, software, firmware, or virtually any combination thereof. In one embodiment, several portions of the subject matter described herein may be implemented via Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs), digital signal processors (DSPs), or other integrated formats. However, those skilled in the art will recognize that some aspects of the embodiments disclosed herein, in whole or in part, can be equivalently implemented in integrated circuits, as one or more computer programs running on one or more computers (e.g., as one or more programs running on one or more computer systems), as one or more programs running on one or more processors (e.g., as one or more programs running on one or more microprocessors), as firmware, or as virtually any combination thereof, and that designing the circuitry and/or writing the code for the software and or firmware would be well within the skill of one of skill in the art in light of this disclosure. In addition, those skilled in the art

will appreciate that the mechanisms of the subject matter described herein are capable of being distributed as a program product in a variety of forms, and that an illustrative embodiment of the subject matter described herein applies regardless of the particular type of signal bearing medium used to actually carry out the distribution. Examples of a signal bearing medium include, but are not limited to, the following: a recordable type medium such as a floppy disk, a hard disk drive, a Compact Disc (CD), a Digital Video Disk (DVD), a digital tape, a computer memory, etc.; and a transmission type medium such as a digital and/or an analog communication medium (e.g., a fiber optic cable, a waveguide, a wired communications link, a wireless communication link, etc.). Further, those skilled in the art will recognize that the mechanical structures disclosed are exemplary structures and many other forms and materials may be employed in constructing such structures.

**[0036]** The need for mechanisms, devices, methods, systems, and structures which may be used to alter hurricanes either in their strength, their origin, or their direction of travel has been realized. Billions of dollars of destruction and damage is regularly attributable to hurricanes and hurricane-like tropical storms. Thus, great interest has arisen in controlling these powerful storms. Conventionally, it has been proposed to deploy barges equipped with upward-pointing jet engines into the paths of hurricanes. The jet engines would theoretically be configured to create mini-cyclones which would consume oceanic energy and thus prevent or suppress such high powered weather systems.

**[0037]** Another potential solution involves the use of Dyn-O-Gel, a polymer that may absorb as much as 1,500 times its own weight in water to deprive a hurricane of atmospheric moisture. The concept involves the use of airplanes to drop Dyno-O-Gel into hurricanes to deprive them of moisture and thus of latent heat. The powder is suggested to convert into a gel when the atmospheric moisture is captured and would then reliquify when it encounters higher-osmolality ocean water.

**[0038]** The jet engine solution has been met with great skepticism and the cost and feasibility are very uncertain. The use of a moisture absorbing gel requires the deployment of a huge volume of the absorbing gel material. Also, the use of a moisture absorbing material is still in the testing phase. The gel material after

absorbing moisture falls to the ocean and may dissolve. Depending on the chemical composition of the gel, the gel be regarded as a pollutant. These various shortcomings considered, it may be desirable to provide a different approach for altering hurricane and/or tropical storm activity by providing a structure and method that solves at least one or more deficiencies of other systems known in the art. Because hurricanes and other tropical storms derive their energy from warm ocean water, it is logical to harness the great energies of the Earth's fluid envelopes to suppress or alter hurricanes or other tropical storms, and/or to employ the powers of motion within these envelopes over long time-intervals to modulate at least one property of an envelope that is exploited over much shorter time-scales and/or much more limited spatial scales for energizing a hurricane.

**[0039]** A potential solution for cooling warm surface water has been explored by researchers with Atmocean, Inc. of Santa Fe, NM. In the Atmocean approach, an elongated tube with a buoy is used to create an upwelling effect. The upwelling effect drives cold water from a depth to the surface.

**[0040]** It is well known that a hurricane's primary energy source is the release of the heat of condensation of water vapor condensing at high altitudes, with solar-derived heat being the initial source for evaporation. Therefore, a hurricane may be seen as a giant vertical heat engine, albeit one dependent upon mass supplied by largely horizontal flows. Water condensation leads to higher wind speeds, as a fraction of the released energy is converted immediately into thermal energy and thence into mechanical energy, the faster winds and lower pressures associated with them in turn cause increased surface evaporation and thus even more subsequent condensation. Much of the released energy drives updrafts that increase the height of speeding up condensation. This gives rise to factors that provide the system with enough energy to be self-sustaining, and result in a positive feedback loop that continues as long as the tropical cyclone can draw energy from a thermal reservoir and isn't excessively sheared along its vertical extent. In this case, the heat source is the warm water at the surface of the ocean. Without this thermal reservoir to support it a hurricane or other similar storm will not commence, will be weaker, or will die out as the positive feedback loop diminishes to sub-threshold levels or never gets above them.

**[0041]** Referring now to FIG. 1, a cross-section of a water-borne structure or vessel 100 is depicted. Vessel 100 is a tub-like structure having one or more walls 110 and a bottom 115. Vessel 100 may be held buoyant in the water by one or more buoyancy tanks 120 which may be used to maintain the buoyancy of vessel 100 and further may be used to control the height of walls 110 above the water level. Vessel 100 also includes a conduit 125 whose horizontal cross section is substantially smaller than the horizontal cross section of the tub portion 130 of the vessel defined by walls 110. In an exemplary embodiment, conduit 125 extends well below the ocean surface including depths below the ocean's thermocline.

**[0042]** In most circumstances, most of the sunlight impinging on the ocean surface is absorbed in the surface layer. The surface layer therefore heats up. Wind and waves move water in this surface layer which distributes heat within it. The temperature may therefore be reasonably uniform to depths extending a few hundred feet down from the ocean surface. Below this mixed layer, however, the temperature decreases rapidly with depth, for example, as much as 20 degrees Celsius with an additional 150 m (500 ft) of depth. This area of rapid transition is called the thermocline. Below it, the temperature continues to decrease with depth, but far more gradually. In the Earth's oceans, approximately 90% of the mass of water is below the thermocline. This deep ocean consists of layers of substantially equal density, being poorly mixed, and may be as cold as -2 to -3°C.

**[0043]** Therefore, the lower depths of the ocean may be used as a huge heat/energy sink which may be exploited by vessel 100. When vessel 100 is deployed at sea, waves 135 may lap over the top of walls 110 to input warm (relative to deeper waters) surface ocean water into tub 130. Tub 130 will fill to a level 140 which is above the average ocean level depicted as level 145. Because of the difference between levels 140 and 145, a pressure head is created thereby pushing warm surface ocean water in a downward direction 150 down through conduit 125 to exit into the cold ocean depths (relative to near surface waters) through one or more openings 155. In an exemplary embodiment, the depth of opening 155 may be located below the ocean's thermocline, the approximate bottom of which is depicted as line 160. This cycle will be continuous in bringing warm surface ocean water to great depth as ocean waves

continue to input water into tub 130.

**[0044]** If many of vessels 100 are distributed throughout a region of water, the temperature of the surface of the water may be altered. Referring to FIG. 2, an array 200 of vessels 100 is depicted. Such vessels may be arranged in a plurality of ways, including but not limited to positioning them in a water region in an array, such as array 200, in a random placement 300, as depicted in FIG. 3, within a region, and/or in any other arrangement. It may be desirable to determine the most suitable and/or optimal arrangements through computer modeling or other techniques. Referring now to FIG. 5, it may be seen that many vessels 100 may be dispersed throughout hurricane prone regions such as but not limited to the Gulf of Mexico 500 or the Caribbean Sea. Alternatively, it may be desirable to affect the water surface temperature at locations in which it is known to give rise to hurricane producing conditions much prior to a hurricane ever being produced. For example, it has been observed that some hurricanes of the Caribbean may be tracked back towards Africa in the Atlantic Ocean. It may therefore be desirable to deploy vessels 100 in such areas. Vessels 100, depicted for illustrative purposes only and not to scale are shown being dispersed in a relatively random pattern. Boats 510 may be used to tow vessels to desired locations. Also, other means such as self propulsion, airlifting, towing, or other methods to move vessels may also be used. In another embodiment, vessels 100 may be anchored in a variety of ways, including but not limited to anchored to the bottom, anchored using subsurface weights, anchored using sea anchors, or anchored to each other.

**[0045]** Referring again to FIG. 1 vessel 100 may be one vessel in a system for altering water surface temperature. As such the tub 130 is one type of a holding vessel configured to hold water. Tub 130 includes at least one wall 110 (but may include multiple walls) which are coupled to a bottom portion 115. The at least one wall 110 extends above the water level and the bottom portion 115 is configured to be submerged. At least one conduit 125 extends from the bottom of the tub 130. In some, but not necessarily all, applications, it may be desirable for conduit 125 to have a length that extends to a depth at which the temperature of water at the depth (e.g., below line 160) is substantially less than water at the surface

**[0046]** Vessel 100 may be held buoyant by both the materials used to construct vessel 100 as well as at least one ballast tank 120. Tanks 120 may be coupled to at least one pump 170 and at least one valve 180. In accordance with an exemplary embodiment, the height of wall 110 above the average water surface level may be varied and controlled depending on the time-varying height of the local waves and depending on the desired flow rate through conduit 125. One way in which to vary the height of wall 110 above the average water level 145 is to pump atmospheric air into tank 120 or out of tank 120. In conjunction with pump 170, valve 180 may be used to draw water into or out of tanks 120. In accordance with another exemplary embodiment, it may be desirable to have the ability to mechanically raise or lower at least a portion of wall 110 relative to the rest of the structure. It may also be desirable to control the raising and lowering of all or part of wall 110 in response to conditions adjacent to vessel 100 (e.g., water temperature, wave height).

**[0047]** In another embodiment, water flow into vessel 100 may be via openings 175 in wall 110, rather than over the top of wall 110. Such openings may be configured to preferentially allow flow into vessel 100, instead of out of the vessel. In some embodiments, openings 175 are passive, using flaps, checkvalves, rotating drums, or similar mechanisms to support unidirectional flow. In other embodiments, openings 175 are actively controlled, utilizing motorized or variable setpoint flow control devices such as valves, flaps, rotating drums, or similar mechanisms.

**[0048]** Walls 110 and bottom portion 115 as well as other parts of vessel 100 may be constructed of any of a variety of materials and preferably of a material substantially resistant to degradation in water. For example, vessel 110 may be substantially constructed from concrete, polymers, at least one of metals or metal alloys, fabrics, reinforced fabrics, and/or composite materials. In some applications, it may be advantageous for the construction materials to resist degradation only for a limited period of time, as degradation of the structure may diminish or eliminate expenditures associated with post-application retrieval of the structure. Furthermore, it may be advantageous to allow the structure to sink below the water surface or to the water bottom after application, where degradation may be preferred to occur. In an exemplary embodiment, conduit 125 may be formed of any of a variety of materials

including both rigid materials and flexible materials. It may also be desirable to use stiffening structures in the conduit depending on the type of materials used. Such stiffening structures aid in maintaining the shape of conduit 125 under pressure and under stress. The stiffening structures may be placed at one or more locations along the length of the conduit. Further, such stiffening structures may be deployable and may aid in deployment along with a conduit which may also be deployable from tub 130. In yet another exemplary embodiment, it may be desirable to form vessel 100 from a material which would be known to degrade over time. This may be useful if it is known that a vessel has a desired lifespan or term of usefulness. Once the vessel's use is done, the vessel could sink or be sunk where it could subsequently degrade at a subsurface location.

**[0049]**In an exemplary embodiment the holding vessel or tub 110 has a horizontal cross sectional dimension that is substantially greater than a horizontal cross sectional dimension of the conduit 125. In another exemplary embodiment holding vessel or tub 100 has a horizontal cross sectional dimension and/or shape that is substantially the same as the cross sectional dimension and/or shape as conduit 125. The pressure head created by the weight of the column of water above the conduit which is above the line 145 is used to pressurize the descending water in conduit 125. In an exemplary embodiment it may be convenient to have a power source 190 on board vessel 100. Power source 190 may be any of a variety of power sources, including but not limited to a solar cell, a wind generator, a wave power generator, a turbine turned by water descending in the conduit, a battery power source, a fuel powered power source, a thermoelectric power source, etc.

**[0050]**In accordance with an exemplary embodiment, it may be desirable to provide a taper to at least a portion of conduit 125. Such a tapered structure may provide increased exit velocities of the water flow and could aid in providing increased directional thrust should the outlets be oriented in directions other than downwards. A tapered conduit may also allow easier lifting of the bottom portions of the conduit to facilitate different water levels, different desired conduit lengths, and simplifying transport of the vessel. With a tapered structure the conduit may be configured to easily fold up or roll up into itself in a relatively concentric manner. In one exemplary

embodiment, tubes or pockets may be formed along the length or at various locations along the conduit such that air or other fluids pumped into or out of the tubes or pockets will affect the buoyancy of the conduit portions and therefore raise or lower the conduit

**[0051]**In accordance with an embodiment a vessel 600 is depicted in FIG. 6 having a conduit 625. Disposed within conduit 625 is a turbine 630. Turbine 630 may be driven by the flow of water through conduit 625. Turbine 630 may be utilized for a variety of purposes including but not limited to generating power for a variety of purposes, maintaining buoyancy, controlling buoyancy, driving other turbines, increasing the water flow through conduit 625, etc.

**[0052]**In accordance with other exemplary embodiments it may be desirable to equip vessel 100 with one or more propulsion systems. Referring now to FIG. 4, a propulsion system may be in the form of a sail or a propeller 450 or other motorized propulsion producing device. Such a propulsive device may be powered by power source 460 or any other source of power. The propulsion system may be used to control the positioning of vessel 100 such that it remains at a specific area, moves in a specific pattern, and/or moves to a completely new location. A rudder 470, fin, sail, or other steering device may be coupled to vessel 100 to help guide vessel 100.

Alternatively, a sail or a propeller 450 may be configured to change orientation to provide steering for vessel 100. Because different depths in bodies of water often have currents flowing in different directions or with different speeds, a propulsion system may involve the use of one or more sea anchors with mechanisms and control systems to effect proper placement of the sea anchors. In one exemplary embodiment, it may be desirable to construct vessel 100 with a shape such that its coefficient of drag is less in one direction than another. This may be accomplished by making the dimensions of vessel 100 longer in one direction than another, for example. Other methods and shapes may also be used to produce such an effect.

**[0053]**In accordance with another exemplary embodiment, vessel 100 may include a movable conduit in which at least a portion 480 of conduit 425 may be movable in various directions in order to provide a propulsive force in a desired direction. In another exemplary embodiment, the movable portion may be one or more openings

455 which may be controlled, along the length of conduit 425. The propulsive force generated by water flow through conduit 425 may also be varied by opening and closing opening 485 using a controlled access device such as door 490 (or other aperture control devices such as but not limited to valves, etc.) that may control the flow rate through conduit 425.

**[0054]**In an exemplary embodiment walls 410 of vessel 100 may be formed of multiple wall segments or multiple wall portions. The multiple wall segments of walls 410 form a closed shape to contain water within vessel 100. The wall segments may be curved or straight, may be movable in such a way as to help let in water or alternatively to release water. In one exemplary embodiment, vessel 100 may be permanently anchored to the water floor, temporarily anchored to the water floor, tied to a subsurface weight, tied to one or more sea-anchors, or may be freely movable. In one exemplary embodiment, vessel 100 is movable by coupling the vessel to a propulsive vessel, such as a tugboat or the like. In another exemplary embodiment, vessel 100 may include a wind capture structure, such as a sail 495 that may be used to harness wind power for moving the holding vessel. The wind capture structure may be used for controlling the amount that the at least one wall of the holding vessel extends above the water, that is it may also be used to provide lift to the holding vessel 100 structure, to help control how far above the water level that walls 410 extend. Sea anchors are functionally similar to sails, except instead of extending up into the atmosphere they are deployed into the water. Thus, sea anchors or current capture structures may be used for similar purposes as sails and wind capture structures. These include moving or holding the vehicle, generating power, providing lift, etc. Also in an exemplary embodiment, vessel 100 may have a ramp area 475 or other wave altering area that helps to control how the waves move water over the sides of vessel 100. This wave-altering structure may be a static or passive structure, or it may be an active device or structure having one or more components that are actuated or powered in order to have a time-dependent character or activity; the power for such purposes may be derived from any of the power-providing means discussed above, or may be derived from the wave-action itself. Further, in an exemplary embodiment, vessel 100 may have any of a variety of shapes including but not limited to circular,

elongated, non-circular, shaped in a manner which aids in passively controlling orientation relative to wave motion, etc.

**[0055]** Referring now to FIG. 6, a vessel 600 is depicted. Vessel 600 includes a conduit 625 in which a turbine 630 is driven by the downward flow of water through conduit 625. In an exemplary embodiment, the turning turbine may be used for a variety of purposes including providing electric or mechanical power, providing control, providing propulsive power, etc. In one exemplary embodiment a secondary conduit 640 (which represents one or more conduits) may be used to bring cold water (such as below an ocean thermocline 650) to upper areas of warmer surface water to aid in cooling the warm surface water regions, enhance mixing of subsurface water with surface water, enhance mixing of surface water with subsurface water, raising subsurface nutrients to the surface, bringing surface nutrients to subsurface regions, etc. In one exemplary embodiment, turbine 630 may be used to drive a second turbine 635 in conduit 640 that pumps water up through conduit 640. Further, other mechanisms may be used to bring subsurface water upwards. In most places, deeper waters contain a greater concentration of nutrients than surface water, so conduit 640 may also be used to transport dissolved nutrients from deeper waters to waters near the surface of the body of water.

**[0056]** It may be desirable to construct a vessel such as vessel 100 of FIG. 1, in a variety of shapes and configurations depending on the use and on the desired performance characteristics. Referring to FIG. 7, an alternative exemplary embodiment of a vessel 700 is depicted in the form of an elongate tube that is designed to capture water at its top 710 and thereby develop a pressure head (as described earlier) to push surface water to subsurface levels. Walls 720 may form the structure without a bottom portion or a tub portion as shown in other exemplary embodiments. Walls 720 may be formed of any of a variety of materials as also described earlier. Water may be carried to any of a variety of subsurface levels depending on the design and desired performance, including but not limited to below thermocline 730.

**[0057]** The capability of the systems and methods described to enhance mixing between surface and subsurface water can be useful for other applications in addition

to thermally based weather modification. One such application is to aid in ocean uptake of atmospheric CO<sub>2</sub>. Oceans are natural CO<sub>2</sub> sinks, and represent the largest active carbon sink on Earth. This role as a sink for CO<sub>2</sub> is driven by two processes, the solubility pump and the biological pump. The former is primarily a function of differential CO<sub>2</sub> solubility in seawater and the thermohaline circulation, while the latter is the sum of a series of biological processes that transport carbon (in organic and inorganic forms) from the near-surface euphotic zone to the ocean's interior.

**[0058]** The solubility pump is a nonbiological effect wherein CO<sub>2</sub> first dissolves in the surface layer of the ocean. This surface layer can become saturated and its ability to absorb more carbon dioxide declines. Use of this system to promote mixing between surface and subsurface water enhances the efficacy of the solubility pump in at least two manners; by net transport of CO<sub>2</sub>-enriched water downwards, as well as by reducing the temperature of the surface water, thereby increasing its ability to dissolve CO<sub>2</sub>. The solubility pump enhancement induced by this system can also be useful for increasing ocean uptake of other atmospheric gases, such as methane, nitrogen oxides, sulfur dioxide, etc.

**[0059]** While the biological pump currently has a limited effect on uptake of CO<sub>2</sub> introduced into the atmosphere by human activities, there have been suggestions to increase the carbon sequestration efficiency of the oceans by increasing the surface-layer phytoplankton concentration, which is in many instances limited by insufficient surface-layer nutrients. Nitrates, silicates, and phosphates are, for instance, largely absent from surface waters, yet are considerably more abundant in subsurface oceans. These exemplary systems and methods can be used to mix surface and subsurface waters, thereby transporting nutrients towards the surface. This increase in surface nutrients can be useful in increasing the CO<sub>2</sub> biological pump by increasing surface-layer phytoplankton concentrations. Increases in surface-layer nutrients can also be useful for increasing populations of water-based fauna or flora, both in oceans and in other water bodies, such as lakes, reservoirs, rivers, etc.

**[0060]** The benefits of these systems and methods in increasing mixing between surface and subsurface water is not restricted to use in oceans, but can also be beneficial in other bodies of water, such as lakes, reservoirs, rivers, etc.

**[0061]**In an exemplary embodiment, it may be beneficial to provide radial heat transfer from the warm water flowing downwards within the water alteration system, to the surrounding colder water. This heat transfer action may reduce the buoyant force acting to retard flow of the downward moving fluid, thereby enhancing the mass flow which can be sunk by the water alteration system. By heating the surrounding water, buoyant forces on it are enhanced, thereby promoting an upward flow. In accordance with one exemplary embodiment, the surrounding water can be enclosed within the water alteration system (i.e., the system has at least two interior conduits, including at least one for downward flow and at least one for upward flow, with heat transfer between them. In exemplary embodiments up flowing conduits may or may not surround the down flowing conduits. The surrounding water receiving heat from the down flowing water can be outside the water alteration system and may or may not rise alongside it. In one exemplary embodiment, the approach can be used to improve performance of sinks that are used to transport carbon dioxide (CO<sub>2</sub>), captured from the atmosphere, downward or to transfer nutrients upwards from lower depths in the water.

**[0062]**Referring now to FIG. 8, an exemplary embodiment of a water alteration system 800 is depicted. System 800 includes a conduit wall 810 forming a conduit 820 directing flow downward. A set of ramps 815 are depicted for guiding overtopping waves 920 to lap over the side of wall 810, to create the pressure head. Wall 810 is formed of a heat conductive material such that heat from the warmer down flowing water is conducted in a direction 830 to cause heating of surrounding water. Such heating may influence water rising in an upward direction 840.

**[0063]**Referring now to FIG. 9, an exemplary embodiment of a water alteration system 900 is depicted. System 900 includes a conduit wall 910 forming a conduit 920 directing flow downward. A set of ramps 915 are depicted for guiding overtopping waves 925 to lap over the side of wall 910, to create the pressure head. Wall 910 is formed of a heat conductive material such that heat from the warmer down flowing water is conducted in a direction 930 to cause heating of water flowing in an upward direction through one or more conduits 940. Such heating may influence water rising in an upward direction and out through openings 945. In other exemplary

embodiments openings 945 may be in any of a variety of locations including at various locations below the nominal water surface.

**[0064]** Referring now to FIG. 10, an exemplary embodiment of a water alteration system 1000 is depicted. System 1000 includes a conduit wall 1010 forming a conduit 1020 directing flow downward. A set of ramps 1015 are depicted for guiding overtopping waves 1025 to lap over the side of wall 1010, to create the pressure head. Wall 1010 is formed of a heat conductive material such that heat from the warmer down flowing water is conducted in a direction 1030 to cause heating of water flowing in an upward direction through one or more conduits 1040. Such heating may influence water rising in an upward direction and out through openings 1045. In other exemplary embodiments openings 1045 may be in any of a variety of locations including at various locations below the nominal water surface.

**[0065]** Referring now to FIG. 11, a cross section 1100 of the conduits of FIG. 9, is depicted. Section 1100 includes conduit wall 1110 forming conduit 1115. In one exemplary embodiment, conduit 1115 may be the up flowing conduit as depicted in Fig. 9. Alternatively, in another exemplary embodiment, conduit 1115 may be the down flowing conduit. Within conduit 1115 is a second conduit wall 1120 forming a conduit 1125. As depicted in FIG. 9, conduit 1125 forms a down flowing conduit, however as described above, other exemplary embodiments may dictate that conduit 1125 is an up flowing conduit. In the configuration of FIG. 9, water flowing through conduit 1125 transfers heat across the heat conductive material of wall 1120 and provides such heat to up flowing water in conduit 1115.

**[0066]** Referring now to FIG. 12, a cross section 1200 of the an exemplary embodiment of conduits, is depicted. Section 1200 includes conduit wall 1210 forming conduit 1215. In one exemplary embodiment, conduit 1215 may be an up flowing conduit. Alternatively, in another exemplary embodiment, conduit 1215 may be a down flowing conduit. Within conduit 1215 are more than one second conduits 1220. Conduits 1220 may be up flowing conduits, however as described above, other exemplary embodiments may dictate that conduit 1220 be up flowing conduits. Water flowing through conduits 1220 may transfer heat across the heat conductive material of the walls forming conduits 1220 and provides such heat to up flowing water in

conduit 1215.

**[0067]** Referring now to FIG. 13, a cross section 1300 similar to the conduits of FIG. 11, is depicted. Section 1300 includes conduit wall 1310 forming conduit 1315. In one exemplary embodiment, conduit 1315 may be the up flowing conduit as depicted in Fig. 9. Alternatively, in another exemplary embodiment, conduit 1315 may be the down flowing conduit. Within conduit 1315 is a second conduit wall 1320 forming a conduit 1325. Conduit 1325 may form a down flowing conduit, however as described above, other exemplary embodiments may dictate that conduit 1325 is an up flowing conduit. Conduit wall 1320 has coupled thereto one or more heat transfer enhancement structures 1330. Here, the fin structures 1330 may enhance the heat transfer characteristics of wall 1320 by creating more conductive surface areas.

**[0068]** Referring now to FIG. 14, a cross section 1400 similar to the conduits of FIG. 11, is depicted. Section 1400 includes conduit wall 1410 forming conduit 1415. In one exemplary embodiment, conduit 1415 may be the up flowing conduit as depicted in Fig. 9. Alternatively, in another exemplary embodiment, conduit 1415 may be the down flowing conduit. Within conduit 1415 is a second conduit wall 1420 forming a conduit 1425. Conduit 1425 may form a down flowing conduit, however as described above, other exemplary embodiments may dictate that conduit 1425 is an up flowing conduit. Conduit wall 1420 has a scalloped shape in order to increase the surface area exposed to water flowing through conduit 1415. Here, the scalloped structures 1420 may enhance the heat transfer characteristics of wall 1420 by creating more conductive surface areas. In other exemplary embodiments other geometries may be used for creating beneficial heat transfer characteristics. Further, other structures such as heat pipes, heat exchangers may be used. Also, other ways of transferring heat from one flow to another flow, such as but not limited to flow mixing may be used.

**[0069]** In one exemplary embodiment, the water property alteration system may use lateral thermal heat transfer from warmer down flowing water to cooler external water. In another exemplary embodiment, external water may be upwelling, in counterflow with the down flowing water. Up flow may be driven by the heat input, and up flow may include salinity contributions to aid in buoyancy. In yet another embodiment, the system may have a single down flow conduit. Up flowing external

water may be enclosed within a separate conduit, or may be free, not confined to a conduit. Up flow and down flow water may be confined within separate conduits of a common master conduit, for example. Down flow conduits may be surrounded by up flow conduits, or up flow conduits may be surrounded by down flow conduits. The system may have multiple or up flow conduits. The system may also include a big up flow conduit, enclosing a bunch of smaller area down flow conduits. Alternatively the system may include a big down flow conduit, enclosing a bunch of smaller cross sectional area up flow conduits.

**[0070]**In one exemplary embodiment, heat transfer may be conductive, through the surfaces separating the down flow water from the external up flow water. Surfaces may be crenulated to increase heat transfer area. Heat transfer can use heat-transfer coupling, such as heat pipes or the like. Heat transfer coupling may vary with depth (e.g., by controlling the contact area or the thermal conductivity). At the top end, up flowing water may be guided laterally away from the inlet to the wave-topping device. Up flow discharge may be at surface, or may be done at any desired depth below the surface. At the bottom end, either the discharge of the down flowing water, or the inlet to up flowing water may be guided away from each other. They can occur at different depths or at different lateral locations. In one embodiment the system may have multiple inlets and/or outlets at same and or different depths.

**[0071]**In one exemplary embodiment, the system may use down flow to sink CO<sub>2</sub> or other material from surface layers to deeper ocean. In another embodiment, the system may use up flow to lift nutrients or other material from ocean depths to surface layers. In yet another exemplary embodiment, the amount of up flow and/or down flow can be monitored and reported. This can involve the amount of water and/or the amount of specified material (e.g., CO<sub>2</sub>, nutrients) in it.

**[0072]**In accordance with other exemplary embodiments, the conduits may have internal-structures or wall-shapes designed to aid thermal transport from middle to edge of each conduit. Also, the system may include heatpipes, heat exchangers, or use flow mixing to enhance heat transfer.

**[0073]**Referring now to FIG. 15, an exemplary embodiment of a water property alteration system 1500 is depicted. Water property alteration system 1500 includes a

water capture structure 1510 having a ramp structure 1515 coupled thereto. Waves 1525 are depicted impinging on water capture structure 1515 as earlier described. Water capture structure 1510 partially forms conduit 1520. Conduit 1520 is also made of a flexible, extensible, or baffled section 1540 that is coupled between section 1510 and an exit section 1530. In accordance with an exemplary embodiment, it may be desirable to have a section 1540 to allow section 1510 to move in response to wave action or other forces relative to section 1510, as depicted in FIG. 16. In an exemplary embodiment, the extensibility may be controlled by cables 1550 and tensioners 1560 or by any of a variety of other techniques that may control the extensibility of section 1540. Such extending action may be actively or passively controlled.

**[0074]**In a general sense, those skilled in the art will recognize that the various embodiments described herein can be implemented, individually and/or collectively, by various types of electro-mechanical systems having a wide range of electrical components such as hardware, software, firmware, or virtually any combination thereof; and a wide range of components that may impart mechanical force or motion such as rigid bodies, spring or torsional bodies, hydraulics, and electrically, magnetically or electromagnetically actuated devices, or virtually any combination thereof. Consequently, as used herein "electro-mechanical system" includes, but is not limited to, electrical circuitry operably coupled with a transducer (e.g., an actuator, a motor, a piezoelectric crystal, etc.), electrical circuitry having at least one discrete electrical circuit, electrical circuitry having at least one integrated circuit, electrical circuitry having at least one application-specific integrated circuit, electrical circuitry forming a general purpose computing device configured by a computer program (e.g., a general purpose computer configured by a computer program which at least partially carries out processes and/or devices described herein, or a microprocessor configured by a computer program which at least partially carries out processes and/or devices described herein), electrical circuitry forming a memory device (e.g., forms of random access memory), electrical circuitry forming a communications device (e.g., a modem, communications switch, or optical-electrical equipment), and any non-electrical analog thereto, such as optical, mechanical, fluidic or other analogs. Those skilled in the art will also appreciate that examples of electro-mechanical systems include but

are not limited to a variety of consumer electronics systems, as well as other systems such as motorized transport systems, factory automation systems, security systems, and communication/computing systems. Those skilled in the art will recognize that electro-mechanical as used herein is not necessarily limited to a system that has both electrical and mechanical actuation except as context may dictate otherwise.

**[0075]** In a general sense, those skilled in the art will recognize that the various aspects described herein which can be implemented, individually and/or collectively, by a wide range of hardware, software, firmware, or any combination thereof can be viewed as being composed of various types of "electrical circuitry." Consequently, as used herein "electrical circuitry" includes, but is not limited to, electrical circuitry having at least one discrete electrical circuit, electrical circuitry having at least one integrated circuit, electrical circuitry having at least one application specific integrated circuit, electrical circuitry forming a general purpose computing device configured by a computer program (e.g., a general purpose computer configured by a computer program which at least partially carries out processes and/or devices described herein, or a microprocessor configured by a computer program which at least partially carries out processes and/or devices described herein), electrical circuitry forming a memory device (e.g., forms of random access memory), and/or electrical circuitry forming a communications device (e.g., a modem, communications switch, or optical-electrical equipment). Those having skill in the art will recognize that the subject matter described herein may be implemented in an analog or digital fashion or some combination thereof.

**[0076]** Those skilled in the art will recognize that it is common within the art to implement devices and/or processes and/or systems in the fashion(s) set forth herein, and thereafter use engineering and/or business practices to integrate such implemented devices and/or processes and/or systems into more comprehensive devices and/or processes and/or systems. That is, at least a portion of the devices and/or processes and/or systems described herein can be integrated into other devices and/or processes and/or systems via a reasonable amount of experimentation. Those having skill in the art will recognize that examples of such other devices and/or processes and/or systems might include – as appropriate to context and application -- all or part of devices

and/or processes and/or systems of (a) an air conveyance (e.g., an airplane, rocket, hovercraft, helicopter, etc.) , (b) a ground conveyance (e.g., a car, truck, locomotive, tank, armored personnel carrier, etc.), (c) a building (e.g., a home, warehouse, office, etc.), (d) an appliance (e.g., a refrigerator, a washing machine, a dryer, etc.), (e) a communications system (e.g., a networked system, a telephone system, a Voice over IP system, etc.), (f) a business entity (e.g., an Internet Service Provider (ISP) entity such as Comcast Cable, Quest, Southwestern Bell, etc), or (g) a wired/wireless services entity such as Sprint, Cingular, Nextel, etc.), etc.

**[0077]**One skilled in the art will recognize that the herein described components (e.g., steps), devices, and objects and the discussion accompanying them are used as examples for the sake of conceptual clarity and that various configuration modifications are within the skill of those in the art. Consequently, as used herein, the specific exemplars set forth and the accompanying discussion are intended to be representative of their more general classes. In general, use of any specific exemplar herein is also intended to be representative of its class, and the non-inclusion of such specific components (e.g., steps), devices, and objects herein should not be taken as indicating that limitation is desired.

**[0078]**With respect to the use of substantially any plural and/or singular terms herein, those having skill in the art can translate from the plural to the singular and/or from the singular to the plural as is appropriate to the context and/or application. The various singular/plural permutations are not expressly set forth herein for sake of clarity.

**[0079]**The herein described subject matter sometimes illustrates different components contained within, or connected with, different other components. It is to be understood that such depicted architectures are merely exemplary, and that in fact many other architectures can be implemented which achieve the same functionality. In a conceptual sense, any arrangement of components to achieve the same functionality is effectively "associated" such that the desired functionality is achieved. Hence, any two components herein combined to achieve a particular functionality can be seen as "associated with" each other such that the desired functionality is achieved, irrespective of architectures or intermedial components. Likewise, any two

components so associated can also be viewed as being "operably connected", or "operably coupled", to each other to achieve the desired functionality, and any two components capable of being so associated can also be viewed as being "operably couplable", to each other to achieve the desired functionality. Specific examples of operably couplable include but are not limited to physically mateable and/or physically interacting components and/or wirelessly interactable and/or wirelessly interacting components and/or logically interacting and/or logically interactable components.

**[0080]** While particular aspects of the present subject matter described herein have been shown and described, it will be apparent to those skilled in the art that, based upon the teachings herein, changes and modifications may be made without departing from the subject matter described herein and its broader aspects and, therefore, the appended claims are to encompass within their scope all such changes and modifications as are within the true spirit and scope of the subject matter described herein. Furthermore, it is to be understood that the invention is defined by the appended claims. It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims (e.g., bodies of the appended claims) are generally intended as "open" terms (e.g., the term "including" should be interpreted as "including but not limited to," the term "having" should be interpreted as "having at least," the term "includes" should be interpreted as "includes but is not limited to," etc.). It will be further understood by those within the art that if a specific number of an introduced claim recitation is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the following appended claims may contain usage of the introductory phrases "at least one" and "one or more" to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles "a" or "an" limits any particular claim containing such introduced claim recitation to inventions containing only one such recitation, even when the same claim includes the introductory phrases "one or more" or "at least one" and indefinite articles such as "a" or "an" (e.g., "a" and/or "an" should typically be interpreted to mean "at least one" or "one or more");

the same holds true for the use of definite articles used to introduce claim recitations. In addition, even if a specific number of an introduced claim recitation is explicitly recited, those skilled in the art will recognize that such recitation should typically be interpreted to mean at least the recited number (e.g., the bare recitation of "two recitations," without other modifiers, typically means at least two recitations, or two or more recitations). Furthermore, in those instances where a convention analogous to "at least one of A, B, and C, etc." is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (e.g., "a system having at least one of A, B, and C" would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). In those instances where a convention analogous to "at least one of A, B, or C, etc." is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (e.g., "a system having at least one of A, B, or C" would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). It will be further understood by those within the art that virtually any disjunctive word and/or phrase presenting two or more alternative terms, whether in the description, claims, or drawings, should be understood to contemplate the possibilities of including one of the terms, either of the terms, or both terms. For example, the phrase "A or B" will be understood to include the possibilities of "A" or "B" or "A and B."

**[0081]** While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. The various aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope and spirit being indicated by the following claims.

## CLAIMS

1. A system for altering water properties, comprising:  
a water capture structure configured to capture wave water lapping over at least one wall of the water capture structure, the at least one wall extending at least above a nominal surface water level, the captured wave water providing a pressure head to force the water downward; and  
at least one conduit extending downward from the water capture structure, the at least one conduit having a length extending to a depth at which at least one property of water at the depth differs substantially from that of water at the surface, the at least one conduit being configured to provide thermal energy to water outside of the at least one conduit, the at least one conduit having at least one conduit wall.
2. The system of claim 1, wherein the at least one wall of the water capture structure also forms the conduit.
3. The system of claim 1, wherein the conduit has substantially the same cross sectional area as the cross sectional area of the water capture structure that extends above the water.
4. The system of claim 1, wherein the conduit has a larger cross sectional area than the cross sectional area of the water capture structure that extends above the water.
5. The system of claim 1, wherein the conduit has a smaller cross sectional area than the cross sectional area of the water capture structure that extends above the water.
6. The system of claim 1, wherein the conduit is substantially conical.
7. The system of claim 1, wherein the conduit is substantially cylindrical.

8. The system of claim 1, wherein the conduit is at least partially tapered.
9. The system of claim 1, wherein the at least one wall is configured to be buoyant.
10. The system of claim 1, wherein the water capture structure is buoyant.
11. The system of claim 1, wherein at least a portion of at least one of the water capture structure or the conduit comprises a material substantially resistant to degradation in ambient water.
12. The system of claim 1, wherein at least a portion of at least one of the water capture structure or conduit comprises concrete.
13. The system of claim 1, wherein at least a portion of at least one of the water capture structure or conduit comprises polymers.
14. The system of claim 1, wherein at least a portion of at least one of the water capture structure or conduit comprises at least one of metals or metal alloys.
15. The system of claim 1, wherein at least a portion of at least one of the water capture structure or conduit comprises composite materials.
16. The system of claim 1, wherein at least a portion of the water capture structure extends above the water surface but below the height of at least some waves striking the wall.
17. The system of claim 1, wherein the height of a wall varies around the water capture structure.
18. The system of claim 1, wherein the conduit extends to at least the depth of the thermocline.
19. The system of claim 1, wherein the height of at least a portion of a wall of the water capture structure is controlled.

20. The system of claim 1, wherein at least a portion of the height of at least one wall of the water capture structure is controlled relative to waves incident on the wall.
21. The system of claim 1, wherein at least a portion of the height of at least one wall of the water capture structure is controlled relative to the mean surface water level.
22. The system of claim 1, further comprising:  
a keel.
23. The system of claim 1, wherein at least one of the water capture structure or the conduit has a substantially circular cross-section.
24. The system of claim 1, wherein at least one of the water capture structure or the conduit has a substantially non-circular cross-section.
25. The system of claim 1, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to affect orientation of the water capture structure.
26. The system of claim 1, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to affect orientation of the water capture structure so that it aligns with waves incident on the water capture structure in a predefined manner.
27. The system of claim 1, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to affect orientation of the water capture structure so that it aligns with waves incident on the water capture structure in a controllable manner.
28. The system of claim 1, wherein at least one of the water capture structure or the conduit contains at least one internal structure that is configured to maintain a desired cross sectional shape or condition in at least a portion of the water capture structure or conduit.

29. The system of claim 1, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to reduce drag when moving relative to the water.
30. The system of claim 1, wherein the at least one conduit is coupled to a bottom portion and the bottom portion is submerged.
31. The system of claim 1, wherein the system is coupled to at least one subsurface weight.
32. The system of claim 1, wherein the at least one wall of the water capture structure is at least partially thermally insulated.
33. The system of claim 1, wherein the conduit is at least partially thermally insulated.
34. The system of claim 1, wherein the length of the conduit is configured to be controlled.
35. The system of claim 1, wherein the conduit includes at least one aperture to expel water contained therein.
36. The system of claim 1, wherein the conduit includes at least one aperture and the at least one aperture is located along the length of the conduit.
37. The system of claim 1, further comprising:  
  
a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure.
38. The system of claim 1, further comprising:  
  
a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of

waves incident on the water capture structure, the wave alteration structure being at least partially a ramp structure.

39. The system of claim 1, further comprising:

a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being a passive structure.

40. The system of claim 1, further comprising:

a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being an active structure.

41. The system of claim 1, further comprising:

a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being a powered movable structure.

42. The system of claim 1, further comprising:

an orientation control structure configured to alter the orientation of the water capture structure.

43. The system of claim 1, wherein the water capture structure has internal structure to modify wave dynamics or to modulate sloshing of water within it.

44. The system of claim 1, further comprising:

at least one weight coupled to the conduit.

45. The system of claim 1, wherein the conduit is not vertical.
46. The system of claim 1, wherein the conduit includes more than one conduit.
47. The system of claim 1, wherein the conduit comprises branches.
48. The system of claim 1, wherein the system has at least one controllable portal which enables a degree of control of water flow through the conduit.
49. The system of claim 1, wherein the orientation of the water capture structure is controlled.
50. The system of claim 1, wherein the water capture structure has a horizontal cross sectional area that is substantially greater than a horizontal cross sectional area of the conduit.
51. The system of claim 1, further comprising:  
a power source.
52. The system of claim 1, further comprising:  
a solar power source.
53. The system of claim 1, further comprising:  
a wind derived power source.
54. The system of claim 1, further comprising:  
a water-motion derived power source.
55. The system of claim 1, further comprising:  
a turbine in the conduit.
56. The system of claim 1, further comprising:  
a turbine in the conduit and being driven by the flow of water in at least a portion  
of the conduit .
57. The system of claim 1, further comprising:

- a turbine in the conduit being driven by the flow of water in at least a portion of the conduit and generating power.
58. The system of claim 1, further comprising:  
a turbine in the conduit being driven by the flow of water in at least a portion of the conduit and being used to control buoyancy.
59. The system of claim 1, further comprising:  
a turbine in the conduit, the turbine being powered and aiding in moving water in at least a portion of the conduit.
60. The system of claim 1, further comprising:  
a turbine in the conduit, the turbine being powered and the turbine being used to control the flow of water in at least a portion of the conduit.
61. The system of claim 1, further comprising:  
a propulsion system, the propulsion system being powered.
62. The system of claim 1, further comprising:  
a propulsion system, the propulsion system comprising a wind driven structure.
63. The system of claim 1, further comprising:  
a propulsion system, the propulsion system being powered and used to control movement of the holding vessel.
64. The system of claim 1, further comprising:  
a propulsion system, the propulsion system being powered and including at least one propeller.
65. The system of claim 1, further comprising:  
a propulsion system, the propulsion system being powered and including at least one turbine.
66. The system of claim 1, further comprising:

- a propulsion system, the propulsion system being powered and including at least one movable or actuated surface.
67. The system of claim 1, further comprising:  
a propulsion system, the propulsion system being powered and including at least one movable or actuated fin, rudder, or sail.
68. The system of claim 1, wherein at least part of the water capture structure wall has openings.
69. The system of claim 1, wherein at least part of the water capture structure wall has openings and the openings are configured to allow water flow substantially in only one direction.
70. The system of claim 1, wherein at least part of the water capture structure wall has openings and the openings are controllable.
71. The system of claim 1, wherein the at least one wall of the water capture structure comprises multiple wall segments.
72. The system of claim 1, wherein the at least one wall of the water capture structure comprises multiple wall segments, the multiple wall segments forming a closed shape.
73. The system of claim 1, wherein the at least one wall of the water capture structure comprises multiple wall segments, at least one of the multiple wall segments being curved.
74. The system of claim 1, wherein the at least one wall of the water capture structure comprises multiple wall segments and at least one of the multiple wall segments is movable or actuated.
75. The system of claim 1, wherein the system is anchored to at least one of the floor of the water body, or to a sea-anchor.

76. The system of claim 1, wherein the location of the system is movable.
77. The system of claim 1, wherein the system is movable and is movable using power derived from a turbine positioned in the conduit and being driven by the flow of water in at least a portion of the conduit.
78. The system of claim 1, wherein the conduit includes at least one opening that directs water out of the conduit in a direction other than downward.
79. The system of claim 1, wherein the conduit includes at least one opening that directs water out of the conduit in a direction other than downward, and the amount of flow through the opening is controllable.
80. The system of claim 1, wherein the conduit includes at least one opening that directs water out of the conduit in a direction other than downward, and the direction of the water flow is controllable.
81. The system of claim 1, wherein the conduit includes one or more openings located at preferred depths.
82. The system of claim 1, wherein the conduit comprises multiple openings distributed over an area to effect, at depth, rapid dilution of outflow water with ambient water.
83. The system of claim 1, wherein the system is movable by coupling the vessel to a propulsive vessel.
84. The system of claim 1, further comprising:  
a wind manipulating structure to harness wind power for moving the system.
85. The system of claim 1, further comprising:  
a wind manipulating structure to harness wind power for controlling the amount that the at least one wall of the water capture structure extends above the local water surface.

86. The system of claim 1, further comprising:  
a wind manipulating structure to harness wind power for controlling the amount that the at least one wall of the water capture structure extends above the local water surface and the control comprises a passive control.
87. The system of claim 1, further comprising:  
a wind manipulating structure to harness wind power for controlling the amount that the at least one wall of the water capture structure extends above the local water surface and the control comprises an active control.
88. The system of claim 1, wherein the system is used to influence coupling between water and one or more atmospheric constituents or properties.
89. The system of claim 1, further comprising:  
a communications system.
90. The system of claim 1, further comprising:  
a processor.
91. The system of claim 1, further comprising:  
at least one sensor.
92. The system of claim 1, further comprising:  
at least one sensor, the sensor being at least one of a location sensor, a flow sensor, a pressure sensor, a composition sensor, or a temperature sensor.
93. The system of claim 1, wherein the water comprises ocean water.
94. The system of claim 1, wherein the water comprises lake water.
95. The system of claim 1, wherein the water comprises reservoir water.
96. The system of claim 1, wherein the water comprises river water.

97. The system of claim 1, wherein the water capture structure and the conduit have substantially the same cross sectional area and shape.
98. The system of claim 1, wherein at least one of the cross sectional area or the shape of the conduit varies along the length of the conduit.
99. The system of claim 1, wherein the buoyancy of the water capture structure can be varied.
100. The system of claim 1, wherein the buoyancy of a wall of the water capture structure can be varied.
101. The system of claim 1, wherein at least a portion of at least one of the water capture structure or the conduit comprises a fabric.
102. The system of claim 1, wherein the properties being altered comprise at least one of, water temperature, dissolved-gas concentration, water chemical composition or water biological composition.
103. The system of claim 1, wherein the system is used to influence biological activity.
104. The system of claim 1, further comprising at least one second conduit adjacent the at least one conduit, wherein the at least second conduit carries water in the upward direction and is in thermal communication with the at least one conduit.
105. The system of claim 1, further comprising at least one second conduit adjacent the at least one conduit, wherein the at least second conduit carries water in the upward direction and is in thermal communication with the at least one conduit, such that the at least one conduit is external the at least one second conduit.
106. The system of claim 1, further comprising at least one second conduit adjacent the at least one conduit, wherein the at least second conduit carries water in the upward direction and is in thermal communication with the at least one conduit, such that the at least one second conduit is external the at least one conduit.

107. The system of claim 1, wherein the at least one conduit includes heat transfer structures.
108. The system of claim 1, wherein the at least one conduit includes heat transfer structures and the heat transfer structures include heat pipes.
109. The system of claim 1, wherein the at least one conduit includes heat transfer structures and the heat transfer structures include fins.
110. The system of claim 104, wherein the conduit and the second conduit are separated by a wall.
111. The system of claim 104, wherein a first conduit and a second conduit are separated by a wall and the wall between the first conduit and the second conduit is configured to transfer thermal energy there through.
112. The system of claim 104, wherein a first conduit and a second conduit are separated by a wall and the wall varies in dimension along the length of the conduit.
113. The system of claim 1, wherein heat transfer properties of the at least one conduit vary along its length.
114. The system of claim 1, wherein heat transfer properties of the at least one conduit are controllable.
115. The system of claim 1, wherein the system includes a plurality of first conduits providing downward flow and one or more second conduits providing upward flow, the first conduit and the second conduit at least partially in thermal communication.
116. The system of claim 104, wherein at least one conduit extends to a different length than a second conduit.

117. The system of claim 104, wherein the system includes a sensing device to sense the flow property through at least one conduit.
118. The system of claim 1, wherein the system includes more than one conduit and the conduits have different entrance or exit directions compared with other conduits.
119. The system of claim 104, wherein the system includes a sensing device to sense a flow property through the at least one conduit and sensor output is recorded.
120. The system of claim 104, wherein the at least one second conduits each include more than one inlet or outlet.
121. The system of claim 104, wherein the at least one second conduits each include controllable inlets or outlets.
122. The system of claim 104, wherein a heat transfer structure is configured to enhance heat transfer between the at least one conduit and the at least one second conduit.
123. The system of claim 104, wherein the entrance to the at least one second conduit is at a different depth than the exit from the at least one conduit.
124. The system of claim 104, wherein the exit from the at least one second conduit is at a different depth than the entrance to the at least one conduit.
125. The system of claim 104, wherein at least one of the exit or entrance of the at least one conduit is laterally displaced from at least one of the exit or entrance of the at least one second conduit.

126. A system for altering water properties, comprising:  
a water capture structure configured to capture water, the water capture structure formed as a container having at least one wall extending at least above a nominal surface water level and the water capture structure being at least partially submerged, the captured water providing a pressure head to force the water downward;  
at least one conduit extending downward from the water capture structure, the at least one conduit having a length, the at least one conduit being configured to provide thermal energy to water outside of the at least one conduit, the at least one conduit having at least one conduit wall;  
at least one aperture formed in at least one of the water capture structure or the at least one conduit; and  
at least one one-way valve coupled to the at least one aperture and allowing flow of water in only one direction.
127. The system of claim 126, wherein the aperture is an entry aperture.
128. The system of claim 126, wherein the at least one wall of the water capture structure also forms the conduit.
129. The system of claim 126, wherein the conduit has substantially the same cross sectional area as the cross sectional area of the water capture structure that extends above the water.
130. The system of claim 126, wherein the conduit has a larger cross sectional area than the cross sectional area of the water capture structure that extends above the water.
131. The system of claim 126, wherein the conduit has a smaller cross sectional area than the cross sectional area of the water capture structure that extends above the water.
132. The system of claim 126, wherein the conduit is substantially conical.

133. The system of claim 126, wherein the conduit is substantially cylindrical.
134. The system of claim 126, wherein the conduit is at least partially tapered.
135. The system of claim 126, wherein the at least one wall is configured to be buoyant.
136. The system of claim 126, wherein the water capture structure is buoyant.
137. The system of claim 126, wherein at least a portion of at least one of the holding vessel or the conduit comprises a material substantially resistant to degradation in ambient water.
138. The system of claim 126, wherein at least a portion of at least one of the holding vessel or conduit comprises concrete.
139. The system of claim 126, wherein at least a portion of at least one of the holding vessel or conduit comprises polymers.
140. The system of claim 126, wherein at least a portion of at least one of the holding vessel or conduit comprises at least one of metals or metal alloys.
141. The system of claim 126, wherein at least a portion of at least one of the holding vessel or conduit comprises composite materials.
142. The system of claim 126, wherein at least a portion of the water capture structure extends above the water surface but below the height of at least some waves striking the wall.
143. The system of claim 126, wherein the height of a wall varies around the water capture structure.
144. The system of claim 126, wherein the conduit extends to at least the depth of the thermocline.

145. The system of claim 126, wherein the height of at least a portion of a wall of the water capture structure is controlled.
146. The system of claim 126, wherein at least a portion of the height of at least one wall of the water capture structure is controlled relative to waves incident on the wall.
147. The system of claim 126, wherein at least a portion of the height of at least one wall of the water capture structure is controlled relative to the mean surface water level.
148. The system of claim 126, further comprising:  
  
a keel.
149. The system of claim 126, wherein at least one of the water capture structure or the conduit has a substantially circular cross-section.
150. The system of claim 126, wherein at least one of the water capture structure or the conduit has a substantially non-circular cross-section.
151. The system of claim 126, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to affect orientation of the water capture structure.
152. The system of claim 126, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to affect orientation of the water capture structure so that it aligns with waves incident on the water capture structure in a predefined manner.
153. The system of claim 126, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to affect orientation of the water capture structure so that it aligns with waves incident on the water capture structure in a controllable manner.

154. The system of claim 126, wherein at least one of the water capture structure or the conduit contains at least one internal structure that is configured to maintain a desired cross sectional shape or condition in at least a portion of the water capture structure or conduit.
155. The system of claim 126, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to reduce drag when moving relative to the water.
156. The system of claim 126, wherein the at least one conduit is coupled to a bottom portion and the bottom portion is submerged.
157. The system of claim 126, wherein the system is coupled to at least one subsurface weight.
158. The system of claim 126, wherein the at least one wall of the water capture structure is at least partially thermally insulated.
159. The system of claim 126, wherein the conduit is at least partially thermally insulated.
160. The system of claim 126, wherein the length of the conduit is configured to be controlled.
161. The system of claim 126, wherein the conduit includes at least one aperture to expel water contained therein.
162. The system of claim 126, wherein the conduit includes at least one aperture and the at least one aperture is located along the length of the conduit.
163. The system of claim 126, further comprising:  
  
a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure.

164. The system of claim 126, further comprising:

a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being at least partially a ramp structure.

165. The system of claim 126, further comprising:

a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being a passive structure.

166. The system of claim 126, further comprising:

a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being an active structure.

167. The system of claim 126, further comprising:

a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being a powered movable structure.

168. The system of claim 126, further comprising:

an orientation control structure configured to alter the orientation of the water capture structure.

169. The system of claim 126, wherein the water capture structure has internal structure to modify wave dynamics or to modulate sloshing of water within it.

170. The system of claim 126, further comprising:  
at least one weight coupled to the conduit.
171. The system of claim 126, wherein the conduit is not vertical.
172. The system of claim 126, wherein the conduit includes more than one conduit.
173. The system of claim 126, wherein the conduit comprises branches.
174. The system of claim 126, wherein the system has at least one controllable portal which enables a degree of control of water flow through the conduit.
175. The system of claim 126, wherein the orientation of the water capture structure is controlled.
176. The system of claim 126, wherein the water capture structure has a horizontal cross sectional area that is substantially greater than a horizontal cross sectional area of the conduit.
177. The system of claim 126, further comprising:  
a power source.
178. The system of claim 126, further comprising:  
a solar power source.
179. The system of claim 126, further comprising:  
a wind derived power source.
180. The system of claim 126, further comprising:  
a water-motion derived power source.
181. The system of claim 126, further comprising:  
a turbine in the conduit.
182. The system of claim 126, further comprising:

- a turbine in the conduit and being driven by the flow of water in at least a portion of the conduit .
183. The system of claim 126, further comprising:  
a turbine in the conduit being driven by the flow of water in at least a portion of the conduit and generating power.
184. The system of claim 126, further comprising:  
a turbine in the conduit being driven by the flow of water in at least a portion of the conduit and being used to control buoyancy.
185. The system of claim 126, further comprising:  
a turbine in the conduit, the turbine being powered and aiding in moving water in at least a portion of the conduit.
186. The system of claim 126, further comprising:  
a turbine in the conduit, the turbine being powered and the turbine being used to control the flow of water in at least a portion of the conduit.
187. The system of claim 126, further comprising:  
a propulsion system, the propulsion system being powered.
188. The system of claim 126, further comprising:  
a propulsion system, the propulsion system comprising a wind driven structure.
189. The system of claim 126, further comprising:  
a propulsion system, the propulsion system being powered and used to control movement of the holding vessel.
190. The system of claim 126, further comprising:  
a propulsion system, the propulsion system being powered and including at least one propeller.
191. The system of claim 126, further comprising:

- a propulsion system, the propulsion system being powered and including at least one turbine.
192. The system of claim 126, further comprising:  
a propulsion system, the propulsion system being powered and including at least one movable or actuated surface.
193. The system of claim 126, further comprising:  
a propulsion system, the propulsion system being powered and including at least one movable or actuated fin, rudder, or sail.
194. The system of claim 126, wherein at least part of the water capture structure wall has openings.
195. The system of claim 126, wherein at least part of the water capture structure wall has openings and the openings are configured to allow water flow substantially in only one direction.
196. The system of claim 126, wherein at least part of the water capture structure wall has openings and the openings are controllable.
197. The system of claim 126, wherein the at least one wall of the water capture structure comprises multiple wall segments.
198. The system of claim 126, wherein the at least one wall of the water capture structure comprises multiple wall segments, the multiple wall segments forming a closed shape.
199. The system of claim 126, wherein the at least one wall of the water capture structure comprises multiple wall segments, at least one of the multiple wall segments being curved.
200. The system of claim 126, wherein the at least one wall of the water capture structure comprises multiple wall segments and at least one of the multiple wall segments is movable or actuated.

201. The system of claim 126, wherein the system is anchored to at least one of the floor of the water body, or to a sea-anchor.
202. The system of claim 126, wherein the location of the system is movable.
203. The system of claim 126, wherein the system is movable and is movable using power derived from a turbine positioned in the conduit and being driven by the flow of water in at least a portion of the conduit.
204. The system of claim 126, wherein the conduit includes at least one opening that directs water out of the conduit in a direction other than downward.
205. The system of claim 126, wherein the conduit includes at least one opening that directs water out of the conduit in a direction other than downward, and the amount of flow through the opening is controllable.
206. The system of claim 126, wherein the conduit includes at least one opening that directs water out of the conduit in a direction other than downward, and the direction of the water flow is controllable.
207. The system of claim 126, wherein the conduit includes one or more openings located at preferred depths.
208. The system of claim 126, wherein the conduit comprises multiple openings distributed over an area to effect, at depth, rapid dilution of outflow water with ambient water.
209. The system of claim 126, wherein the system is movable by coupling the vessel to a propulsive vessel.
210. The system of claim 126, further comprising:  
a wind manipulating structure to harness wind power for moving the system.
211. The system of claim 126, further comprising:

- a wind manipulating structure to harness wind power for controlling the amount that the at least one wall of the water capture structure extends above the local water surface.
212. The system of claim 126, further comprising:  
a wind manipulating structure to harness wind power for controlling the amount that the at least one wall of the water capture structure extends above the local water surface and the control comprises a passive control.
213. The system of claim 126, further comprising:  
a wind manipulating structure to harness wind power for controlling the amount that the at least one wall of the water capture structure extends above the local water surface and the control comprises an active control.
214. The system of claim 126, wherein the system is used to influence coupling between water and one or more atmospheric constituents or properties.
215. The system of claim 126, further comprising:  
a communications system.
216. The system of claim 126, further comprising:  
a processor.
217. The system of claim 126, further comprising:  
at least one sensor.
218. The system of claim 126, further comprising:  
at least one sensor, the sensor being at least one of a location sensor, a flow sensor, a pressure sensor, a composition sensor, or a temperature sensor.
219. The system of claim 126, wherein the water comprises ocean water.
220. The system of claim 126, wherein the water comprises lake water.

221. The system of claim 126, wherein the water comprises reservoir water.
222. The system of claim 126, wherein the water comprises river water.
223. The system of claim 126, wherein the water capture structure and the conduit have substantially the same cross sectional area and shape.
224. The system of claim 126, wherein at least one of the cross sectional area or the shape of the conduit varies along the length of the conduit.
225. The system of claim 126, wherein the buoyancy of the water capture structure can be varied.
226. The system of claim 126, wherein the buoyancy of a wall of the water capture structure can be varied.
227. The system of claim 126, wherein at least a portion of at least one of the water capture structure or the conduit comprises a fabric.
228. The system of claim 126, wherein the properties being altered comprise at least one of, water temperature, dissolved-gas concentration, water chemical composition or water biological composition.
229. The system of claim 126, wherein the system is used to influence biological activity.
230. The system of claim 126, further comprising at least one second conduit adjacent the at least one conduit, wherein the at least second conduit carries water in the upward direction and is in thermal communication with the at least one conduit.
231. The system of claim 126, further comprising at least one second conduit adjacent the at least one conduit, wherein the at least second conduit carries water in the upward direction and is in thermal communication with the at least one conduit, such that the at least one conduit is external the at least one second conduit.

232. The system of claim 126, further comprising at least one second conduit adjacent the at least one conduit, wherein the at least second conduit carries water in the upward direction and is in thermal communication with the at least one conduit, such that the at least one second conduit is external the at least one conduit.
233. The system of claim 126, wherein the at least one conduit includes heat transfer structures.
234. The system of claim 126, wherein the at least one conduit includes heat transfer structures and the heat transfer structures include heat pipes.
235. The system of claim 126, wherein the at least one conduit includes heat transfer structures and the heat transfer structures include fins.
236. The system of claim 126, wherein a first conduit and a second conduit are separated by a wall.
237. The system of claim 126, wherein a first conduit and a second conduit are separated by a wall and the wall between the first conduit and the second conduit is configured to transfer thermal energy there through.
238. The system of claim 126, wherein a first conduit and a second conduit are separated by a wall and the wall varies in dimension along the length.
239. The system of claim 126, wherein heat transfer properties of the at least one conduit vary along its length.
240. The system of claim 126, wherein heat transfer properties of the at least one conduit are controllable.
241. The system of claim 126, wherein the system includes a plurality of first conduits providing downward flow and one or more second conduits providing upward flow, the first conduit and the second conduit at least partially in thermal communication.

242. The system of claim 126, wherein at least one conduit extends to a different length than a second conduit.
243. The system of claim 126, wherein the system includes a sensing device to sense the flow rate through at least one conduit.
244. The system of claim 126, wherein the system includes more than one conduit and the conduits have different entrance or exit directions compared with other conduits.
245. The system of claim 126, wherein the system includes a sensing device to sense the flow rate through the at least one conduit and sensor output is recorded.
246. The system of claim 126, wherein the at least one conduits each include more than one inlet or outlet.
247. The system of claim 126, wherein the at least one conduits each include controllable inlets or outlets.

248. A system for altering conditions below the surface of the water, comprising:  
a wave water capture structure configured to hold water and to produce a pressure head from captured wave water, the wave water capture structure having at least one wall, the at least one wall extending at least above a nominal local surface water level;  
at least one conduit extending downward from the water capture structure, the at least one conduit having a length extending to a depth below the local water surface, the at least one conduit being configured to provide thermal energy to water outside of the at least one conduit, the at least one conduit having at least one conduit wall; and  
a control system configured to vary the rate of thermal energy transfer to water outside of the at least one conduit as a way to effect the rate of flow of water through the at least one conduit.
249. The system of claim 248, wherein the wave water capture system is a wave topping device.
250. The system of claim 248, wherein the wave water capture system is a side entry device.
251. The system of claim 248, wherein the at least one wall of the water capture structure also forms the conduit.
252. The system of claim 248, wherein the conduit has substantially the same cross sectional area as the cross sectional area of the water capture structure that extends above the water.
253. The system of claim 248, wherein the conduit has a larger cross sectional area than the cross sectional area of the water capture structure that extends above the water.

254. The system of claim 248, wherein the conduit has a smaller cross sectional area than the cross sectional area of the water capture structure that extends above the water.
255. The system of claim 248, wherein the conduit is substantially conical.
256. The system of claim 248, wherein the conduit is substantially cylindrical.
257. The system of claim 248, wherein the conduit is at least partially tapered.
258. The system of claim 248, wherein the at least one wall is configured to be buoyant.
259. The system of claim 248, wherein the water capture structure is buoyant.
260. The system of claim 248, wherein at least a portion of at least one of the holding vessel or the conduit comprises a material substantially resistant to degradation in ambient water.
261. The system of claim 248, wherein at least a portion of at least one of the holding vessel or conduit comprises concrete.
262. The system of claim 248, wherein at least a portion of at least one of the holding vessel or conduit comprises polymers.
263. The system of claim 248, wherein at least a portion of at least one of the holding vessel or conduit comprises at least one of metals or metal alloys.
264. The system of claim 248, wherein at least a portion of at least one of the holding vessel or conduit comprises composite materials.
265. The system of claim 248, wherein at least a portion of the water capture structure extends above the water surface but below the height of at least some waves striking the wall.

266. The system of claim 248, wherein the height of a wall varies around the water capture structure.
267. The system of claim 248, wherein the conduit extends to at least the depth of the thermocline.
268. The system of claim 248, wherein the height of at least a portion of a wall of the water capture structure is controlled.
269. The system of claim 248, wherein at least a portion of the height of at least one wall of the water capture structure is controlled relative to waves incident on the wall.
270. The system of claim 248, wherein at least a portion of the height of at least one wall of the water capture structure is controlled relative to the mean surface water level.
271. The system of claim 248, further comprising:
  - a keel.
272. The system of claim 248, wherein at least one of the water capture structure or the conduit has a substantially circular cross-section.
273. The system of claim 248, wherein at least one of the water capture structure or the conduit has a substantially non-circular cross-section.
274. The system of claim 248, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to affect orientation of the water capture structure.
275. The system of claim 248, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to affect orientation of the water capture structure so that it aligns with waves incident on the water capture structure in a predefined manner.

276. The system of claim 248, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to affect orientation of the water capture structure so that it aligns with waves incident on the water capture structure in a controllable manner.
277. The system of claim 248, wherein at least one of the water capture structure or the conduit contains at least one internal structure that is configured to maintain a desired cross sectional shape or condition in at least a portion of the water capture structure or conduit.
278. The system of claim 248, wherein at least one of the water capture structure or the conduit has a cross sectional shape that is configured to reduce drag when moving relative to the water.
279. The system of claim 248, wherein the at least one conduit is coupled to a bottom portion and the bottom portion is submerged.
280. The system of claim 248, wherein the system is coupled to at least one subsurface weight.
281. The system of claim 248, wherein the at least one wall of the water capture structure is at least partially thermally insulated.
282. The system of claim 248, wherein the conduit is at least partially thermally insulated.
283. The system of claim 248, wherein the length of the conduit is configured to be controlled.
284. The system of claim 248, wherein the conduit includes at least one aperture to expel water contained therein.
285. The system of claim 248, wherein the conduit includes at least one aperture and the at least one aperture is located along the length of the conduit.

286. The system of claim 248, further comprising:  
a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure.
287. The system of claim 248, further comprising:  
a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being at least partially a ramp structure.
288. The system of claim 248, further comprising:  
a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being a passive structure.
289. The system of claim 248, further comprising:  
a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being an active structure.
290. The system of claim 248, further comprising:  
a wave alteration structure coupled to the at least one of the water capture structure or the at least one conduit and configured to change characteristics of waves incident on the water capture structure, the wave alteration structure being a powered movable structure.
291. The system of claim 248, further comprising:

- an orientation control structure configured to alter the orientation of the water capture structure.
292. The system of claim 248, wherein the water capture structure has internal structure to modify wave dynamics or to modulate sloshing of water within it.
293. The system of claim 248, further comprising:  
at least one weight coupled to the conduit.
294. The system of claim 248, wherein the conduit is not vertical.
295. The system of claim 248, wherein the conduit includes more than one conduit.
296. The system of claim 248, wherein the conduit comprises branches.
297. The system of claim 248, wherein the system has at least one controllable portal which enables a degree of control of water flow through the conduit.
298. The system of claim 248, wherein the orientation of the water capture structure is controlled.
299. The system of claim 248, wherein the water capture structure has a horizontal cross sectional area that is substantially greater than a horizontal cross sectional area of the conduit.
300. The system of claim 248, further comprising:  
a power source.
301. The system of claim 248, further comprising:  
a solar power source.
302. The system of claim 248, further comprising:  
a wind derived power source.
303. The system of claim 248, further comprising:  
a water-motion derived power source.

304. The system of claim 248, further comprising:  
a turbine in the conduit.
305. The system of claim 248, further comprising:  
a turbine in the conduit and being driven by the flow of water in at least a portion  
of the conduit .
306. The system of claim 248, further comprising:  
a turbine in the conduit being driven by the flow of water in at least a portion of  
the conduit and generating power.
307. The system of claim 248, further comprising:  
a turbine in the conduit being driven by the flow of water in at least a portion of  
the conduit and being used to control buoyancy.
308. The system of claim 248, further comprising:  
a turbine in the conduit, the turbine being powered and aiding in moving water in  
at least a portion of the conduit.
309. The system of claim 248, further comprising:  
a turbine in the conduit, the turbine being powered and the turbine being used to  
control the flow of water in at least a portion of the conduit.
310. The system of claim 248, further comprising:  
a propulsion system, the propulsion system being powered.
311. The system of claim 248, further comprising:  
a propulsion system, the propulsion system comprising a wind driven structure.
312. The system of claim 248, further comprising:  
a propulsion system, the propulsion system being powered and used to control  
movement of the holding vessel.
313. The system of claim 248, further comprising:

- a propulsion system, the propulsion system being powered and including at least one propeller.
314. The system of claim 248, further comprising:  
a propulsion system, the propulsion system being powered and including at least one turbine.
315. The system of claim 248, further comprising:  
a propulsion system, the propulsion system being powered and including at least one movable or actuated surface.
316. The system of claim 248, further comprising:  
a propulsion system, the propulsion system being powered and including at least one movable or actuated fin, rudder, or sail.
317. The system of claim 248, wherein at least part of the water capture structure wall has openings.
318. The system of claim 248, wherein at least part of the water capture structure wall has openings and the openings are configured to allow water flow substantially in only one direction.
319. The system of claim 248, wherein at least part of the water capture structure wall has openings and the openings are controllable.
320. The system of claim 248, wherein the at least one wall of the water capture structure comprises multiple wall segments.
321. The system of claim 248, wherein the at least one wall of the water capture structure comprises multiple wall segments, the multiple wall segments forming a closed shape.
322. The system of claim 248, wherein the at least one wall of the water capture structure comprises multiple wall segments, at least one of the multiple wall segments being curved.

323. The system of claim 248, wherein the at least one wall of the water capture structure comprises multiple wall segments and at least one of the multiple wall segments is movable or actuated.
324. The system of claim 248, wherein the system is anchored to at least one of the floor of the water body, or to a sea-anchor.
325. The system of claim 248, wherein the location of the system is movable.
326. The system of claim 248, wherein the system is movable and is movable using power derived from a turbine positioned in the conduit and being driven by the flow of water in at least a portion of the conduit.
327. The system of claim 248, wherein the conduit includes at least one opening that directs water out of the conduit in a direction other than downward.
328. The system of claim 248, wherein the conduit includes at least one opening that directs water out of the conduit in a direction other than downward, and the amount of flow through the opening is controllable.
329. The system of claim 248, wherein the conduit includes at least one opening that directs water out of the conduit in a direction other than downward, and the direction of the water flow is controllable.
330. The system of claim 248, wherein the conduit includes one or more openings located at preferred depths.
331. The system of claim 248, wherein the conduit comprises multiple openings distributed over an area to effect, at depth, rapid dilution of outflow water with ambient water.
332. The system of claim 248, wherein the system is movable by coupling the vessel to a propulsive vessel.
333. The system of claim 248, further comprising:

- a wind manipulating structure to harness wind power for moving the system.
334. The system of claim 248, further comprising:  
a wind manipulating structure to harness wind power for controlling the amount that the at least one wall of the water capture structure extends above the local water surface.
335. The system of claim 248, further comprising:  
a wind manipulating structure to harness wind power for controlling the amount that the at least one wall of the water capture structure extends above the local water surface and the control comprises a passive control.
336. The system of claim 248, further comprising:  
a wind manipulating structure to harness wind power for controlling the amount that the at least one wall of the water capture structure extends above the local water surface and the control comprises an active control.
337. The system of claim 248, wherein the system is used to influence coupling between water and one or more atmospheric constituents or properties.
338. The system of claim 248, further comprising:  
a communications system.
339. The system of claim 248, further comprising:  
a processor.
340. The system of claim 248, further comprising:  
at least one sensor.
341. The system of claim 248, further comprising:  
at least one sensor, the sensor being at least one of a location sensor, a flow sensor, a pressure sensor, a composition sensor, or a temperature sensor.

342. The system of claim 248, wherein the water comprises ocean water.
343. The system of claim 248, wherein the water comprises lake water.
344. The system of claim 248, wherein the water comprises reservoir water.
345. The system of claim 248, wherein the water comprises river water.
346. The system of claim 248, wherein the water capture structure and the conduit have substantially the same cross sectional area and shape.
347. The system of claim 248, wherein at least one of the cross sectional area or the shape of the conduit varies along the length of the conduit.
348. The system of claim 248, wherein the buoyancy of the water capture structure can be varied.
349. The system of claim 248, wherein the buoyancy of a wall of the water capture structure can be varied.
350. The system of claim 248, wherein at least a portion of at least one of the water capture structure or the conduit comprises a fabric.
351. The system of claim 248, wherein the properties being altered comprise at least one of, water temperature, dissolved-gas concentration, water chemical composition or water biological composition.
352. The system of claim 248, wherein the system is used to influence biological activity.
353. The system of claim 248, further comprising at least one second conduit adjacent the at least one conduit, wherein the at least second conduit carries water in the upward direction and is in thermal communication with the at least one conduit.
354. The system of claim 248, further comprising at least one second conduit adjacent the at least one conduit, wherein the at least second conduit carries water in the

- upward direction and is in thermal communication with the at least one conduit, such that the at least one conduit is external the at least one second conduit.
355. The system of claim 248, further comprising at least one second conduit adjacent the at least one conduit, wherein the at least second conduit carries water in the upward direction and is in thermal communication with the at least one conduit, such that the at least one second conduit is external the at least one conduit.
356. The system of claim 248, wherein the at least one conduit includes heat transfer structures.
357. The system of claim 248, wherein the at least one conduit includes heat transfer structures and the heat transfer structures include heat pipes.
358. The system of claim 248, wherein the at least one conduit includes heat transfer structures and the heat transfer structures include fins.
359. The system of claim 248, wherein a first conduit and a second conduit are separated by a wall.
360. The system of claim 248, wherein a first conduit and a second conduit are separated by a wall and the wall between the first conduit and the second conduit is configured to transfer thermal energy there through.
361. The system of claim 248, wherein a first conduit and a second conduit are separated by a wall and the wall varies in dimension along the length.
362. The system of claim 248, wherein heat transfer properties of the at least one conduit vary along its length.
363. The system of claim 248, wherein heat transfer properties of the at least one conduit are controllable.
364. The system of claim 248, wherein the system includes a plurality of first conduits providing downward flow and one or more second conduits providing upward

flow, the first conduit and the second conduit at least partially in thermal communication.

365. The system of claim 248, wherein at least one conduit extends to a different length than a second conduit.
366. The system of claim 248, wherein the system includes a sensing device to sense the flow rate through at least one conduit.
367. The system of claim 248, wherein the system includes more than one conduit and the conduits have different entrance or exit directions compared with other conduits.
368. The system of claim 248, wherein the system includes a sensing device to sense the flow rate through the at least one conduit and sensor output is recorded.
369. The system of claim 248, wherein the at least one conduits each include more than one inlet or outlet.
370. The system of claim 248, wherein the at least one conduits each include controllable inlets or outlets.
371. The system of claim 248, wherein the mechanically actuated control system includes moveable pleats coupled to the at least one conduit.
372. The system of claim 248, wherein the mechanically actuated control system includes moveable vanes coupled to the at least one conduit.
373. The system of claim 248, wherein the mechanically actuated control system includes one or more valves to control flow through any of the at least one conduit.
374. The system of claim 248, wherein the mechanically actuated control system includes heat pipes configured to be turned on or off.

375. The system of claim 248, wherein the mechanically actuated control system includes moveable structures configured to change the surface area of the at least one conduit wall.

FIG. 1

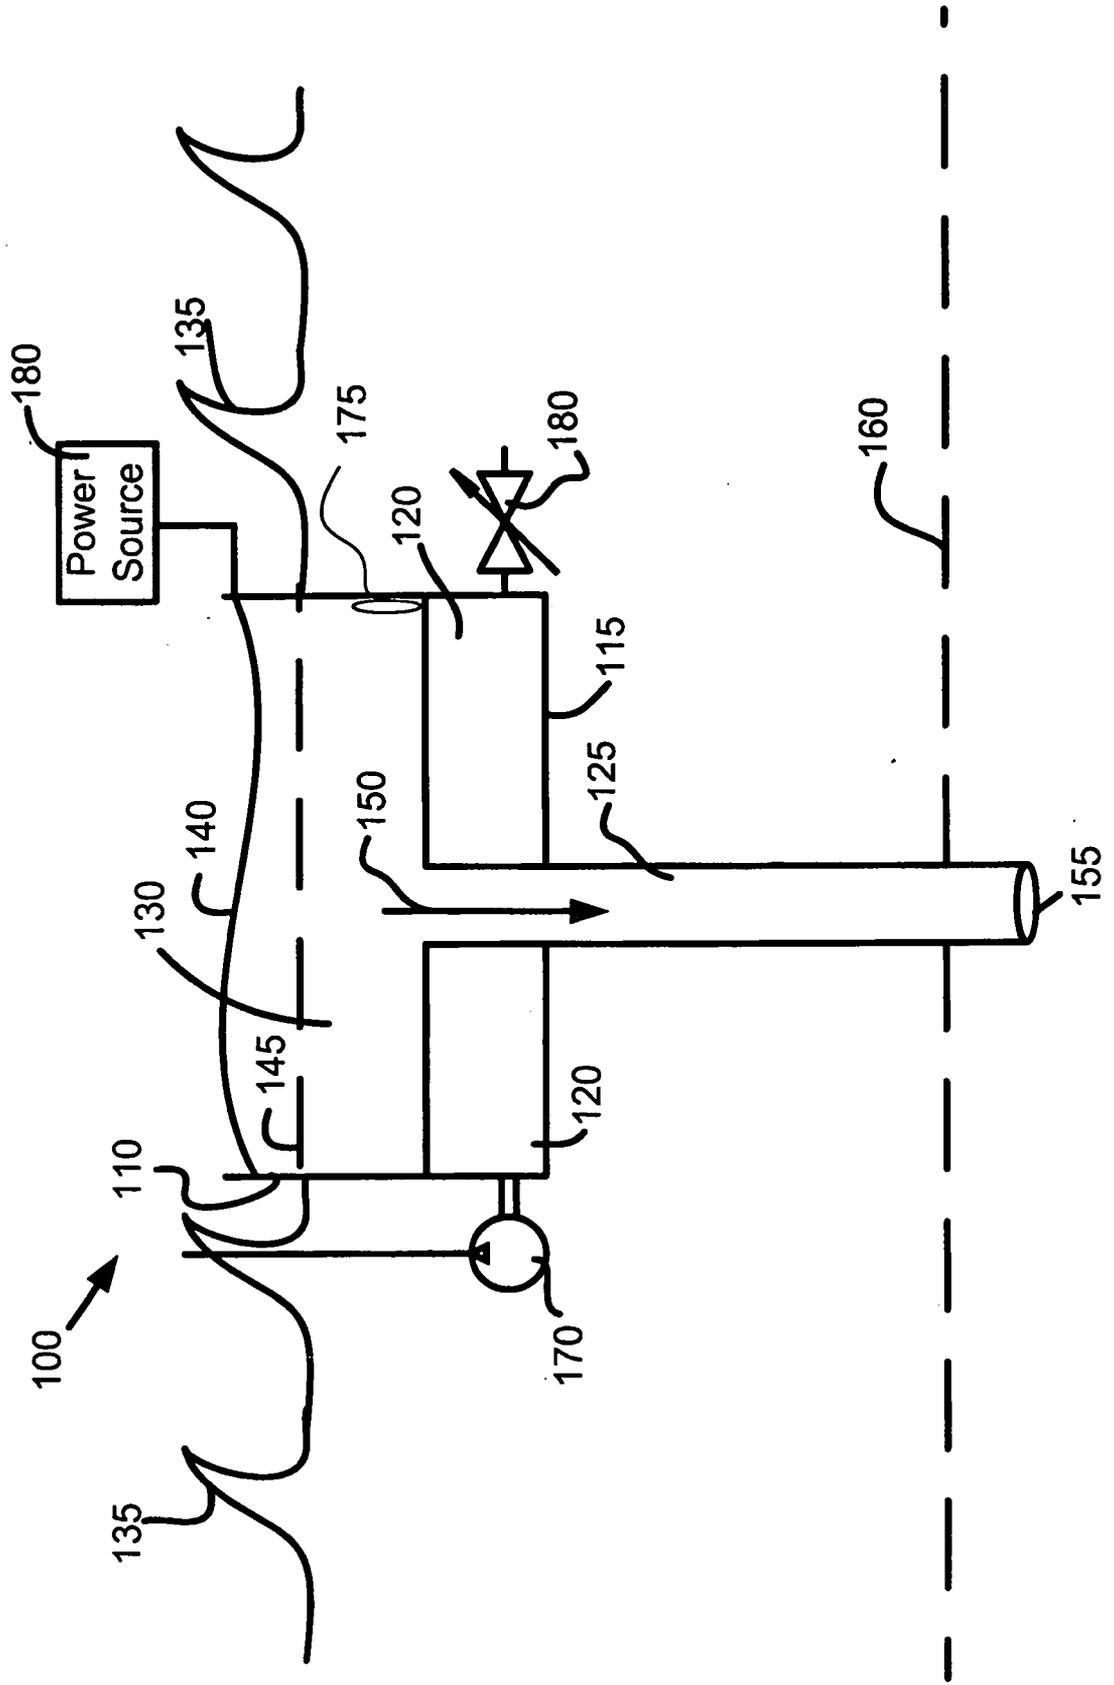


FIG. 2

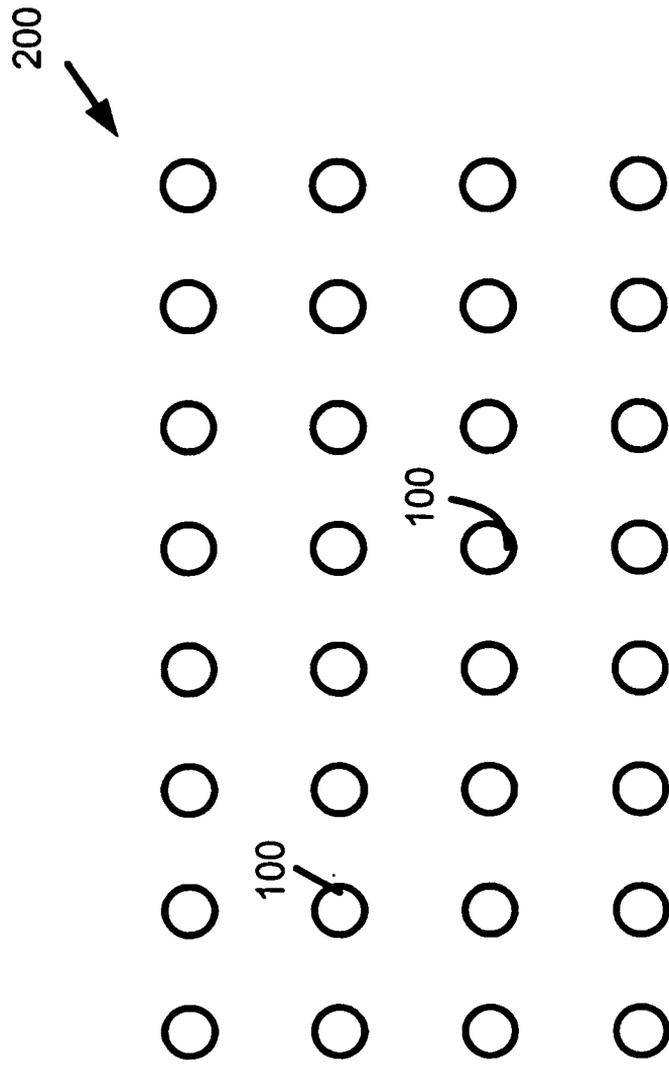


FIG. 3

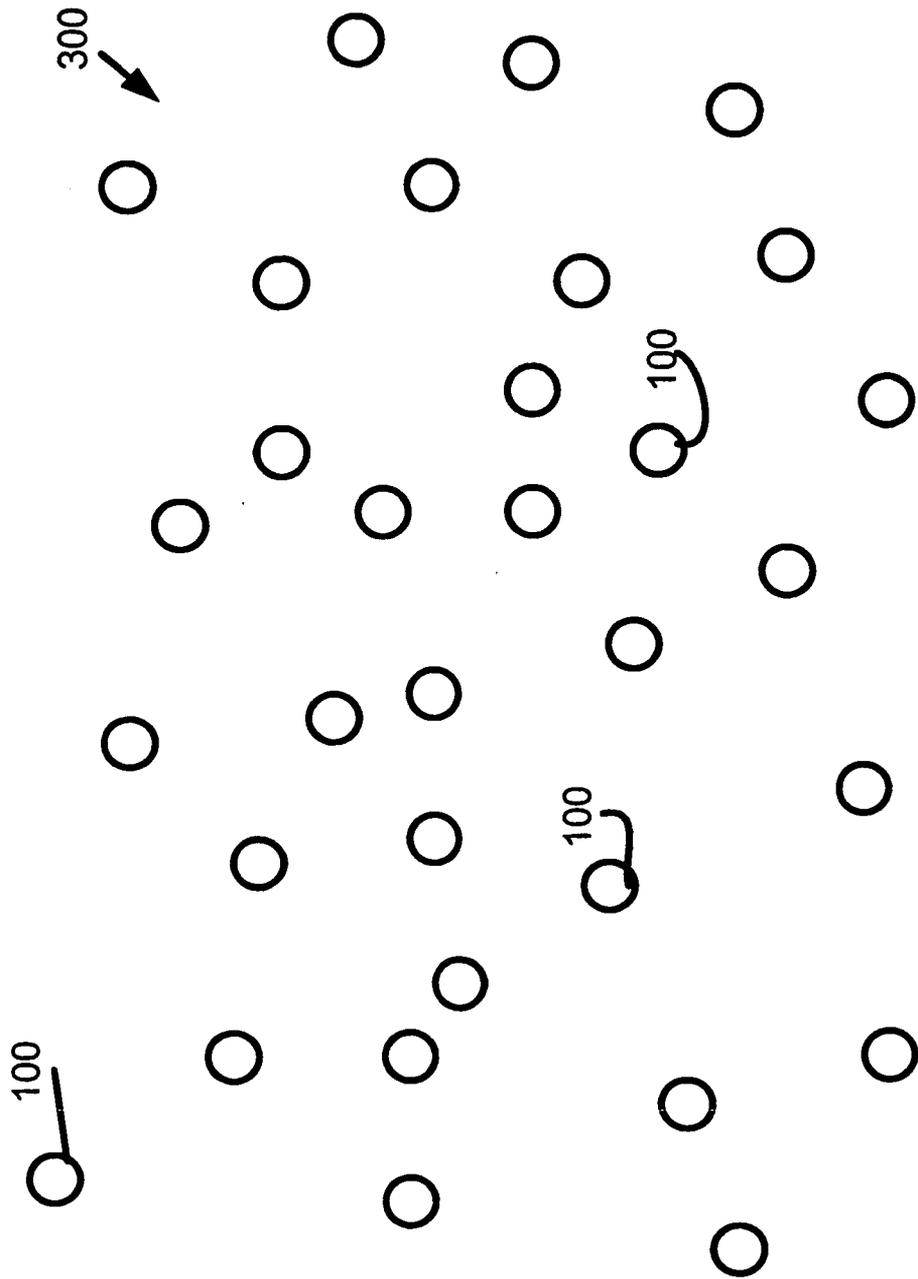


FIG. 4

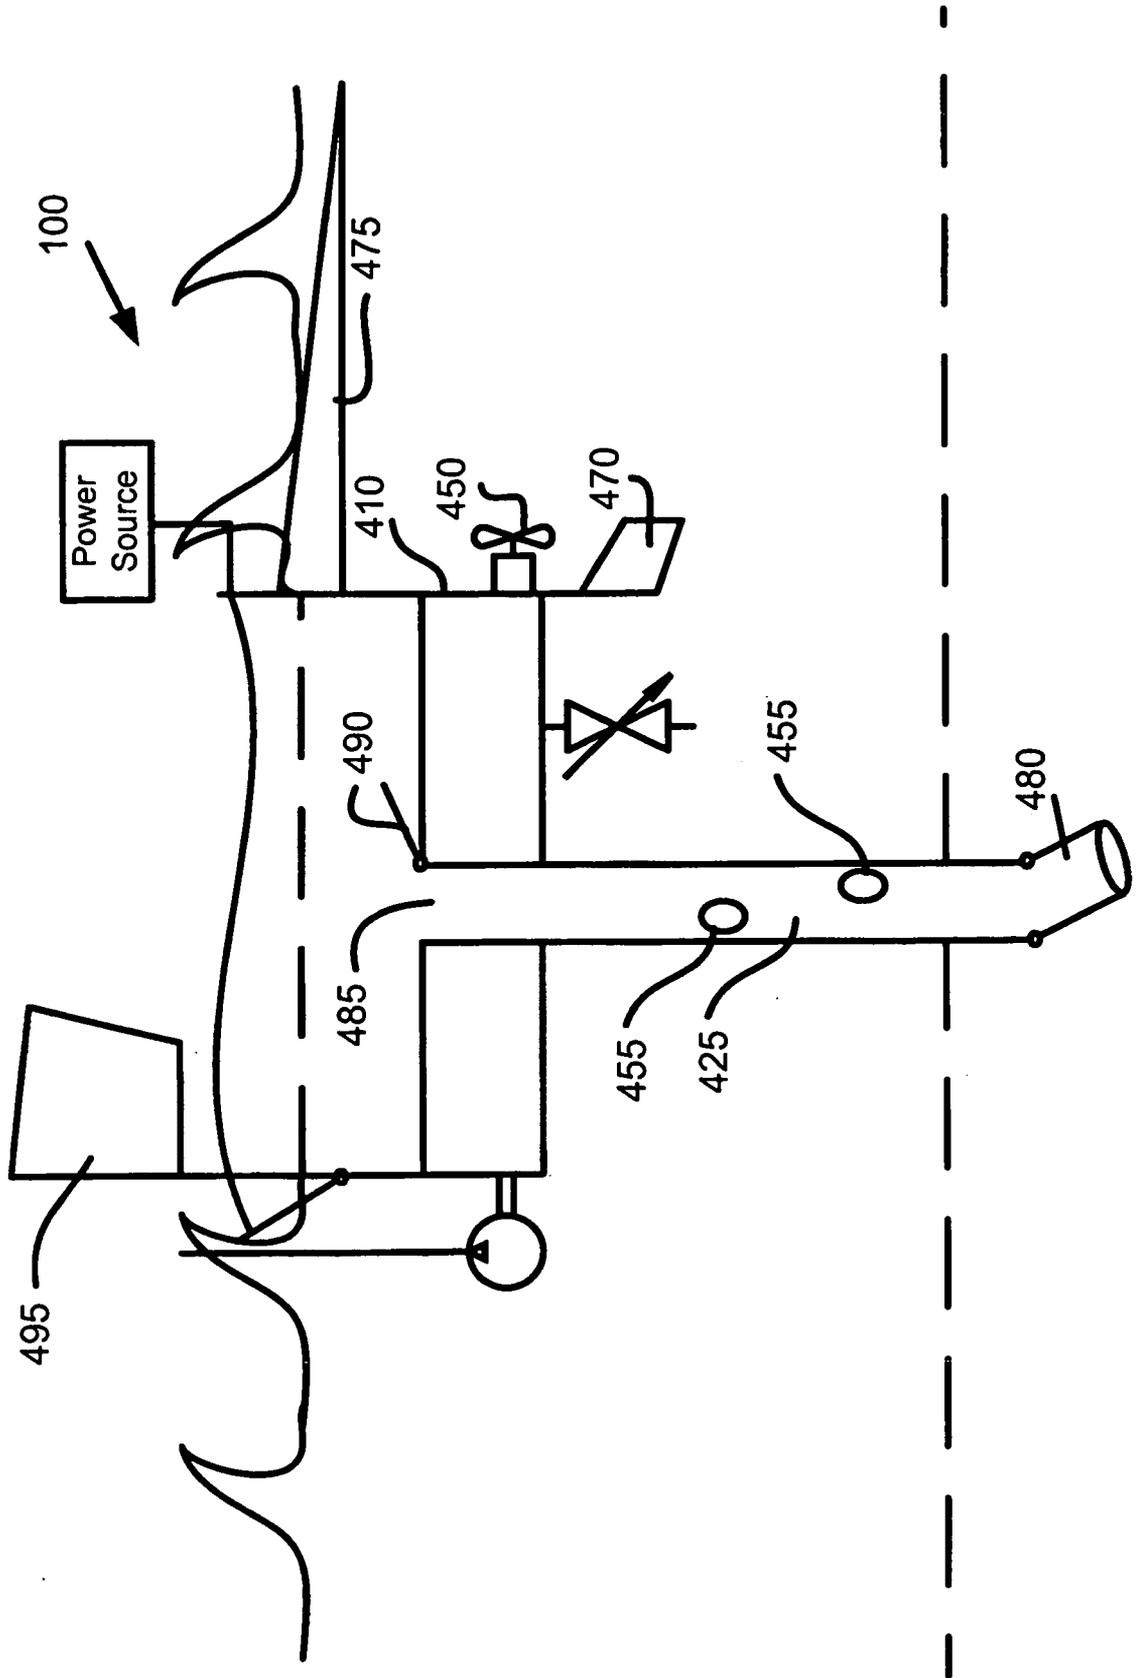


FIG. 5

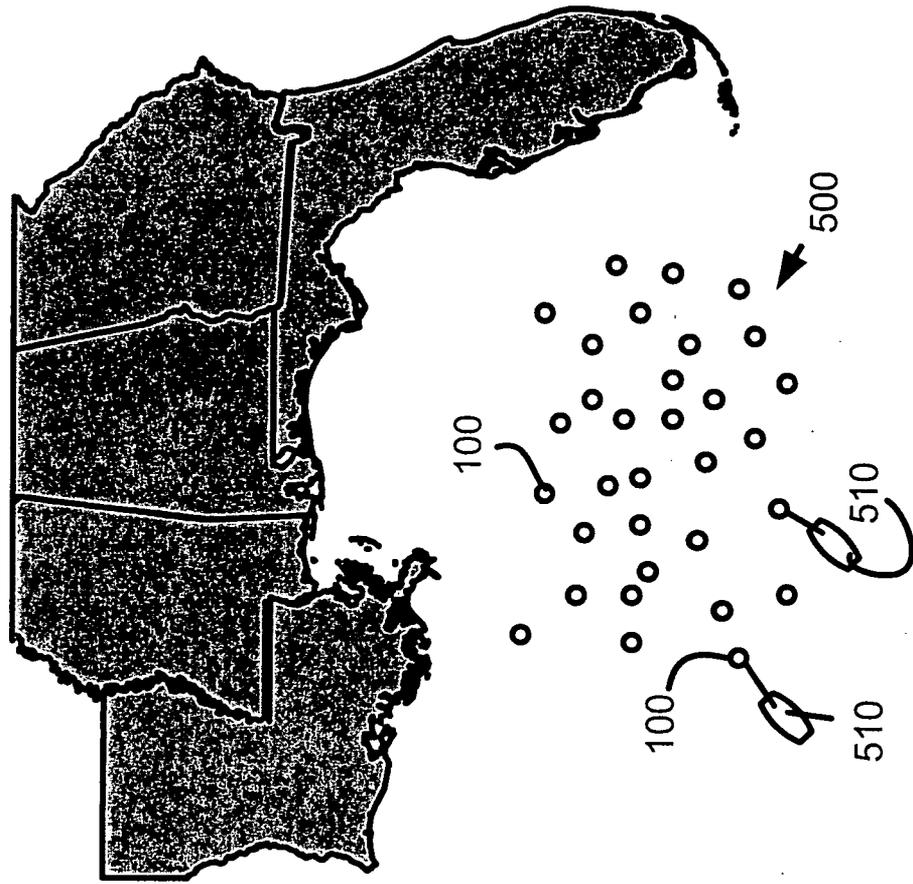


FIG. 6

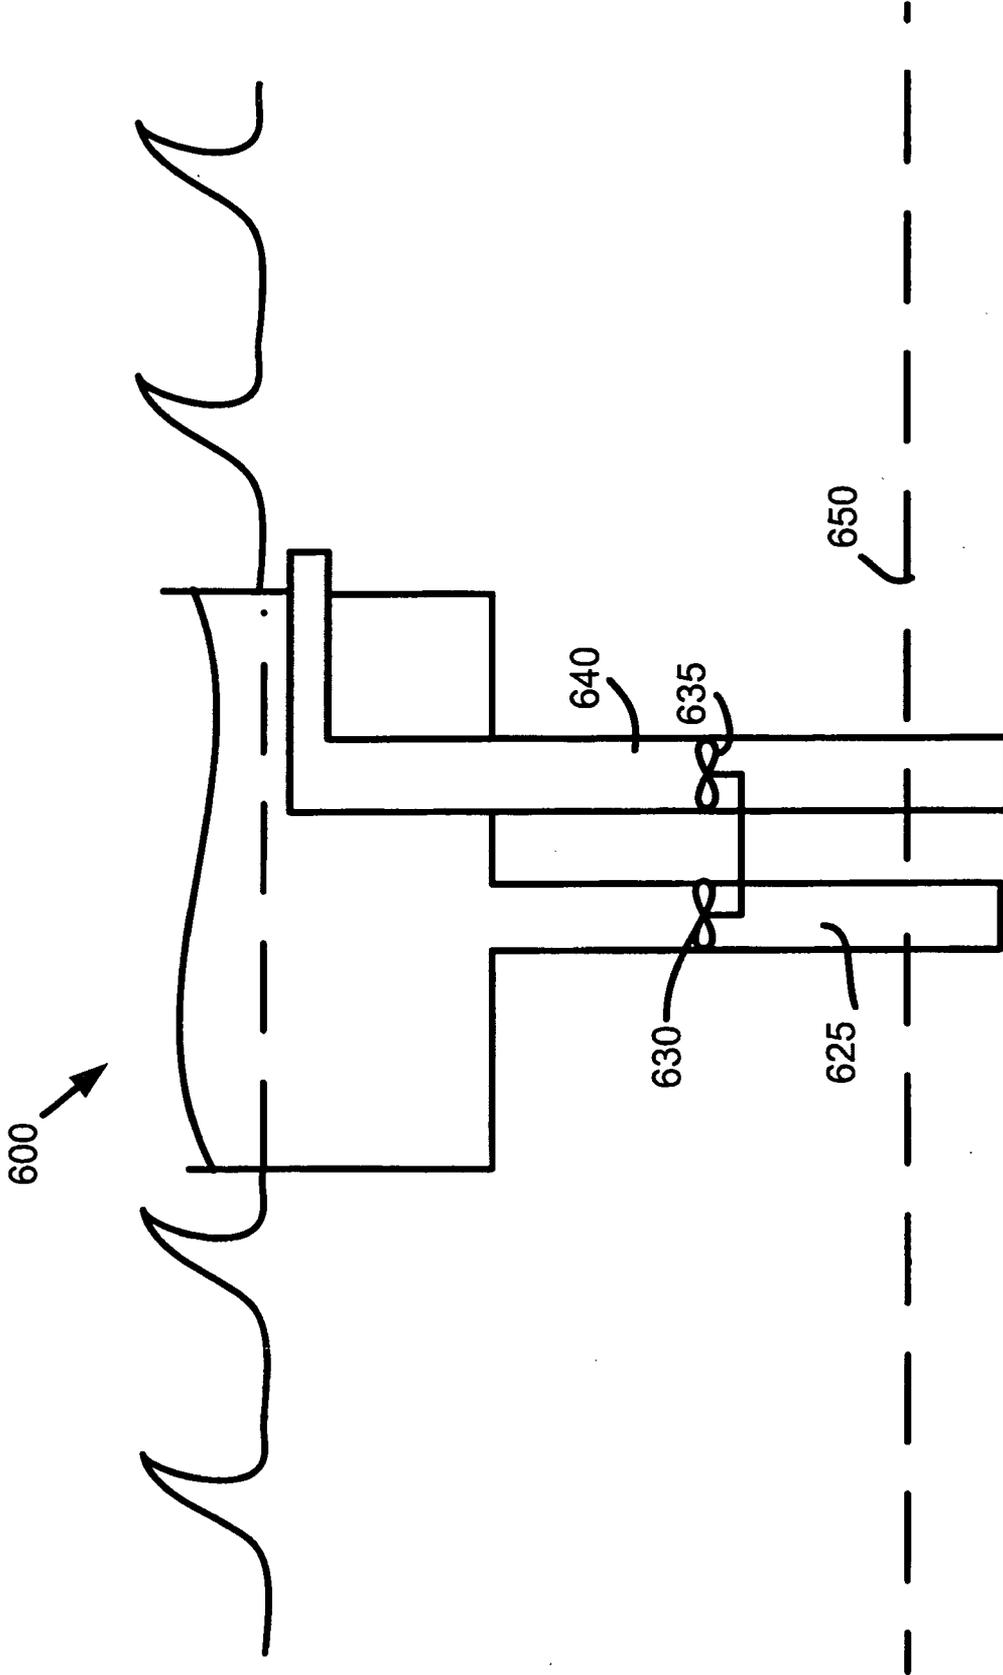
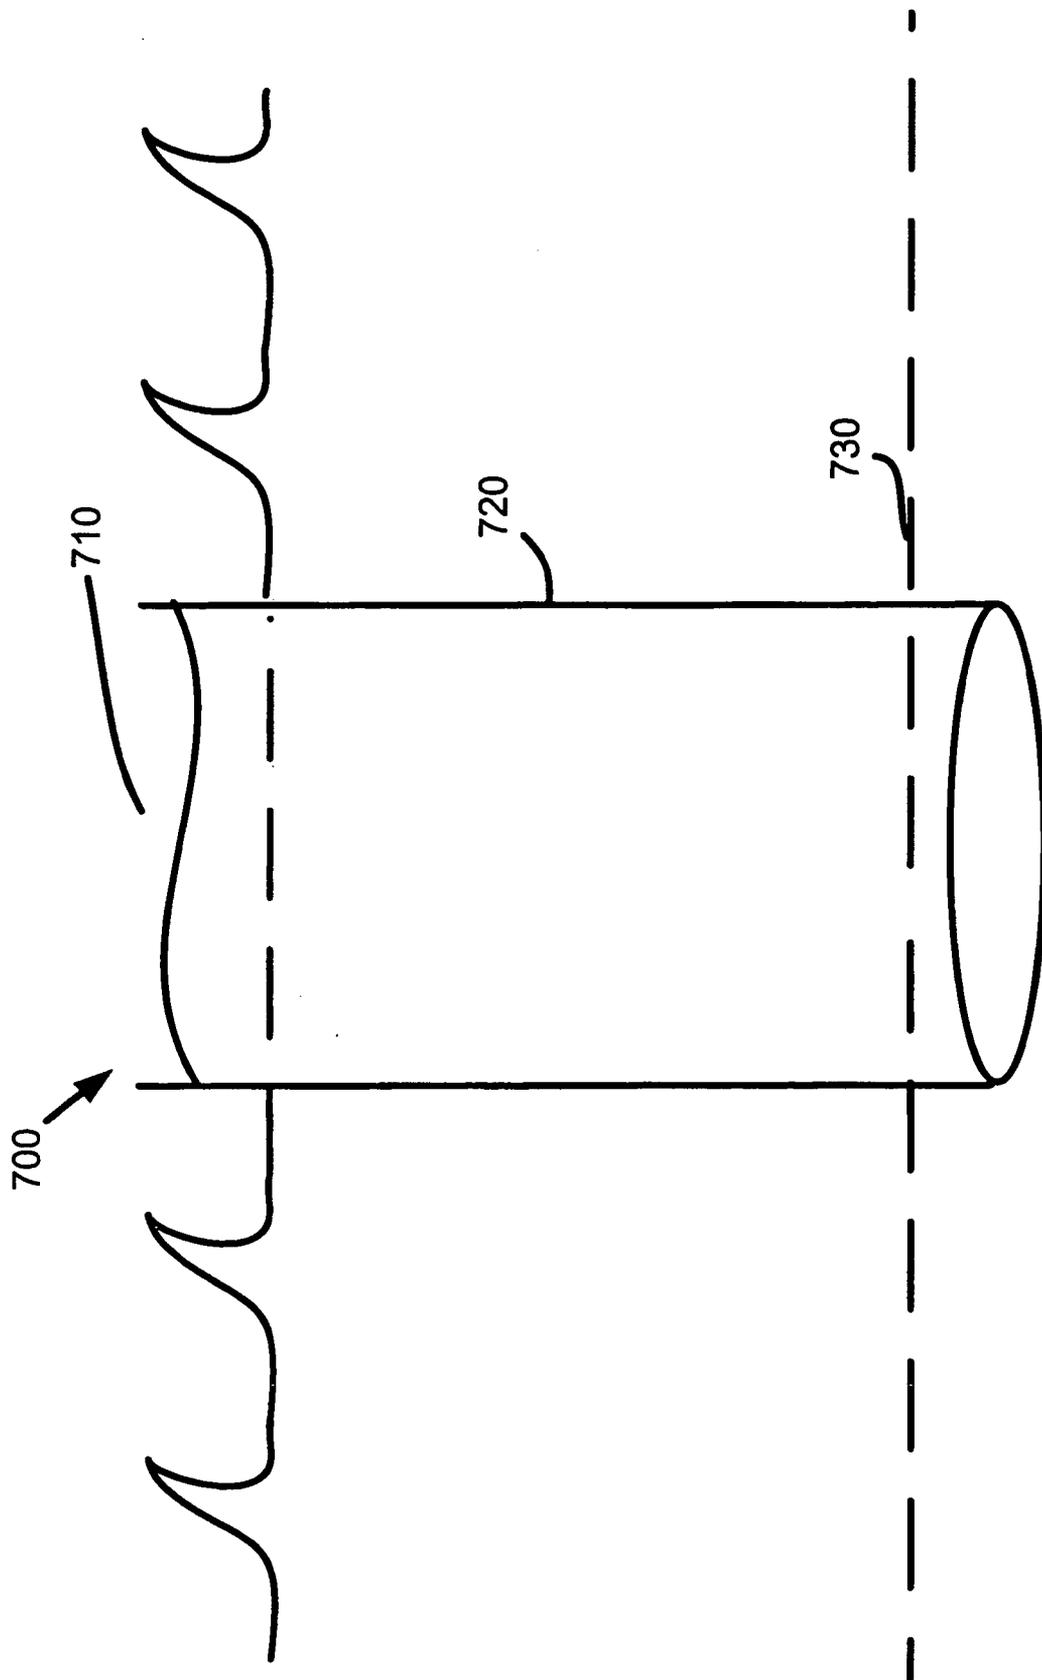


FIG. 7



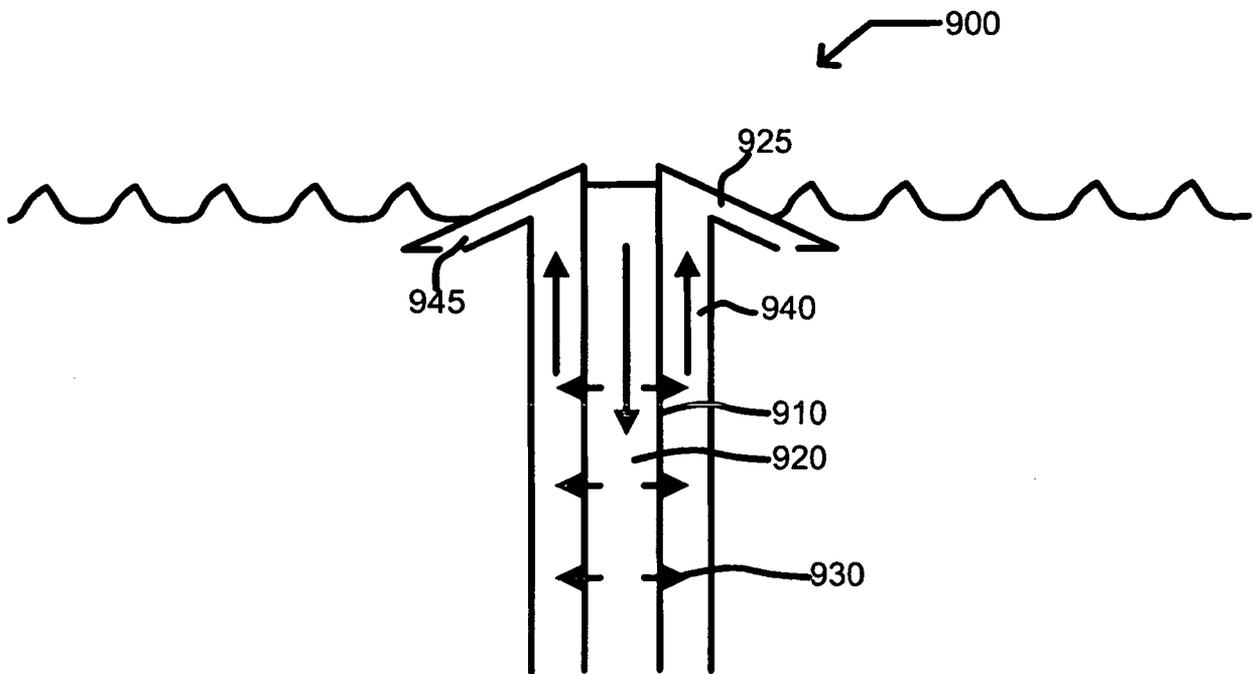
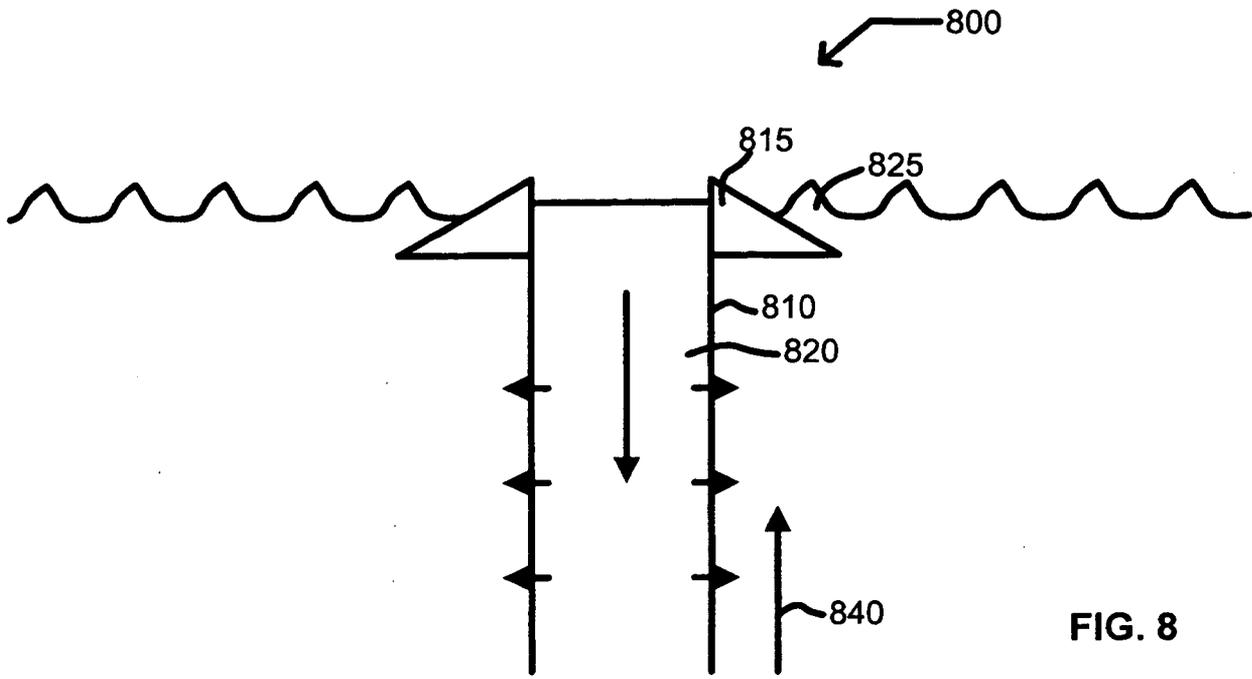
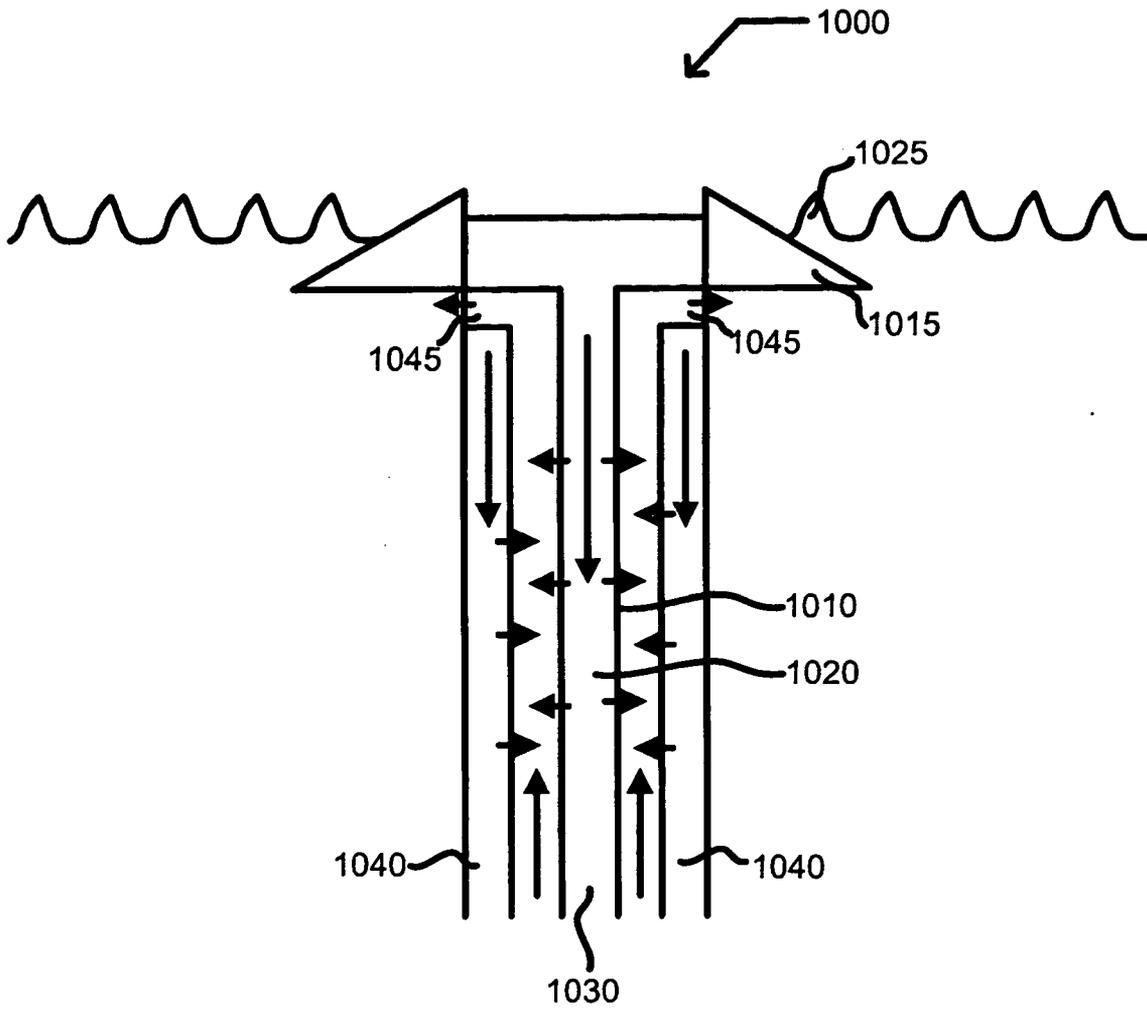


FIG. 10



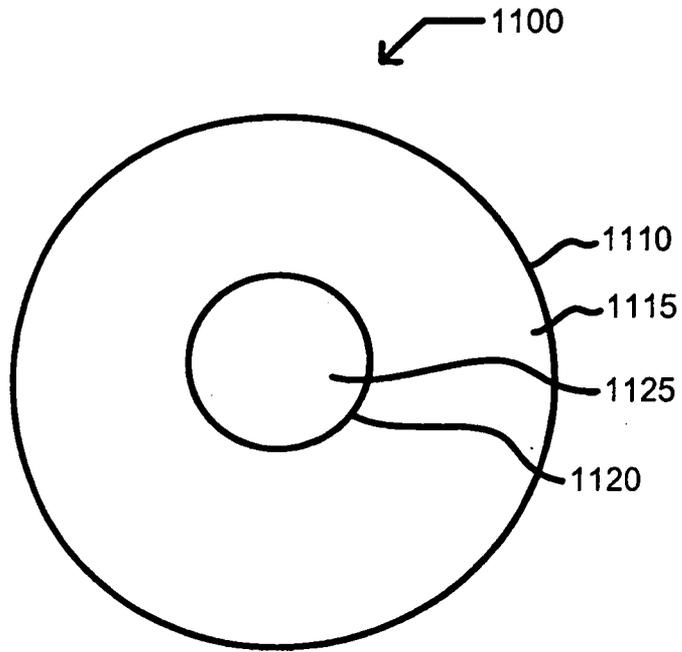


FIG. 11





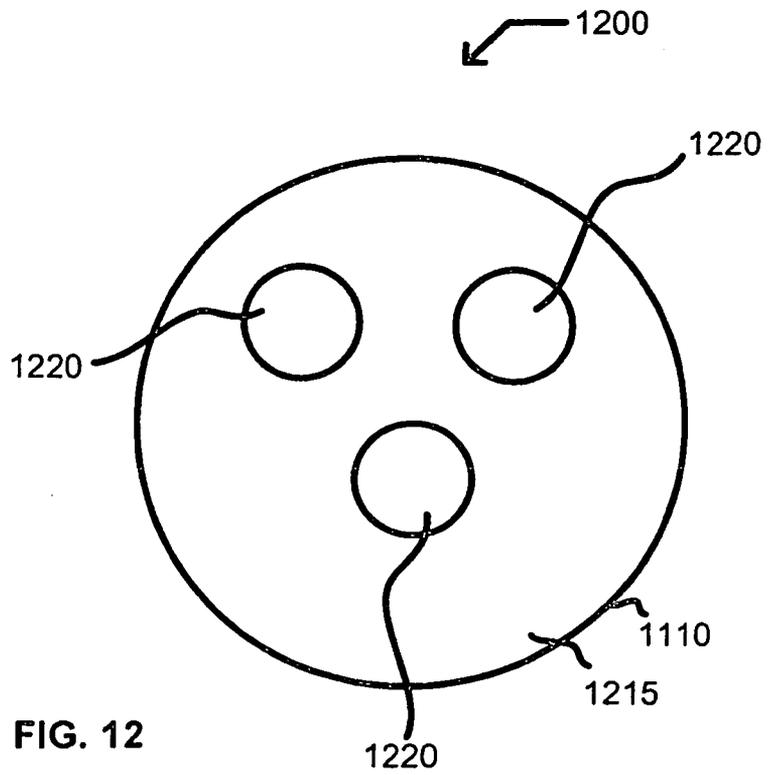


FIG. 12

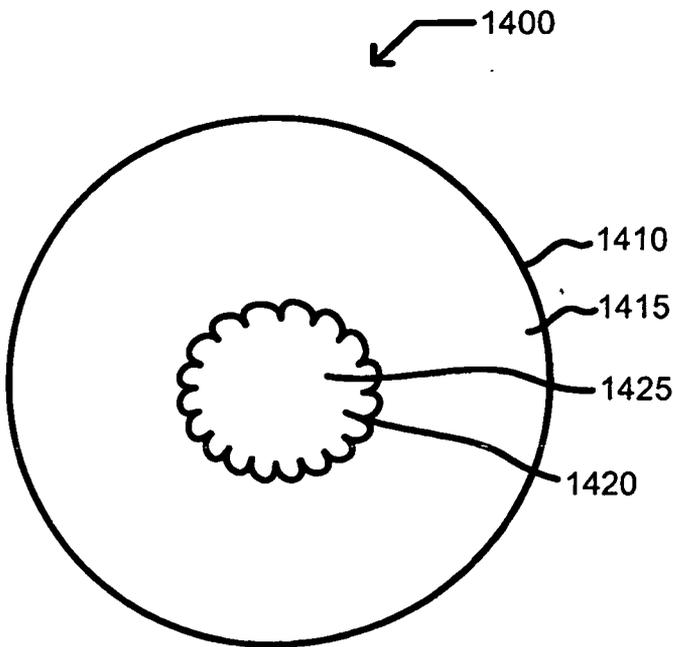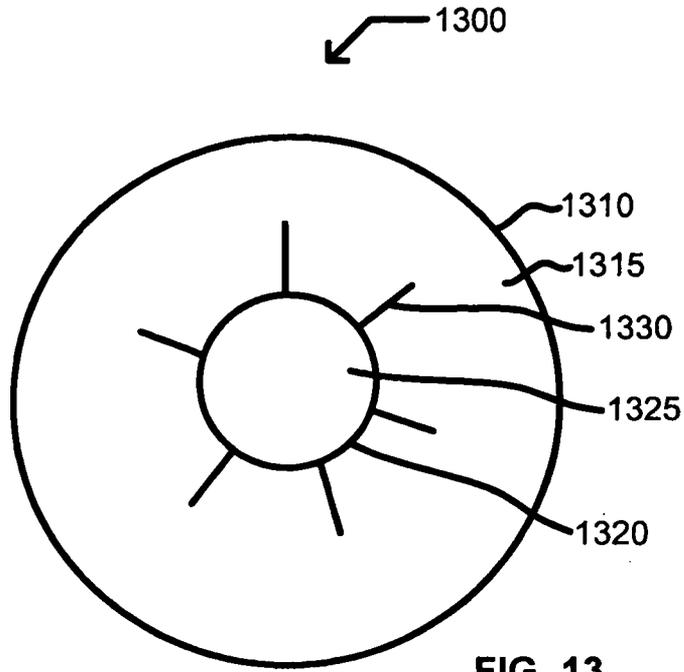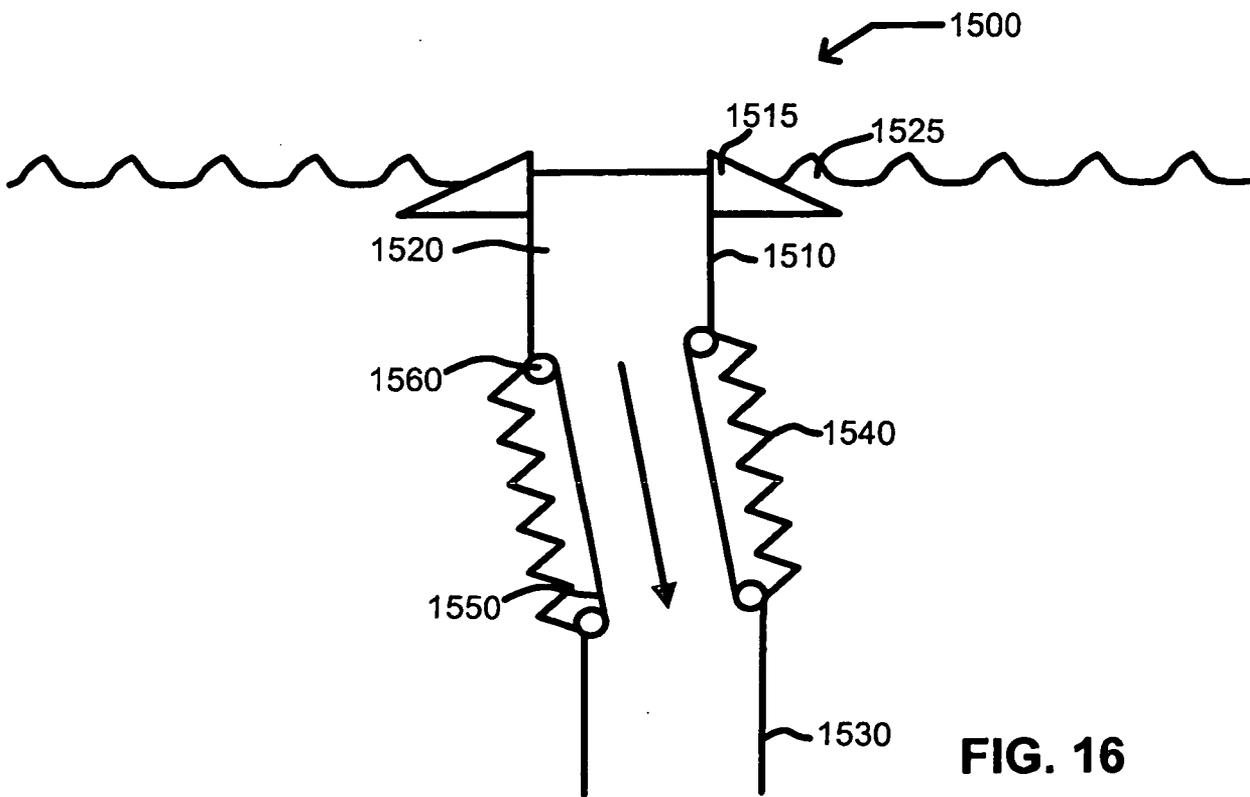

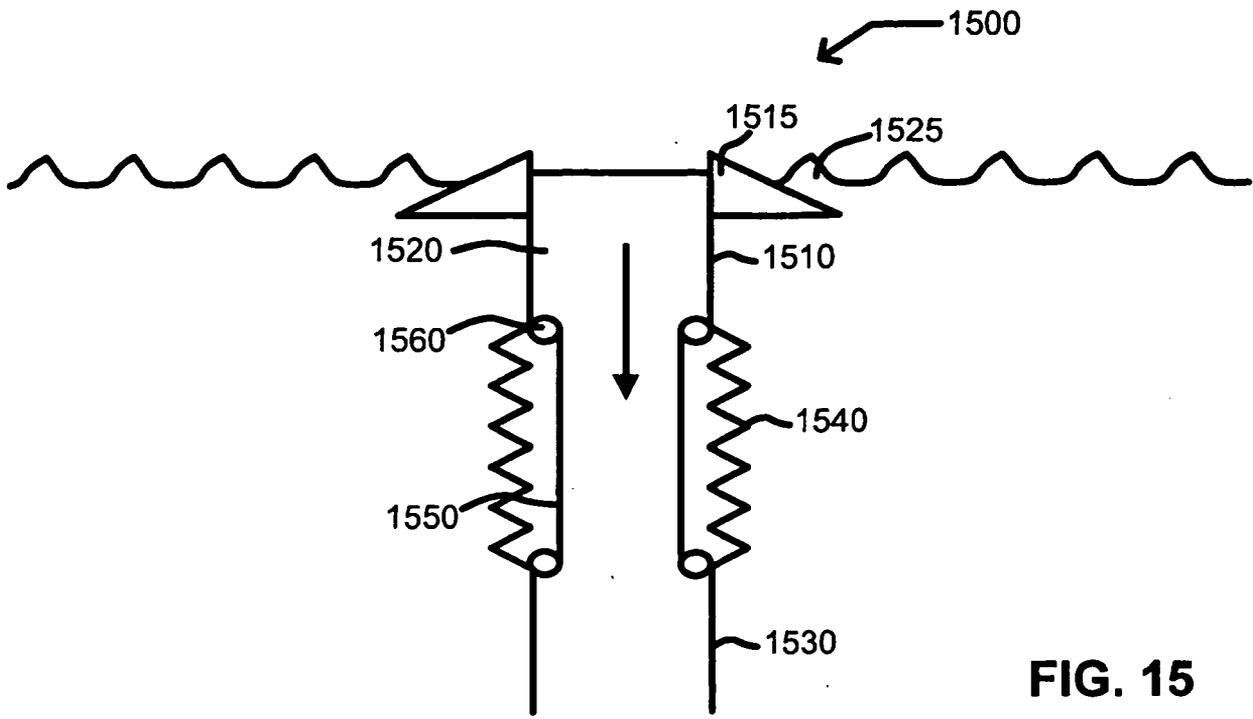

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2010/001562

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC(8) - E02B 1/00 (2010.01) USPC - 405/303 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC(8) - A61G 15/00, E02B 1/00 (2010.01) USPC - 114/264; 210/143; 405/303 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) MicroPatent, Google Patent		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 20020009338 A1 (BLUM et al) 24 January 2002 (24.01.2002) entire document	1-4, 7, 17-21, 24, 28, 30, 31, 34-36, 44-48, 68, 70, 71, 248
--		
Y		5, 6, 8-15, 16, 22, 23, 25-27, 29, 32-33, 37-43, 49-67, 69, 72, 73, 126
Y	US 7,520,237 B1 (DIMOV ZHEKOV) 21 April 2009 (21.04.2009) entire document	5, 50, 51, 53, 61, 62, 64-67
Y	US 2007/0084768 A1 (BARBER) 19 April 2007 (19.04.2007) entire document	6, 8, 25, 42, 49, 63
Y	US 4,152,895 A (WIRT) 08 May 1979 (08.05.1979) entire document	9-12, 14, 16, 23, 26, 27, 37-41, 43, 54-60, 69, 72, 73, 126
Y	WO 2008/069948 A1 (HYDE et al) 12 June 2008 (12.06.2008) entire document	13, 15, 29, 32, 33
Y	US 2006/0278154 A1 (TOWLEY, III et al) 14 December 2006 (14.12.2006) entire document	22, 52
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/>		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 13 August 2010		Date of mailing of the international search report <b>30 AUG 2010</b>
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201		Authorized officer: Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2010/001562

**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

- 1.  Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
- 2.  Claims Nos.: 74-125, 127-247, 249-375  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

Claims 74-125, 127-247, 249-375 were unsearchable due to lack of clarity. Please reference PCT/ISA/224 mailed 02 July 2010.

- 3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

- 1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
- 2.  As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
- 3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
- 4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

**Remark on Protest**

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.