

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 May 2012 (18.05.2012)

(10) International Publication Number
WO 2012/064367 A2

(51) International Patent Classification:

G01N 33/00 (2006.01) B01J 19/00 (2006.01)
G01N 1/22 (2006.01) C07C 31/02 (2006.01)

(21) International Application Number:

PCT/US2011/001884

(22) International Filing Date:

10 November 2011 (10.11.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/927,315 10 November 2010 (10.11.2010) US

(71) Applicant (for all designated States except US):
SEARETE LLC [US/US]; 11235 SE 6th Street, Suite 200, Bellevue, Washington 98004 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CALDEIRA, Kenneth G. [US/US]; 3 Ventana Court, Redwood City, California 94062 (US). HYDE, Roderick A. [US/US]; 9915 - 161st Avenue N.E., Redmond, Washington 98052 (US). ISHIKAWA, Muriel Y. [US/US]; 1185 Hillcrest Avenue, Livermore, California 94550-4921 (US). KARE, Jordin T. [US/US]; 908 15th Ave. East, Seattle, Wash-

ington 98112 (US). LATHAM, John [GB/US]; 601 East Street, Boulder, Colorado 80302-9771 (US). MYHRVOLD, Nathan P. [US/US]; 11235 SE 6th Street, Suite 200, Bellevue, WA 98004 (US). SALTER, Stephen H. [GB/GB]; 27 Blackford Road, Edinburgh EH9 2DT (GB). TEGREENE, Clarence T. [US/US]; 10629 NE 17th Street, Bellevue, WA 98004-2834 (US). TUCKERMAN, David B. [US/US]; 3 Wellesley Ct., Lafayette, CA 94549 (US). WEAVER, Thomas Allan [US/US]; 101 Arroyo Court No. 8, San Mateo, CA 94402 (US). WHITMER, Charles [US/US]; 15509 Uplands Way S.E., North Bend, WA 98045 (US). WOOD, JR., Lowell L. [US/US]; 989 112th Avenue NE #2310, Bellevue, WA 98004 (US). WOOD, Victoria Y.H. [US/US]; 1185 Hillcrest Avenue, Livermore, CA 94550-4921 (US).

(74) Agents: CHAN, Alistair K. et al.; 11235 SE 6th Street, Suite 200, Bellevue, WA 98004 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,

[Continued on next page]

(54) Title: TREATMENT OF RUMINANT EXHALATIONS

(57) Abstract: Methane gas in a ruminant exhalation may be oxidized to reduce the amount of methane gas output by the ruminant.

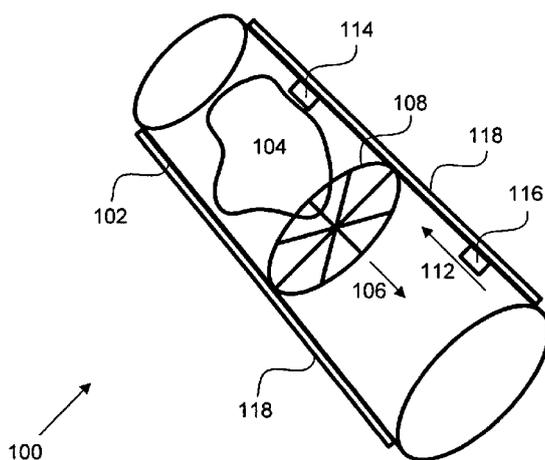


FIG. 1



WO 2012/064367 A2



NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

Treatment of Ruminant Exhalations

Inventor(s): Kenneth G. Caldeira, Roderick A. Hyde,
Muriel Y. Ishikawa, Jordin T. Kare, John Latham, Nathan
P. Myhrvold, Stephen H. Salter, Clarence T. Tegreene,
5 David B. Tuckerman, Thomas Allan Weaver, Charles
Whitmer, Lowell L. Wood, Jr., Victoria Y.H. Wood

SUMMARY

The foregoing summary is illustrative only and is not intended to be in any way limiting. In addition to the illustrative aspects, embodiments, and features
10 described above, further aspects, embodiments, and features will become apparent by reference to the drawings and the following detailed description.

In one embodiment, an apparatus comprises a device suitable for retention in a nasal passage of a ruminant, the device being arranged to pass a ruminant exhalation, the device including a first structure configured to oxidize methane gas in the
15 ruminant exhalation, the device being further arranged to pass products of the oxidized methane gas toward a nasal passage exit.

In one embodiment, a method comprises receiving a ruminant exhalation in a first region of the nasal passage of a ruminant, and oxidizing methane gas in the ruminant exhalation at least partially within the first region of the nasal passage of the
20 ruminant.

In one embodiment, a method comprises: receiving a first input signal corresponding to a first measurement of a ruminant exhalation, the first measurement corresponding to an un-oxidized portion of the ruminant exhalation; receiving a second input signal corresponding to a second measurement of a ruminant exhalation,
25 the second measurement corresponding to an oxidized portion of the ruminant exhalation; and producing a first output signal based on a difference between the first input signal and the second input signal.

In one embodiment, a method comprises: receiving a first input signal corresponding to a difference between a first measurement of a ruminant exhalation obtained prior to oxidation of the exhalation and a second measurement of a ruminant exhalation obtained after oxidation of the exhalation; and producing a first output
5 signal based on the received first input signal and corresponding to an amount of methane oxidized in the oxidation of the exhalation.

In one embodiment, a method comprises: receiving a first input signal corresponding to a first measurement of a ruminant exhalation obtained after oxidation, within a nasal passage of the ruminant, of the exhalation; and producing a
10 first output signal based on the received first input signal and corresponding to an amount of methane oxidized in the oxidation of the exhalation.

In one embodiment, a method comprises detecting a post-oxidation level of methane exiting a ruminant; and responsive to the detecting, producing an indicator of the post-oxidation level.

15 In one embodiment, an apparatus comprises: circuitry configured to receive a first input signal corresponding to a first measurement of a ruminant exhalation, the first measurement corresponding to an un-oxidized portion of the ruminant exhalation; circuitry configured to receive a second input signal corresponding to a second measurement of a ruminant exhalation, the second measurement
20 corresponding to an oxidized portion of the ruminant exhalation; and circuitry configured to produce a first output signal based on a difference between the first input signal and the second input signal.

In one embodiment, an apparatus comprises: circuitry configured to receive a first input signal corresponding to a difference between a first measurement of a
25 ruminant exhalation obtained prior to oxidation of the exhalation and a second measurement of a ruminant exhalation obtained after oxidation of the exhalation; and circuitry configured to produce a first output signal based on a the received first input signal and corresponding to an amount of methane oxidized in the oxidation of the exhalation.

30 In one embodiment, an apparatus comprises: circuitry configured to receive a first input signal corresponding to a first measurement of a ruminant exhalation

obtained after oxidation, within a nasal passage of the ruminant, of the exhalation; and circuitry configured to produce a first output signal based on the received first input signal and corresponding to an amount of methane oxidized in the oxidation of the exhalation.

5 In one embodiment, an apparatus comprises a device attachable to the nasal septum of a ruminant and a first structure supported by the device and arranged to oxidize methane gas in an exhalation of the ruminant.

BRIEF DESCRIPTION OF THE FIGURES

10 **FIGURE 1** shows a device suitable for insertion into the nasal passage of a ruminant.

FIGURE 2 shows the device of Figure 1 and a cow.

FIGURE 3 shows a substrate, a washcoat support, and a catalyst.

15 **FIGURE 4** shows a device suitable for insertion into the nasal passage of a ruminant with other elements of an apparatus.

FIGURES 5-9 are each flow charts illustrative of a method.

DETAILED DESCRIPTION

In the following detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative
20 embodiments described in the detailed description, drawings, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented here.

25 Catalytic converters are used to reduce pollution from vehicle emissions. A configuration similar to that of a catalytic converter for a vehicle may be used to reduce emissions of certain gasses such as methane (CH₄) from an animal.

Figure 1 shows an embodiment of an apparatus 100 comprising a device 102 suitable for retention in or attachable to a nasal passage of a ruminant, the device 102 being arranged to pass a ruminant exhalation 104, the device 102 including a first

structure 108 configured to oxidize methane gas in the ruminant exhalation 104, the device 102 being further arranged to pass products of the oxidized methane gas toward a nasal passage exit in a direction 106. The ruminant may be a cow, a sheep, a goat, or a different animal.

5 As the ruminant exhalation 104 travels through the device 102 in the direction 106, the first structure 108 may be configured to oxidize methane gas in the ruminant exhalation 104. The device 102 may be configured such that when the animal is inhaling and gasses are flowing in the direction 112, the animal may breathe normally.

10 The first structure 108 is shown in Figure 1 as having substantially 2D radial symmetry. However, the composition of the first structure 108 may be selected to maximize the exposure of the ruminant exhalation 104 to the surface area of the first structure 108. For example, the first structure 108 may include a substantially 3D honeycomb structure, wherein the cell size of the honeycomb may be selected to
15 maximize the surface area of the first structure 108, while still allowing passage of the ruminant exhalation 104. Or, the first structure 108 may include a substantially spiral coil. While a honeycomb and spiral coil are given as two examples of the composition of the first structure 108, the first structure may take a variety of forms, including a rectilinear geometry, a substantially random geometry, or a different
20 geometry selected according to the application.

 The first structure 108 may be formed from a variety of materials. For example, in some embodiments the first structure may be formed from a catalyst selected to oxidize methane gas, including but not limited to a noble metal (such as palladium, platinum, gold, and/or a different noble metal), a rare earth element, a
25 metal oxide, a transition metal, and/or a different catalyst or material. In some embodiments, the first structure may be formed from a substrate such as a ceramic and/or a metal and may be coated with a material selected to oxidize methane gas. In an embodiment, which will be described in greater detail with respect to Figure 3, the first structure 108 may include a first substrate, a first washcoat support, and a first
30 catalyst carried by the washcoat support.

In some embodiments the first structure 108 may be heated, wherein the first structure 108 may oxidize methane gas with greater efficiency in a selected temperature range, which will be described in greater detail with respect to Figure 4.

The apparatus may further comprise a first detector 114 supported by the device 102 and arranged to detect a substance such as methane, a methane oxidation product (such as carbon monoxide, carbon dioxide, water, or a different product), or a different substance proximate to a first location on the device 102. For example, the detector 114 may be configured to detect an amount of the substance in a region, a threshold level of the substance, or it may detect the substance in a different way. The first location may be selected such that the detector 114 is arranged to detect a substance in an un-oxidized portion of the ruminant exhalation. For example, it may simply detect in a region that is upstream (specifically, upstream during exhalation) from the first structure 108 or otherwise detect the substance in the ruminant exhalation 104 prior to oxidation of the exhalation.

The first location may be selected such that the first detector 114 is arranged to detect a substance in a portion of the ruminant exhalation that bypasses the first structure 108. For example, Figure 1 shows the first structure 108 as having a cross-section that substantially spans the width of the device 102. However, in some embodiments the first structure 108 may occupy only a fraction of the width of the device, such that a portion of the ruminant exhalation 104 may pass through the device 102 without being oxidized. In this case, a first detector 114 may be arranged to detect the amount of a substance in the portion of the ruminant exhalation 104 that bypasses the first structure 108. Another way this may occur is in an embodiment where the device 102 includes more than one channel, where in this embodiment one or more channels may be configured without a first structure 108 such that the portion of the ruminant exhalation that passes through these channels remains un-oxidized, and a detector such as the first detector 114 may be placed in one or more channels not having a first structure 108, in order to detect a substance in the un-oxidized portion of the ruminant exhalation. In some embodiments the device 102 may include at least two different channels having one-way valves such that one channel is configured to pass the ruminant exhalation in the direction 106 and one channel is

configured to pass ambient air in the direction 112; in such an embodiment the first structure 108 could be situated such that ambient air passing in the direction 112 would not pass through and be heated by the first structure 108. In such an embodiment the valves could be actively controlled dependent on a detected level of methane and/or methane oxidation product.

The apparatus may further comprise a second detector 116 supported by the device 102 and arranged to detect a substance such as methane, a methane oxidation product (such as carbon monoxide, carbon dioxide, water, or a different product), or a different substance proximate to a second location on the device 102, the second location being different from the first location. Similarly to the first detector 114, a detector 116 may be configured to detect an amount of the substance in a region, a threshold level of the substance, or it may detect the substance in a different way. The first and second detectors 114, 116 may be configured to detect the same substance, different substances, or in some embodiments they may each be configured to detect a multitude of substances, in which case the substances they are configured to detect may be the same, different, or partially overlapping.

The first and second detectors 114, 116 may be any kind of detector configured to detect a gas. For example, they may include one or more spectroscopic detectors (which may include, for example, a laser or other source of electromagnetic energy), one or more detectors including a carbon nanotube (as described in, "CARBON NANOTUBES AS ACTIVE COMPONENTS FOR GAS DETECTORS", Wei-De Zhang et al., Journal of Sensors, Volume 2009, Article 160698, which is incorporated herein by reference), and/or a different kind of detector.

In some embodiments, the first structure 108 may have an on state and an off state. For example, the first structure 108 may oxidize methane gas optimally in a first temperature range ΔT_1 and the first structure 108 may be considered to be in an on state while it is within the first temperature range ΔT_1 . Similarly, the first structure 108 may provide little or no oxidation of methane gas in a second temperature range ΔT_2 , and the first structure 108 may be considered to be in an off state while it is within the second temperature range ΔT_2 . Thus, the first and second

detectors 114, 116 may be configured such that one detects an amount of substance in the ruminant exhalation 104 when the first structure 108 is in the on state, and the other detects an amount of substance in the ruminant exhalation 104 when the first structure 108 is in an off state. Further, there may be more than two detectors, and the detectors may be configured in such a way as to provide the desired measurements according to a particular embodiment.

The detectors 114, 116 may be positioned such that the first detector 114 is upstream (specifically, upstream during exhalation) from the first structure 108 and the second detector 116 is downstream (specifically, downstream during exhalation) from the first structure 108, as is shown in Figure 1. However, other configurations of detectors may be desirable based on a particular embodiment.

The apparatus 100 may further comprise an insulator 118 arranged to thermally insulate at least a portion of the device 102 from the nasal passage of the ruminant. Although the insulator 118 is shown as being integral to the device 102 in Figure 1, in some embodiments it may be completely or partially separate. For example, the insulator 118 may in some embodiments be a separate element that may fit in the nasal passage of the ruminant, wherein the device 102 may be configured to fit inside the insulator 118. In another embodiment, the insulator may comprise two separate pieces, such as a first piece that fits in the nasal passage of the ruminant, and a second piece that lines the outside of the device 102, wherein the device 102 may be configured to fit inside the first piece of the insulator. There are many ways in which the insulator may be configured relative to the device 102, and one skilled in the art may adapt the design according to a particular embodiment.

The apparatus 100 may further include one or more springs or other mechanical devices configured to hold the apparatus 100 in place in the nasal passage of the ruminant. In some embodiments the size of the apparatus 100 may be selected such that no such springs or other mechanical devices are necessary for holding the apparatus 100 in place. In some embodiments the apparatus 100 may be at least partially enveloped in a material configured to expand responsive to moisture to hold the apparatus 100 in place.

The device 102 is shown relative to a ruminant 202 in Figure 2, where in this embodiment the ruminant is a cow. Although only one device 102 is shown, in some embodiments a device 102 may be fitted to each of the animal's nostrils.

Although the device 102 is shown in Figure 2 as being configured to fit inside
5 the nasal passage of the ruminant, in other embodiments the device 102 may be configured in a different way. For example, in some embodiments the device 102 may be attachable to the nasal septum of a ruminant, similar to the nose ring of a cow. In such an embodiment, the device 102 may be configured similarly to the embodiment shown in Figure 1. In other embodiments, a device may be attachable to
10 the nasal septum of a ruminant and be configured to ignite in the presence of methane gas.

In one embodiment the first structure 108 configured to oxidize methane gas includes a first substrate 302, a first washcoat support 304 in intimate contact with the first substrate 302, and a first catalyst 306 (such as a noble metal) carried by the first
15 washcoat support 304. The substrate 302 may include, for example, a ceramic, a metal, and/or a different material. The first washcoat support 304 may include alumina, silica, and/or a different material. The first catalyst 306 may include palladium (Pd), platinum (Pt), gold (Au), rhodium (Rh), iridium (Ir), combinations thereof, and/or a different material. In some embodiments the first substrate 302 may
20 form a substantially honeycomb structure, wherein the honeycomb structure may have, for example, a density between 10-100 cells/cm, however the first substrate 302 may form a variety of different configurations. Different configurations of the first structure 108 (where the configuration of the substrate 302 may be substantially equivalent to the configuration of the first structure 108) have been described with
25 respect to Figure 1. Examples of the type of configuration of Figure 3 are described in U.S. Patent Application No. 2004/0192546 to Dang et al., entitled CATALYST FOR THE LOW TEMPERATURE OXIDATION OF METHANE, which is incorporated herein by reference, and in U.S. Patent No. 5,741,467 to Burton et al.,
entitled PALLADIUM CATALYST WASHCOAT SUPPORTS FOR IMPROVED
30 METHANE OXIDATION IN NATURAL GAS AUTOMOTIVE EMISSION CATALYSTS, which is incorporated herein by reference.

Although Figure 3 shows the catalyst 306 as being small particles, this is for illustrative purposes only, and there are other ways that the catalyst 306 may be distributed on the washcoat support 304. For example, the catalyst 306 may form a substantially thin film on the washcoat support 304, may be distributed throughout the washcoat support 304 instead of just on the surface, and/or may be distributed in a different way.

The apparatus 100 may further comprise circuitry 402, shown in Figure 4, operably connected to the first structure 108 to control the oxidation of the methane gas. In some embodiments, the circuitry 402 may be configured to receive a signal from the first and second detectors 114, 116, and may further be configured to determine a difference between the signal from the first detector 114 and the signal from the second detector 116. The apparatus 100 may further comprise a storage medium 404. The storage medium 404 may be operably connected to the circuitry 402, wherein the storage medium 404 may be configured to store the signals from the first and second detectors 114, 116, and/or it may be configured to store the determined difference between the signal from the first detector 114 and the signal from the second detector 116. The storage medium may include one or more mechanisms by which a user may retrieve information from it, including but not limited to an RFID, a removable disk, and/or another mechanism. In some embodiments the circuitry 402 may be further configured to determine an amount of methane oxidized based on the received signals from the first and second methane detectors 114, 116. The apparatus 100 may further comprise a transmitter 406, wherein the transmitter 406 may be operably connected to the circuitry 402, the transmitter 406 being configured to send the signals from the first and second detectors 114, 116, and/or it may be configured to send a first signal corresponding to the determined amount of methane oxidized.

In some embodiments the device 102 may be associated with an identification, wherein the identification may correspond to the ruminant 202, the device 102, the location of the ruminant 202, and/or an entity associated with the ruminant 202 (such as a farm that owns the cow, a field or building number within the farm, or another entity that may be associated with and/or identify the ruminant). The identification

may be a name, a number, or a different identifier. The identification may be included with information sent, received, stored, or otherwise used in relation to the device 102. For example, with reference to Figure 4, the circuitry may be configured to receive and/or send the identification along with other signals related to the ruminant 202. Similarly, the storage medium 404 may be configured to store the identification along with other information related to the ruminant, in particular, information related to the oxidation of methane.

The apparatus may further comprise a tracker 412 configured to determine the location of the ruminant. The tracker 412 may include, for example, a GPS receiver and/or a different device for determining the location of the ruminant. The tracker 412 may be configured to produce the identification as described previously, and/or may be operably connected to one or more of the elements corresponding to the device 102, such as the circuitry 402, the storage medium 404, the transmitter 406, and/or another element, wherein the elements may be configured to send and/or receive information produced by the tracker 412.

In some embodiments the circuitry 402 may be configured to determine an amount of methane oxidized by the device 102. For example, in one embodiment the first detector 114 may be configured to determine an amount of methane in the un-oxidized ruminant exhalation (examples of measurements of the un-oxidized ruminant exhalation have been described with respect to Figure 1), and the second detector 116 may be configured to determine an amount of methane in the ruminant exhalation after the oxidation. The first and second detectors 114, 116 may send signals to the circuitry 402, and the circuitry 402 may determine the amount of methane oxidized by determining a difference between the detected amounts of methane.

In some embodiments, only one measurement may be used to determine the amount of methane oxidized. For example, the amount of methane in the un-oxidized ruminant exhalation may be pre-determined, and the circuitry 402 may only receive a signal indicating the amount of methane in the oxidized ruminant exhalation.

In some embodiments, the circuitry 402 may be further configured to determine an amount of a methane oxidation product produced by the methane

oxidations such as carbon monoxide, carbon dioxide, water, or a different product. This may be deduced according to the amount of methane oxidized or it may be measured directly, wherein the measurement may be similar to those previously described for methane oxidation. Further, in some embodiments the amount of methane oxidized may be determined according to measurements of a methane oxidation product. For example, where the first and second detectors 114, 116 are configured to detect carbon dioxide, the circuitry 402 may be configured to infer an amount of methane oxidized based on the amount of carbon dioxide produced.

In some embodiments the circuitry 402 may be further configured to determine a time interval associated with the amount of methane oxidized. For example, the first and second detectors 114, 116 may be configured to send one or more signals corresponding to the time and/or time duration at/during which a measurement was obtained, wherein the circuitry may determine a corresponding time and/or time interval associated with a measurement corresponding to methane oxidation. Or, the circuitry may be configured with a clock and may be further configured to determine the time at which a signal is received (for example, from the first and/or second detectors 114, 116) and/or to determine a time duration during which a measurement was performed. There are many ways in which the circuitry 402, detectors 114, 116, and/or other elements may be configured in order to determine and/or associate a time and/or time duration of a measurement, and one skilled in the art may adapt the configuration to a particular embodiment.

The apparatus may further comprise a heating element 410 arranged to heat the first structure, where the heating element may be an electrical resistance heater or other type of heater, and may further comprise circuitry 402 arranged to control the heating element 410 and/or a power supply 408 arranged to provide power to the heating element 410. In some embodiments the power supply 408 may include a battery, wherein the battery may be rechargeable. In some embodiments the power supply 408 may be further configured to receive energy from the ruminant exhalation. In some embodiments the power supply 408 may be configured to be mounted at a location different from the device 102, such as on the ruminant or in a different location.

The apparatus may further comprise a heat sensor 414 arranged to measure a temperature proximate to the first structure and/or a fan 420 arranged to transfer heat away from the device 102. Although a fan 420 is shown in Figure 4 as the device configured to transfer heat away from the device 102, in other embodiments this may be accomplished by one or more heat pipes or other devices. In some embodiments, the heating element 410, the heat sensor 414, the fan 420, and the circuitry 402 may be incorporated together such that the first structure 108 is configured to heat to a certain temperature, wherein the heating element 410 may automatically turn off when the first structure 108 reaches the desired temperature. Further, the fan 420 may be configured to turn on automatically if the first structure 108 exceeds a certain temperature. In some embodiments, the fan 420 may be configured to be on during a substantial percentage of time when the device 102 is in use. The fan 420 may be used to expel the ruminant exhalation 104 from the device with a greater force than would occur without the fan, and/or may otherwise be used to regulate the flow of the ruminant exhalation 104 through the device.

In some embodiments, heat regulation of the first structure 108 (via the heating element 410, the fan 420; monitored via the heat sensor 414; and/or including one or more other elements conducive to heat regulation of the device) may be responsive to the methane oxidation by the device. For example, the oxidation of the methane may be monitored by detectors 114, 116, and the circuitry 402 may be configured to determine absolute or relative rates of methane oxidation. The rates of methane oxidation may then be altered by altering the temperature of the first structure 108, wherein the process may be automated via the circuitry 402, and/or may receive user input to aid in determining changes in temperature. These changes may, in some embodiments, be performed iteratively, i.e.: change temperature; determine new rate of methane oxidation; change temperature again based on new rate of methane oxidation, and etc. until the desired rate of methane oxidation is achieved.

In some embodiments, heat regulation of the first structure 108 may be responsive to the detection of methane or another substance in the ruminant exhalation 104. For example, the detector 114 may be positioned upstream

(specifically, upstream during exhalation) of the first structure 108 and may be configured to detect a threshold level of methane in the ruminant exhalation 104, wherein the circuitry 402 may be responsive to the positive detection of the threshold level of methane to heat the first structure 108 (via the elements as described above) such that it may oxidize the methane in the ruminant exhalation.

Methane oxidation rates may further be controlled by a shutter or flow control device 418, which may be configured to adjust the flow of the ruminant exhalation through the first structure 108 and/or to adjust the exposure of the first structure 108 to the ruminant exhalation 104. The shutter or flow control device 418 may be operably connected to the circuitry 402 as described previously for the elements conducive to heat regulation, wherein the circuitry may change the flow of the ruminant exhalation 104 through the first structure 108 according to the rate of methane oxidation.

In some embodiments, the heat sensor 414 may be configured to determine a temperature proximate to the device 102, and the apparatus 100 may further comprise a meter 416 configured to determine a volume of ruminant exhalation expelled through the nasal passage of the ruminant, and the circuitry 402 may be configured to determine an amount of methane oxidized based on the determined temperature and volume of ruminant exhalation expelled.

Although the circuitry 402 is shown in Figure 4 as a single unit, in different embodiments the circuitry 402 may include several different units, where the different units may have the same, different, or similar functions. For example, in one embodiment one unit of circuitry may be incorporated with and operably connected to the detectors 114, 116, while a separate unit of circuitry may be incorporated with and operably connected to the heating element 410. Other embodiments may include more than two units of circuitry. There are many ways of incorporating the circuitry in a system and one skilled in the art may arrange the circuitry 402 according to a particular application.

One or more of the elements as shown and described with respect to Figures 1-4 may be configured to send one or more signals, to other elements of the apparatus 100 and/or to one or more locations different from the apparatus. For example, as

described previously, the circuitry 402 may be configured to send and/or receive one or more signals from the storage medium 404. Further, the circuitry 402 and/or the storage medium 404 may be configured to send one or more signals to one or more locations separate from the apparatus, such as a central processor configured to receive signals from many ruminants outfitted with the apparatus 100 in a certain geographical area. The signals may be sent electronically, wirelessly, optically such as via an optical fiber, and/or in another way. There are many ways of configuring the apparatus 100 such that the elements of the apparatus 100 may transmit signals to each other and/or to one or more locations external to the apparatus, and one skilled in the art may adapt the mode of transmission of signals according to their particular application.

Although some of the elements of Figure 4 are shown as being integral to the device 102 (such as the tracker 412, meter 416, etc.) and some elements are shown as being substantially outside the device (such as the circuitry 402, storage medium 404, etc.), whether an element is incorporated within the device 102 or external to and/or separate from the device 102 may depend on the application and factors such as the size of the element, benefits from proximity of different elements, etc.

Although Figure 4 includes many elements, some embodiments may not include all of the elements as shown. For example, in a very simple embodiment, the device 102 may include the first structure 108 and the heating element 410, where the heating element may be configured to heat the first structure 108. In this embodiment, the heating element 410 may be configured to heat to a certain temperature and/or may include circuitry 402 configured to control the heating element 410.

In one embodiment, depicted in the flow chart of Figure 5 (wherein the method may be performed with the apparatus 100 as described with respect to Figures 1-4), a method comprises (502) receiving a ruminant exhalation in a first region of the nasal passage of a ruminant (wherein the first region may include at least a portion of a region of the first structure 108), and (504) oxidizing methane gas in the ruminant

exhalation at least partially within the first region of the nasal passage of the ruminant.

In some embodiments, the method may further comprise detecting the presence of a first methane oxidation product in an un-oxidized portion of the ruminant exhalation, and may further comprise sending a signal corresponding to the detected presence of the first methane oxidation product in an un-oxidized portion of the ruminant exhalation. In some embodiments, detecting the presence of a first methane oxidation product in an un-oxidized portion of the ruminant exhalation may include detecting the presence of the first methane oxidation product in the ruminant exhalation prior to oxidizing the methane in the ruminant exhalation.

The method may further comprise detecting the presence of the first methane oxidation product in the ruminant exhalation after oxidizing the methane in the ruminant exhalation, and sending a signal, the signal corresponding to the detected presence of the first methane oxidation product in the ruminant exhalation after oxidizing the methane in the ruminant exhalation.

The method may further comprise determining a difference between the detected amount of the first methane oxidation product in the un-oxidized portion of the ruminant exhalation and the detected amount of the first methane oxidation product in the ruminant exhalation after oxidizing the methane in the ruminant exhalation. The method may further comprise determining an amount of methane oxidized based on the determined difference between the detected amount of the first methane oxidation product in the un-oxidized portion of the ruminant exhalation to the detected amount of the first methane oxidation product in the ruminant exhalation after oxidizing the methane in the ruminant exhalation. The method may further comprise determining an amount of a second methane oxidation product produced based on the determined difference between the detected amount of the first methane oxidation product in the ruminant exhalation prior to oxidizing the methane in the ruminant exhalation to the detected amount of the first methane oxidation product in the ruminant exhalation after oxidizing the methane in the ruminant exhalation, wherein the first methane oxidation product may be different from the second methane oxidation product.

In one embodiment, depicted in the flow chart of Figure 6, a method comprises (602) receiving a first input signal corresponding to a first measurement of a ruminant exhalation, the first measurement corresponding to an un-oxidized portion of the ruminant exhalation, (604) receiving a second input signal corresponding to a second measurement of a ruminant exhalation, the second measurement corresponding to an oxidized portion of the ruminant exhalation, and (606) producing a first output signal based on a difference between the first input signal and the second input signal. The method may be performed, for example, with the circuitry 402 as shown and described with respect to Figure 4. The first and/or second measurements of a ruminant exhalation may correspond to first and/or second detected levels of the ruminant exhalation. For example, the "measurement" may not determine an absolute quantity but may simply correspond to a detected level, which may be compared with other detected levels obtained in a similar way.

In some embodiments producing a first output signal based on a difference between the first input signal and the second input signal may include determining an amount of methane oxidized during the oxidation of the exhalation, wherein the output signal may include information related to the determined amount of methane oxidized during the oxidation of the exhalation. In some embodiments producing a first output signal based on a difference between the first input signal and the second input signal may include determining an amount of a methane oxidation product produced during the oxidation of the exhalation, wherein producing a first output signal based on a difference between the first input signal and the second input signal may further include determining a net environmental offset corresponding to the amount of methane oxidized and the amount of the methane oxidation product produced. The method may further comprise associating a monetary value to the determined net environmental offset.

In one embodiment, depicted in the flow chart of Figure 7, a method comprises (702) receiving a first input signal corresponding to a difference between a first measurement of a ruminant exhalation obtained prior to oxidation of the exhalation and a second measurement of a ruminant exhalation obtained after

oxidation of the exhalation, and (704) producing a first output signal based on the received first input signal and corresponding to an amount of methane oxidized in the oxidation of the exhalation. In some embodiments, the first input signal may correspond to an on state, and the method may further comprise receiving a second
5 input signal corresponding to a difference between a third measurement of a ruminant exhalation obtained prior to oxidation of the exhalation and a fourth measurement of a ruminant exhalation obtained after oxidation of the exhalation, the second input signal corresponding to an off state. Producing a first output signal may further include producing the first output signal based on the received first signal and the
10 received second signal.

In some embodiments, the first input signal may correspond to a first ruminant, and the method may further comprise receiving a second input signal corresponding to a difference between a third measurement of a ruminant exhalation obtained prior to oxidation of the exhalation and a fourth measurement of a ruminant
15 exhalation obtained after oxidation of the exhalation, the second input signal corresponding to a second ruminant different from the first ruminant. The method may further comprise producing a second output signal based on the received second input signal.

In some embodiments the method may further comprise receiving a second
20 input signal corresponding to a difference between a third measurement of a ruminant exhalation obtained prior to oxidation of the exhalation and a fourth measurement of a ruminant exhalation obtained after oxidation of the exhalation, wherein the first input signal corresponds to a first time and the second input signal corresponds to a second time different from the first time, and producing the first output signal based
25 on the received first and second input signals and corresponding to an amount of methane oxidized, and further corresponding to a time difference between the first time and the second time.

In one embodiment, depicted in the flow chart of Figure 8, a method comprises (802) receiving a first input signal corresponding to a first measurement of
30 a ruminant exhalation obtained after oxidation, within a nasal passage of the ruminant, of the exhalation, and (804) producing a first output signal based on the

received first input signal and corresponding to an amount of methane oxidized in the oxidation of the exhalation.

In one embodiment, depicted in the flow chart of Figure 9, a method comprises (902) detecting a post-oxidation level of methane exiting a ruminant, and
5 (904) responsive to the detecting, producing an indicator of the post-oxidation level. In some embodiments, the indicator may include a visible indicia of an accepted level, an electromagnetic signal, and/or a different indicator.

Each of the method as described herein may be performed with one or more other methods described herein and /or one or more methods for using the apparatus
10 as described with respect to Figures 1-4. Further, many of the methods as described herein, including methods for using the apparatus as described with respect to Figures 1-4, may be followed by sending a signal corresponding to one or more results obtained in executing the method.

Those having skill in the art will recognize that the state of the art has
15 progressed to the point where there is little distinction left between hardware, software, and/or firmware implementations of aspects of systems; the use of hardware, software, and/or firmware is generally (but not always, in that in certain contexts the choice between hardware and software can become significant) a design choice representing cost vs. efficiency tradeoffs. Those having skill in the art will
20 appreciate that there are various vehicles by which processes and/or systems and/or other technologies described herein can be effected (e.g., hardware, software, and/or firmware), and that the preferred vehicle will vary with the context in which the processes and/or systems and/or other technologies are deployed. For example, if an implementer determines that speed and accuracy are paramount, the implementer may
25 opt for a mainly hardware and/or firmware vehicle; alternatively, if flexibility is paramount, the implementer may opt for a mainly software implementation; or, yet again alternatively, the implementer may opt for some combination of hardware, software, and/or firmware. Hence, there are several possible vehicles by which the processes and/or devices and/or other technologies described herein may be effected,
30 none of which is inherently superior to the other in that any vehicle to be utilized is a choice dependent upon the context in which the vehicle will be deployed and the

specific concerns (e.g., speed, flexibility, or predictability) of the implementer, any of which may vary. Those skilled in the art will recognize that optical aspects of implementations will typically employ optically-oriented hardware, software, and or firmware.

5 In some implementations described herein, logic and similar implementations may include software or other control structures. Electronic circuitry, for example, may have one or more paths of electrical current constructed and arranged to implement various functions as described herein. In some implementations, one or more media may be configured to bear a device-detectable implementation when such
10 media hold or transmit a device detectable instructions operable to perform as described herein. In some variants, for example, implementations may include an update or modification of existing software or firmware, or of gate arrays or programmable hardware, such as by performing a reception of or a transmission of one or more instructions in relation to one or more operations described herein.
15 Alternatively or additionally, in some variants, an implementation may include special-purpose hardware, software, firmware components, and/or general-purpose components executing or otherwise invoking special-purpose components. Specifications or other implementations may be transmitted by one or more instances of tangible transmission media as described herein, optionally by packet transmission
20 or otherwise by passing through distributed media at various times.

 Alternatively or additionally, implementations may include executing a special-purpose instruction sequence or invoking circuitry for enabling, triggering, coordinating, requesting, or otherwise causing one or more occurrences of virtually any functional operations described herein. In some variants, operational or other
25 logical descriptions herein may be expressed as source code and compiled or otherwise invoked as an executable instruction sequence. In some contexts, for example, implementations may be provided, in whole or in part, by source code, such as C++, or other code sequences. In other implementations, source or other code implementation, using commercially available and/or techniques in the art, may be
30 compiled/implemented/translated/converted into a high-level descriptor language (e.g., initially implementing described technologies in C or C++ programming

language and thereafter converting the programming language implementation into a logic-synthesizable language implementation, a hardware description language implementation, a hardware design simulation implementation, and/or other such similar mode(s) of expression). For example, some or all of a logical expression
5 (e.g., computer programming language implementation) may be manifested as a Verilog-type hardware description (e.g., via Hardware Description Language (HDL) and/or Very High Speed Integrated Circuit Hardware Descriptor Language (VHDL)) or other circuitry model which may then be used to create a physical implementation having hardware (e.g., an Application Specific Integrated Circuit). Those skilled in
10 the art will recognize how to obtain, configure, and optimize suitable transmission or computational elements, material supplies, actuators, or other structures in light of these teachings.

The foregoing detailed description has set forth various embodiments of the devices and/or processes via the use of block diagrams, flowcharts, and/or examples.
15 Insofar as such block diagrams, flowcharts, and/or examples contain one or more functions and/or operations, it will be understood by those within the art that each function and/or operation within such block diagrams, flowcharts, or examples can be implemented, individually and/or collectively, by a wide range of hardware, software, firmware, or virtually any combination thereof. In one embodiment, several portions
20 of the subject matter described herein may be implemented via Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs), digital signal processors (DSPs), or other integrated formats. However, those skilled in the art will recognize that some aspects of the embodiments disclosed herein, in whole or in part, can be equivalently implemented in integrated circuits, as one or more computer
25 programs running on one or more computers (e.g., as one or more programs running on one or more computer systems), as one or more programs running on one or more processors (e.g., as one or more programs running on one or more microprocessors), as firmware, or as virtually any combination thereof, and that designing the circuitry and/or writing the code for the software and or firmware would be well within the
30 skill of one of skill in the art in light of this disclosure. In addition, those skilled in the art will appreciate that the mechanisms of the subject matter described herein are

capable of being distributed as a program product in a variety of forms, and that an illustrative embodiment of the subject matter described herein applies regardless of the particular type of signal bearing medium used to actually carry out the distribution. Examples of a signal bearing medium include, but are not limited to, the following: a recordable type medium such as a floppy disk, a hard disk drive, a Compact Disc (CD), a Digital Video Disk (DVD), a digital tape, a computer memory, etc.; and a transmission type medium such as a digital and/or an analog communication medium (e.g., a fiber optic cable, a waveguide, a wired communications link, a wireless communication link (e.g., transmitter, receiver, transmission logic, reception logic, etc.), etc.).

In a general sense, those skilled in the art will recognize that the various embodiments described herein can be implemented, individually and/or collectively, by various types of electro-mechanical systems having a wide range of electrical components such as hardware, software, firmware, and/or virtually any combination thereof; and a wide range of components that may impart mechanical force or motion such as rigid bodies, spring or torsional bodies, hydraulics, electro-magnetically actuated devices, and/or virtually any combination thereof. Consequently, as used herein "electro-mechanical system" includes, but is not limited to, electrical circuitry operably coupled with a transducer (e.g., an actuator, a motor, a piezoelectric crystal, a Micro Electro Mechanical System (MEMS), etc.), electrical circuitry having at least one discrete electrical circuit, electrical circuitry having at least one integrated circuit, electrical circuitry having at least one application specific integrated circuit, electrical circuitry forming a general purpose computing device configured by a computer program (e.g., a general purpose computer configured by a computer program which at least partially carries out processes and/or devices described herein, or a microprocessor configured by a computer program which at least partially carries out processes and/or devices described herein), electrical circuitry forming a memory device (e.g., forms of memory (e.g., random access, flash, read only, etc.)), electrical circuitry forming a communications device (e.g., a modem, communications switch, optical-electrical equipment, etc.), and/or any non-electrical analog thereto, such as optical or other analogs. Those skilled in the art will also appreciate that examples of

electro-mechanical systems include but are not limited to a variety of consumer electronics systems, medical devices, as well as other systems such as motorized transport systems, factory automation systems, security systems, and/or communication/computing systems. Those skilled in the art will recognize that electro-mechanical as used herein is not necessarily limited to a system that has both electrical and mechanical actuation except as context may dictate otherwise.

In a general sense, those skilled in the art will recognize that the various aspects described herein which can be implemented, individually and/or collectively, by a wide range of hardware, software, firmware, and/or any combination thereof can be viewed as being composed of various types of "electrical circuitry." Consequently, as used herein "electrical circuitry" includes, but is not limited to, electrical circuitry having at least one discrete electrical circuit, electrical circuitry having at least one integrated circuit, electrical circuitry having at least one application specific integrated circuit, electrical circuitry forming a general purpose computing device configured by a computer program (e.g., a general purpose computer configured by a computer program which at least partially carries out processes and/or devices described herein, or a microprocessor configured by a computer program which at least partially carries out processes and/or devices described herein), electrical circuitry forming a memory device (e.g., forms of memory (e.g., random access, flash, read only, etc.)), and/or electrical circuitry forming a communications device (e.g., a modem, communications switch, optical-electrical equipment, etc.). Those having skill in the art will recognize that the subject matter described herein may be implemented in an analog or digital fashion or some combination thereof.

Those skilled in the art will recognize that at least a portion of the devices and/or processes described herein can be integrated into an image processing system. Those having skill in the art will recognize that a typical image processing system generally includes one or more of a system unit housing, a video display device, memory such as volatile or non-volatile memory, processors such as microprocessors or digital signal processors, computational entities such as operating systems, drivers, applications programs, one or more interaction devices (e.g., a touch pad, a touch

screen, an antenna, etc.), control systems including feedback loops and control motors (e.g., feedback for sensing lens position and/or velocity; control motors for moving/distorting lenses to give desired focuses). An image processing system may be implemented utilizing suitable commercially available components, such as those
5 typically found in digital still systems and/or digital motion systems.

Those skilled in the art will recognize that at least a portion of the devices and/or processes described herein can be integrated into a data processing system. Those having skill in the art will recognize that a data processing system generally includes one or more of a system unit housing, a video display device, memory such
10 as volatile or non-volatile memory, processors such as microprocessors or digital signal processors, computational entities such as operating systems, drivers, graphical user interfaces, and applications programs, one or more interaction devices (e.g., a touch pad, a touch screen, an antenna, etc.), and/or control systems including feedback loops and control motors (e.g., feedback for sensing position and/or
15 velocity; control motors for moving and/or adjusting components and/or quantities). A data processing system may be implemented utilizing suitable commercially available components, such as those typically found in data computing/communication and/or network computing/communication systems.

Those skilled in the art will recognize that it is common within the art to
20 implement devices and/or processes and/or systems, and thereafter use engineering and/or other practices to integrate such implemented devices and/or processes and/or systems into more comprehensive devices and/or processes and/or systems. That is, at least a portion of the devices and/or processes and/or systems described herein can be integrated into other devices and/or processes and/or systems via a reasonable
25 amount of experimentation. Those having skill in the art will recognize that examples of such other devices and/or processes and/or systems might include – as appropriate to context and application -- all or part of devices and/or processes and/or systems of (a) an air conveyance (e.g., an airplane, rocket, helicopter, etc.) , (b) a ground conveyance (e.g., a car, truck, locomotive, tank, armored personnel carrier, etc.), (c) a
30 building (e.g., a home, warehouse, office, etc.), (d) an appliance (e.g., a refrigerator, a washing machine, a dryer, etc.), (e) a communications system (e.g., a networked

system, a telephone system, a Voice over IP system, etc.), (f) a business entity (e.g., an Internet Service Provider (ISP) entity such as Comcast Cable, Qwest, Southwestern Bell, etc.), or (g) a wired/wireless services entity (e.g., Sprint, Cingular, Nextel, etc.), etc.

5 In certain cases, use of a system or method may occur in a territory even if components are located outside the territory. For example, in a distributed computing context, use of a distributed computing system may occur in a territory even though parts of the system may be located outside of the territory (e.g., relay, server, processor, signal-bearing medium, transmitting computer, receiving computer, etc.
10 located outside the territory).

A sale of a system or method may likewise occur in a territory even if components of the system or method are located and/or used outside the territory.

Further, implementation of at least part of a system for performing a method in one territory does not preclude use of the system in another territory.

15 All of the above U.S. patents, U.S. patent application publications, U.S. patent applications, foreign patents, foreign patent applications and non-patent publications referred to in this specification and/or listed in any Application Data Sheet are incorporated herein by reference, to the extent not inconsistent herewith.

20 One skilled in the art will recognize that the herein described components (e.g., operations), devices, objects, and the discussion accompanying them are used as examples for the sake of conceptual clarity and that various configuration modifications are contemplated. Consequently, as used herein, the specific exemplars set forth and the accompanying discussion are intended to be representative of their more general classes. In general, use of any specific exemplar is intended to be
25 representative of its class, and the non-inclusion of specific components (e.g., operations), devices, and objects should not be taken limiting.

Those skilled in the art will appreciate that “user” may be representative of a human user, a robotic user (e.g., computational entity), and/or substantially any combination thereof (e.g., a user may be assisted by one or more robotic agents)
30 unless context dictates otherwise. Those skilled in the art will appreciate that, in

general, the same may be said of “sender” and/or other entity-oriented terms as such terms are used herein unless context dictates otherwise.

With respect to the use of substantially any plural and/or singular terms herein, those having skill in the art can translate from the plural to the singular and/or
5 from the singular to the plural as is appropriate to the context and/or application. The various singular/plural permutations are not expressly set forth herein for sake of clarity.

The herein described subject matter sometimes illustrates different components contained within, or connected with, different other components. It is to
10 be understood that such depicted architectures are merely exemplary, and that in fact many other architectures may be implemented which achieve the same functionality. In a conceptual sense, any arrangement of components to achieve the same functionality is effectively “associated” such that the desired functionality is achieved. Hence, any two components herein combined to achieve a particular
15 functionality can be seen as “associated with” each other such that the desired functionality is achieved, irrespective of architectures or intermedial components. Likewise, any two components so associated can also be viewed as being “operably connected”, or “operably coupled,” to each other to achieve the desired functionality, and any two components capable of being so associated can also be viewed as being
20 “operably couplable,” to each other to achieve the desired functionality. Specific examples of operably couplable include but are not limited to physically mateable and/or physically interacting components, and/or wirelessly interactable, and/or wirelessly interacting components, and/or logically interacting, and/or logically interactable components.

25 In some instances, one or more components may be referred to herein as “configured to,” “configured by,” “configurable to,” “operable/operative to,” “adapted/adaptable,” “able to,” “conformable/conformed to,” etc. Those skilled in the art will recognize that such terms (e.g. “configured to”) can generally encompass active-state components and/or inactive-state components and/or standby-state
30 components, unless context requires otherwise.

While particular aspects of the present subject matter described herein have

been shown and described, it will be apparent to those skilled in the art that, based upon the teachings herein, changes and modifications may be made without departing from the subject matter described herein and its broader aspects and, therefore, the appended claims are to encompass within their scope all such changes and

5 modifications as are within the true spirit and scope of the subject matter described herein. It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims (e.g., bodies of the appended claims) are generally intended as “open” terms (e.g., the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted

10 as “having at least,” the term “includes” should be interpreted as “includes but is not limited to,” etc.). It will be further understood by those within the art that if a specific number of an introduced claim recitation is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the following appended claims may

15 contain usage of the introductory phrases “at least one” and “one or more” to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim recitation to claims containing only one such recitation, even when the same claim includes the

20 introductory phrases “one or more” or “at least one” and indefinite articles such as “a” or “an” (e.g., “a” and/or “an” should typically be interpreted to mean “at least one” or “one or more”); the same holds true for the use of definite articles used to introduce claim recitations. In addition, even if a specific number of an introduced claim recitation *is* explicitly recited, those skilled in the art will recognize that such

25 recitation should typically be interpreted to mean *at least* the recited number (e.g., the bare recitation of “two recitations,” without other modifiers, typically means *at least* two recitations, or *two or more* recitations). Furthermore, in those instances where a convention analogous to “at least one of A, B, and C, etc.” is used, in general such a construction is intended in the sense one having skill in the art would understand the

30 convention (e.g., “a system having at least one of A, B, and C” would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C

together, B and C together, and/or A, B, and C together, etc.). In those instances where a convention analogous to “at least one of A, B, or C, etc.” is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (e.g., “a system having at least one of A, B, or C” would
5 include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). It will be further understood by those within the art that typically a disjunctive word and/or phrase presenting two or more alternative terms, whether in the description, claims, or drawings, should be understood to contemplate the possibilities of
10 including one of the terms, either of the terms, or both terms unless context dictates otherwise. For example, the phrase “A or B” will be typically understood to include the possibilities of “A” or “B” or “A and B.”

With respect to the appended claims, those skilled in the art will appreciate that recited operations therein may generally be performed in any order. Also,
15 although various operational flows are presented in a sequence(s), it should be understood that the various operations may be performed in other orders than those which are illustrated, or may be performed concurrently. Examples of such alternate orderings may include overlapping, interleaved, interrupted, reordered, incremental, preparatory, supplemental, simultaneous, reverse, or other variant orderings, unless
20 context dictates otherwise. Furthermore, terms like “responsive to,” “related to,” or other past-tense adjectives are generally not intended to exclude such variants, unless context dictates otherwise.

While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. The various
25 aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope and spirit being indicated by the following claims.

What is claimed is:

CLAIMS

1. An apparatus comprising:
 - a device suitable for retention in a nasal passage of a ruminant, the device being arranged to pass a ruminant exhalation, the device including a first structure configured to oxidize methane gas in the ruminant exhalation, the device being further arranged to pass products of the oxidized methane gas toward a nasal passage exit.
2. The apparatus of Claim 1 wherein the first structure configured to oxidize methane gas includes a catalyst arranged to oxidize the methane gas.
3. The apparatus of Claim 2 wherein the first structure configured to oxidize methane gas further includes:
 - a first substrate; and
 - a first washcoat support in intimate contact with the first substrate, wherein the catalyst is carried by the washcoat support.
4. The apparatus of Claim 3 wherein the first substrate forms a substantially honeycomb structure.
5. The apparatus of Claim 3 wherein the substrate forms a spiral coil.
6. The apparatus of Claim 2 wherein the catalyst includes a noble metal.
7. The apparatus of Claim 2 further comprising:
 - a shutter arranged relative to the first structure to control an exposure of the catalyst to the ruminant exhalation.
8. The apparatus of Claim 1 further comprising:
 - a first methane detector supported by the device and arranged to detect an amount of methane proximate to a first location on the device.

9. The apparatus of Claim 8 wherein the first location is selected such that the first methane detector is arranged to detect an amount of methane in a portion of the ruminant exhalation that bypasses the first structure.
10. The apparatus of Claim 8 wherein the first structure has an on state and an off state, and wherein the first methane detector is arranged to detect an amount of methane when the first structure is in the off state.
11. The apparatus of Claim 8 further comprising:
a second methane detector supported by the device and arranged to detect an amount of methane proximate to a second location on the device, the second location being different from the first location.
12. The apparatus of Claim 11 further comprising:
circuitry configured to receive a signal from the first and second methane detectors.
13. The apparatus of Claim 12 further comprising:
a storage medium operably connected to the circuitry.
14. The apparatus of Claim 12 further comprising:
a transmitter operably connected to the circuitry and configured to send the signals from the first and second methane detectors.
15. The apparatus of Claim 12 wherein the circuitry is further configured to determine an amount of methane oxidized based on the received signals from the first and second methane detectors.
16. The apparatus of Claim 15 further comprising:
a transmitter operably connected to the circuitry, the transmitter being configured to send a first signal corresponding to the determined amount of methane oxidized.

17. The apparatus of Claim 16 wherein the device is associated with an identification, and wherein the transmitter is further configured to include the identification in the first signal.
18. The apparatus of Claim 16 further comprising:
a tracker configured to determine the location of the ruminant, the tracker being operably connected to the transmitter;
and wherein the transmitter is further configured to include information from the tracker in the first signal.
19. The apparatus of Claim 15 wherein the circuitry is further configured to determine a time interval associated with the amount of methane oxidized.
20. The apparatus of Claim 1 further comprising:
a first detector supported by the device and arranged to detect an amount of a methane oxidation product proximate to a first location on the device.
21. The apparatus of Claim 20 wherein the methane oxidation product includes carbon dioxide.
22. The apparatus of Claim 1 further comprising:
an insulator arranged to thermally insulate at least a portion of the device from the nasal passage of the ruminant.
23. The apparatus of Claim 1 further comprising:
circuitry operably connected to the first structure to control the oxidation of the methane gas.
24. The apparatus of Claim 1 further comprising:
a flow control device arranged proximate to the first structure and configured to adjust the flow of the ruminant exhalation through the first structure.
25. The apparatus of Claim 1 further comprising:
a heating element arranged to heat the first structure.

26. The apparatus of Claim 25 further comprising:
circuitry configured to control the heating element.
27. The apparatus of Claim 25 further comprising:
a power supply configured to provide power to the heating element.
28. The apparatus of Claim 1 further comprising:
a heat sensor arranged to measure a temperature proximate to the first structure.
29. The apparatus of Claim 1 further comprising:
a fan arranged to transfer heat away from the device.
30. The apparatus of Claim 1 further comprising:
a heat pipe arranged to transfer heat away from the device.
31. The apparatus of Claim 1 wherein the device is associated with an identification,
and wherein the apparatus further comprises:
circuitry operably connected to the device and configured to send a signal
including information corresponding to the identification.
32. The apparatus of Claim 1 further comprising:
a tracker configured to determine a location of the ruminant.
33. The apparatus of Claim 32 further comprising:
circuitry operably connected to the tracker and configured to send a signal
corresponding to the location of the ruminant.
34. The apparatus of Claim 1 further comprising:
a heat sensor configured to determine a temperature proximate to the first
structure;
a meter configured to determine an amount of ruminant exhalation proximate to
the first structure; and
circuitry configured to determine an amount of methane oxidized based on the
determined temperature and amount of ruminant exhalation proximate to
the first structure.

35. The apparatus of Claim 1 further comprising:
circuitry configured to determine an amount of methane oxidized by the device
and configured to generate an output signal responsive to the determined
amount.
36. The apparatus of Claim 35 further comprising:
a storage medium operably connected to the circuitry, the storage medium being
configured to store data corresponding to at least one of an amount of
methane detected, an amount of methane oxidation product detected, and a
determined amount of methane oxidized.
37. The apparatus of Claim 35 further comprising:
a transmitter operably connected to the circuitry, the transmitter being configured
to send a signal corresponding to at least one of an amount of methane
detected, an amount of methane oxidation product detected, and a
determined amount of methane oxidized.
38. The apparatus of Claim 37 wherein the transmitter is configured to send the signal
using at least one of physical data storage media, wireless signal transmission, and
a physical signal transmission media.
39. A method comprising:
receiving a ruminant exhalation in a first region of the nasal passage of a
ruminant; and
oxidizing methane gas in the ruminant exhalation at least partially within the first
region of the nasal passage of the ruminant.
40. The method of Claim 39 further comprising:
detecting the presence of methane in an un-oxidized portion of the ruminant
exhalation.

41. The method of claim 40 wherein detecting the presence of methane in an un-oxidized portion of the ruminant exhalation includes:
detecting a threshold level of methane in the ruminant exhalation; and
wherein the oxidizing methane gas in the ruminant exhalation at least partially
within the first region of the nasal passage of the ruminant is responsive to
the detected threshold level of methane in the ruminant exhalation.
42. The method of Claim 39 further comprising:
measuring a temperature in the first region; and
heating the first region according to the measured temperature of the first
region.
43. The method of Claim 39 further comprising:
detecting the presence of a first methane oxidation product after oxidizing at least
a portion of the methane in the ruminant exhalation.
44. The method of Claim 43 further comprising:
detecting the presence of the first methane oxidation product in an un-oxidized
portion of the ruminant exhalation.
45. The method of Claim 39 further comprising:
sending a signal corresponding to an identifier of the ruminant.
46. The method of Claim 39 further comprising:
determining a location of the ruminant; and
sending a signal corresponding to the determined location of the ruminant.
47. The method of Claim 39 further comprising:
determining a time corresponding to the oxidation of the methane gas; and
sending a signal corresponding to the determined time.
48. The method of Claim 39 further comprising:
varying the amount of the methane oxidation.

49. The method of Claim 48 further comprising:
varying the amount of the methane oxidation in response to a measurement of an amount of methane oxidized.
50. A method comprising:
receiving a first input signal corresponding to a first measurement of a ruminant exhalation, the first measurement corresponding to an un-oxidized portion of the ruminant exhalation;
receiving a second input signal corresponding to a second measurement of a ruminant exhalation, the second measurement corresponding to an oxidized portion of the ruminant exhalation; and
producing a first output signal based on a difference between the first input signal and the second input signal.
51. The method of Claim 50 wherein producing a first output signal based on a difference between the first input signal and the second input signal includes:
determining an amount of methane oxidized during the oxidation of the exhalation.
52. The method of Claim 51 wherein producing a first output signal based on a difference between the first input signal and the second input signal includes:
determining an amount of a methane oxidation product produced during the oxidation of the exhalation.
53. The method of Claim 52 wherein producing a first output signal based on a difference between the first input signal and the second input signal further includes:
determining a net environmental offset corresponding to the amount of methane oxidized and the amount of the methane oxidation product produced.
54. The method of Claim 53 further comprising:
associating a monetary value to the determined net environmental offset.

55. The method of Claim 50 further comprising:
receiving a third input signal, the third input signal being indicative of a temperature corresponding to at least one region in which the oxidation of the exhalation occurs;
selecting a change in the temperature corresponding to the at least one region in which the oxidation of the exhalation occurs based on the difference between the first and second input signals; and
producing the first output signal according to the selected change in temperature.
56. The method of Claim 50 wherein the first measurement of a ruminant exhalation corresponds to a first measurement of methane and wherein the second measurement of a ruminant exhalation corresponds to a second measurement of methane.

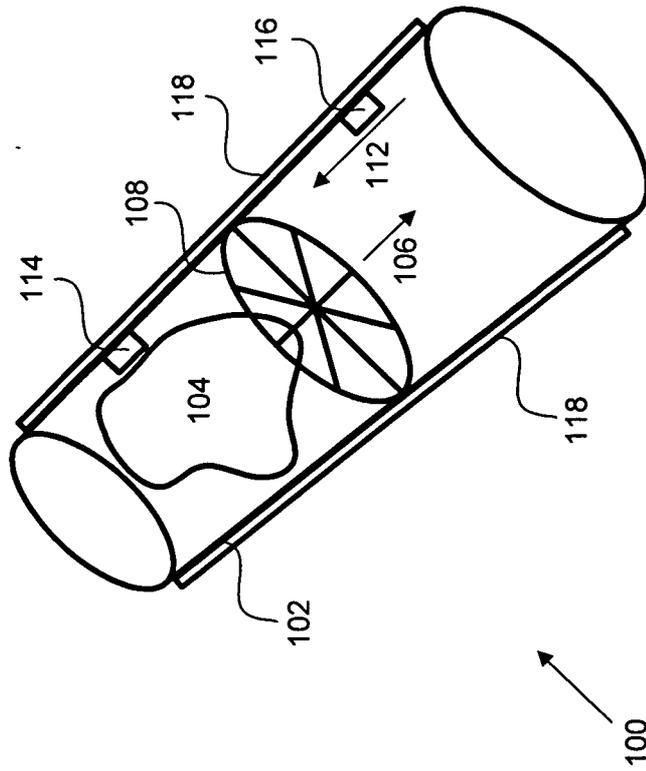


FIG. 1

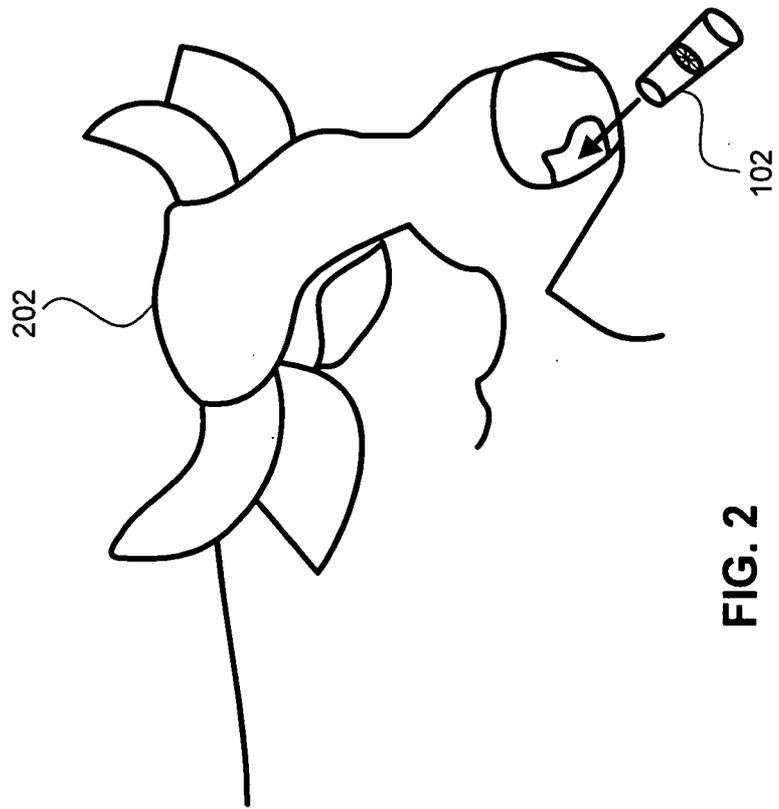


FIG. 2

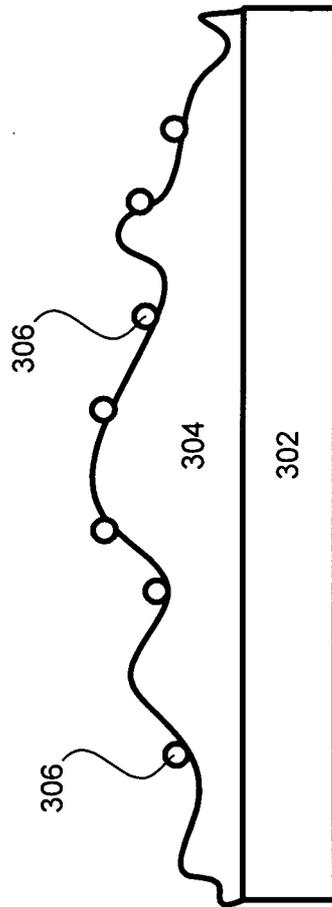


FIG. 3

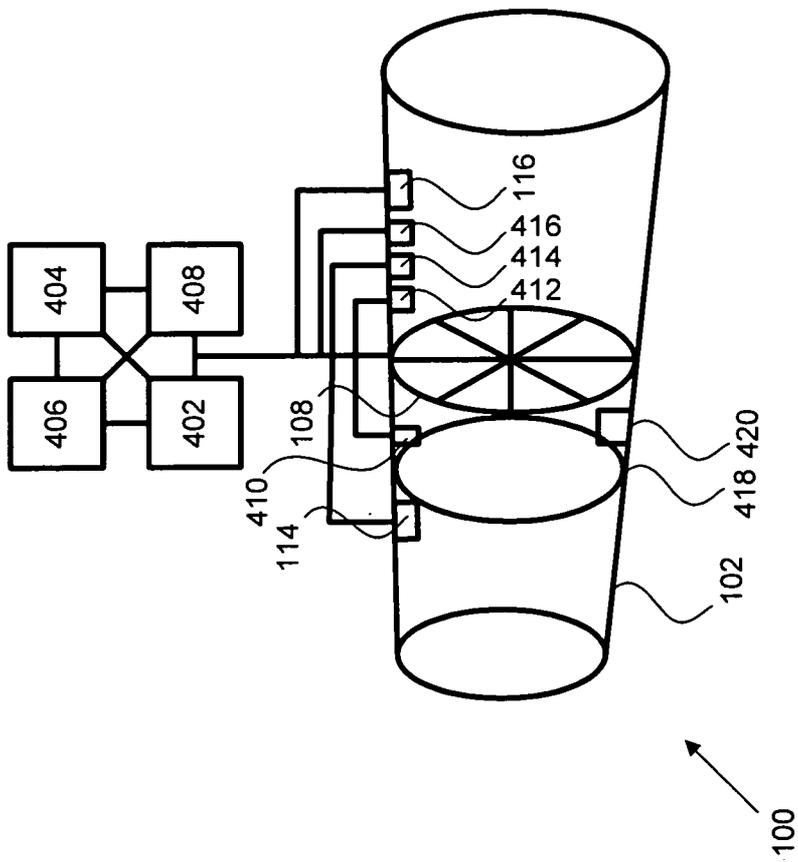


FIG. 4

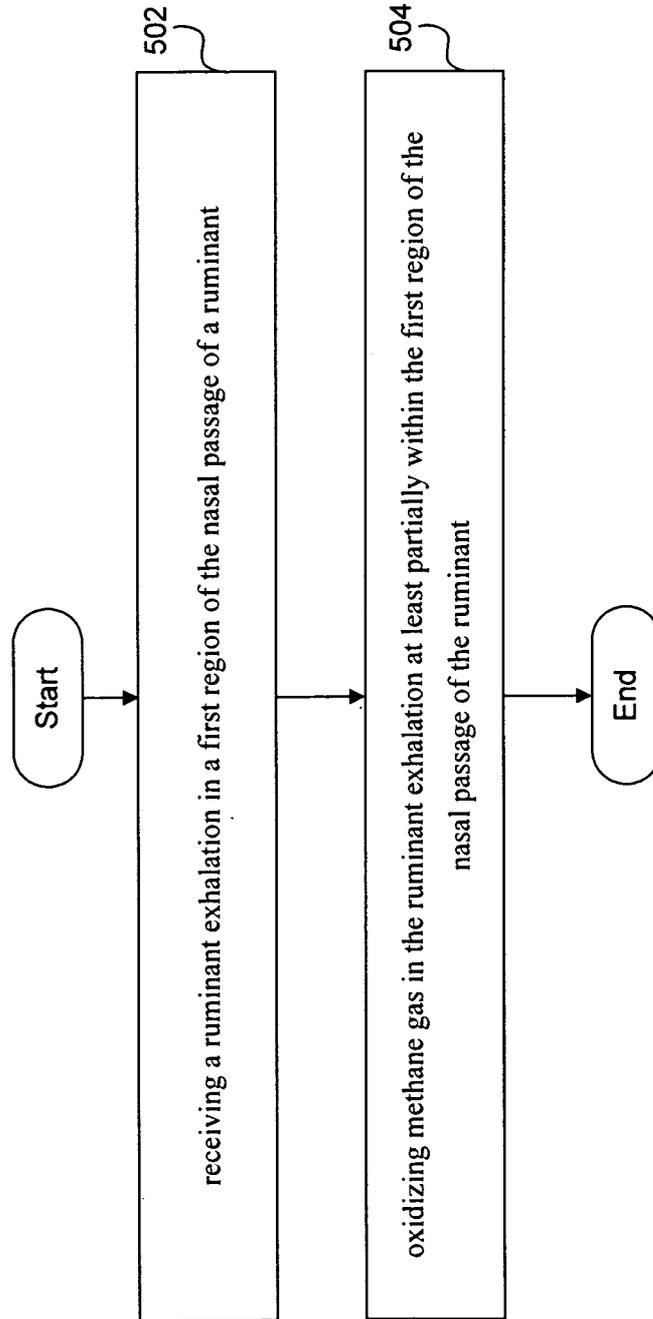


FIG. 5

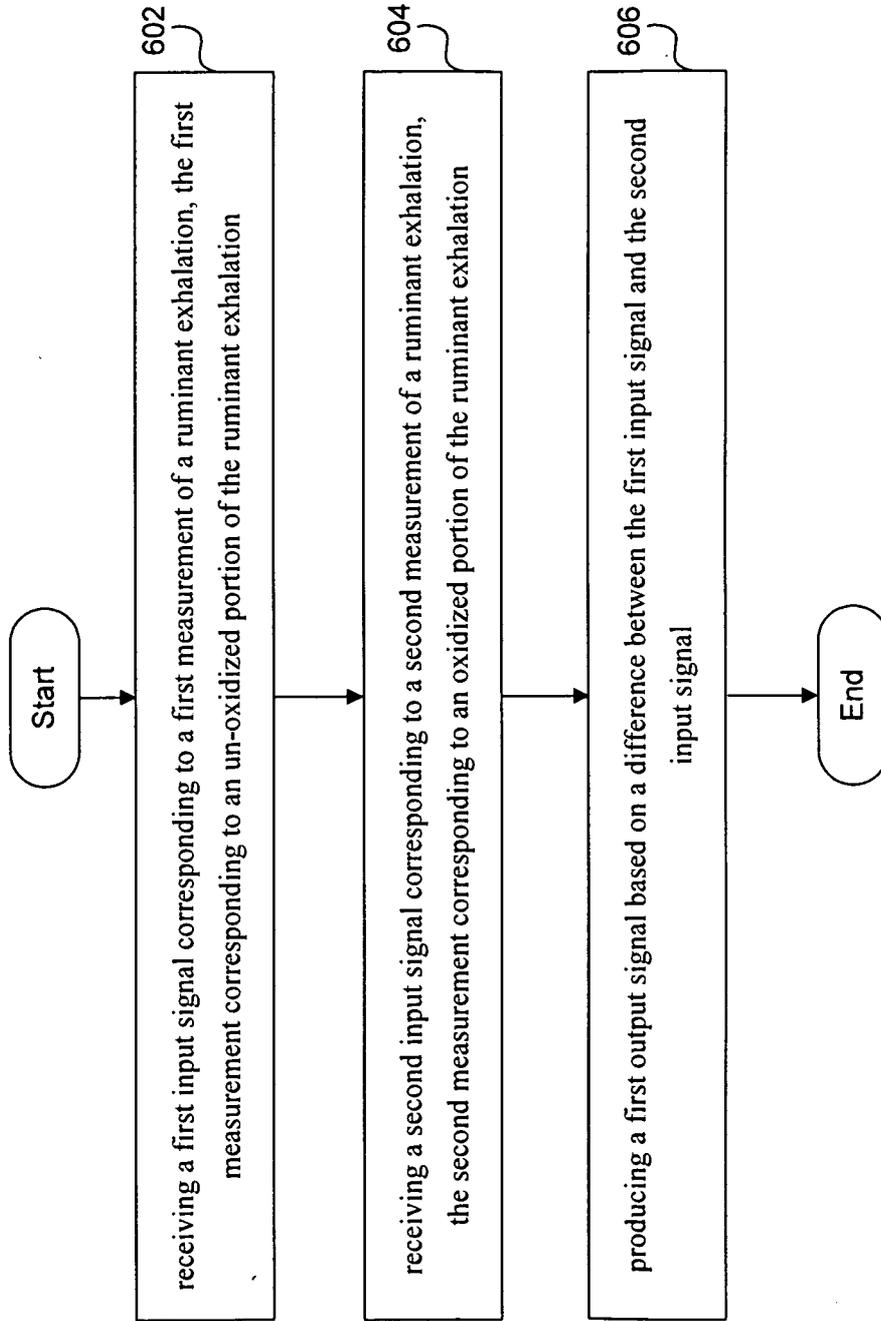


FIG. 6

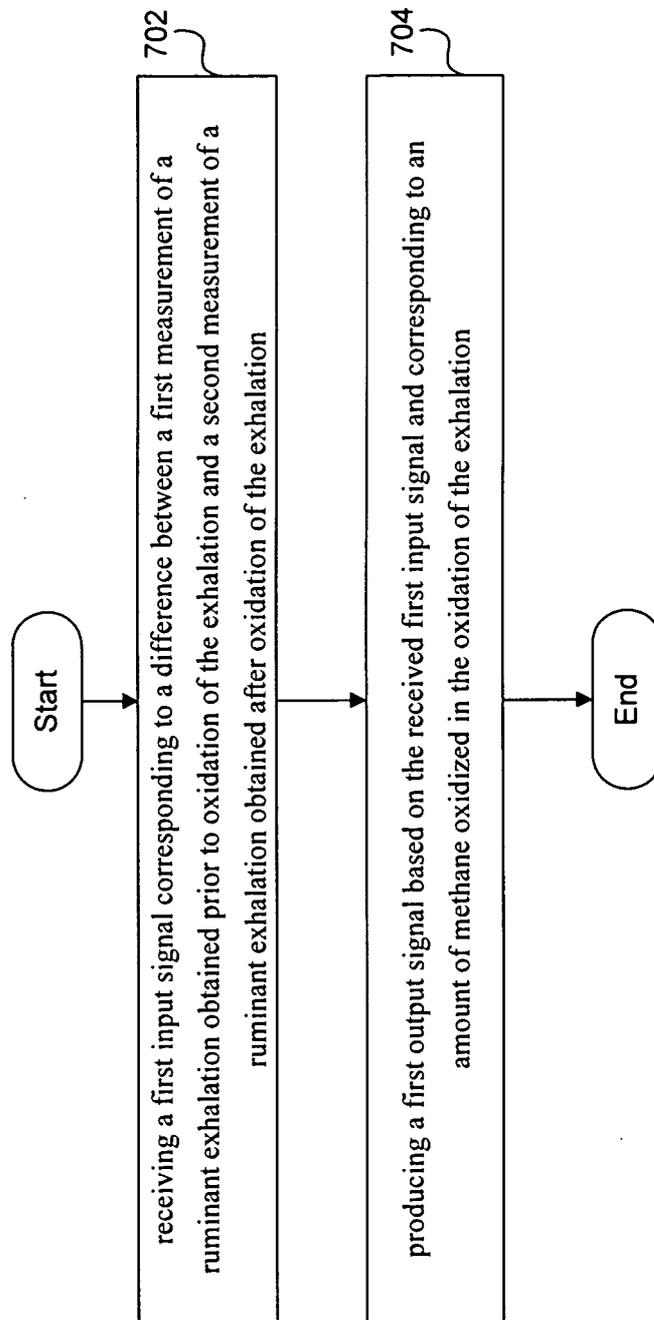


FIG. 7

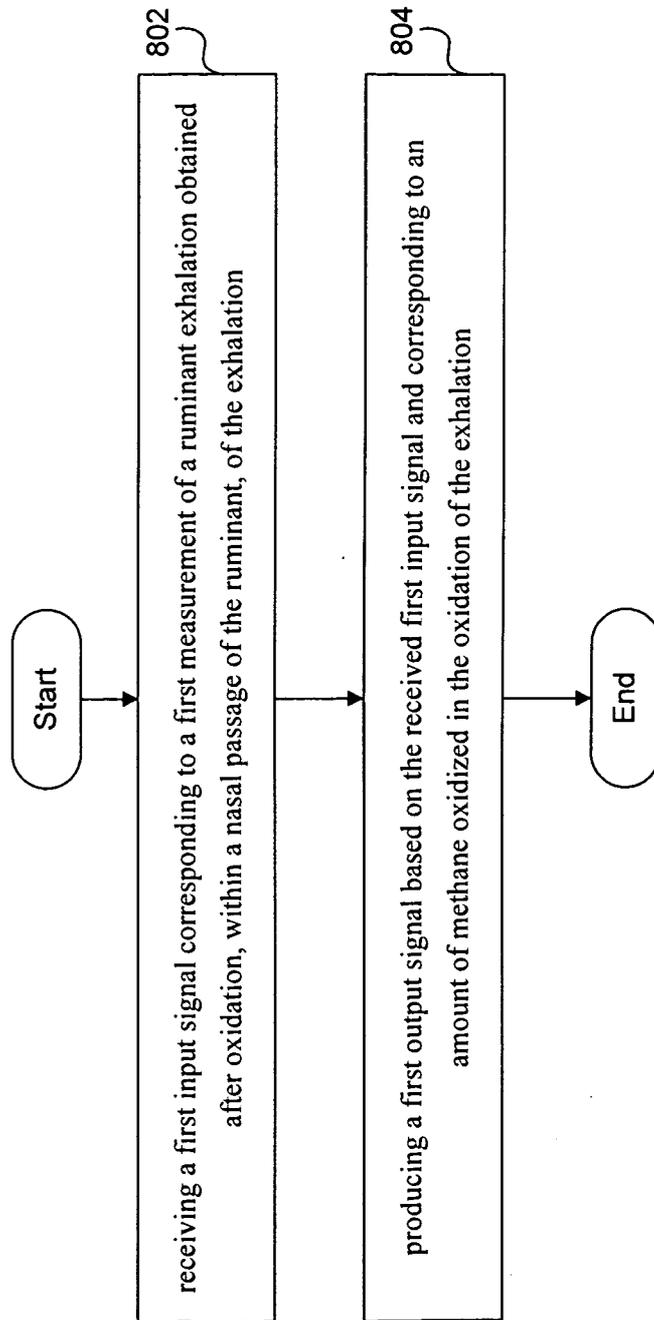


FIG. 8

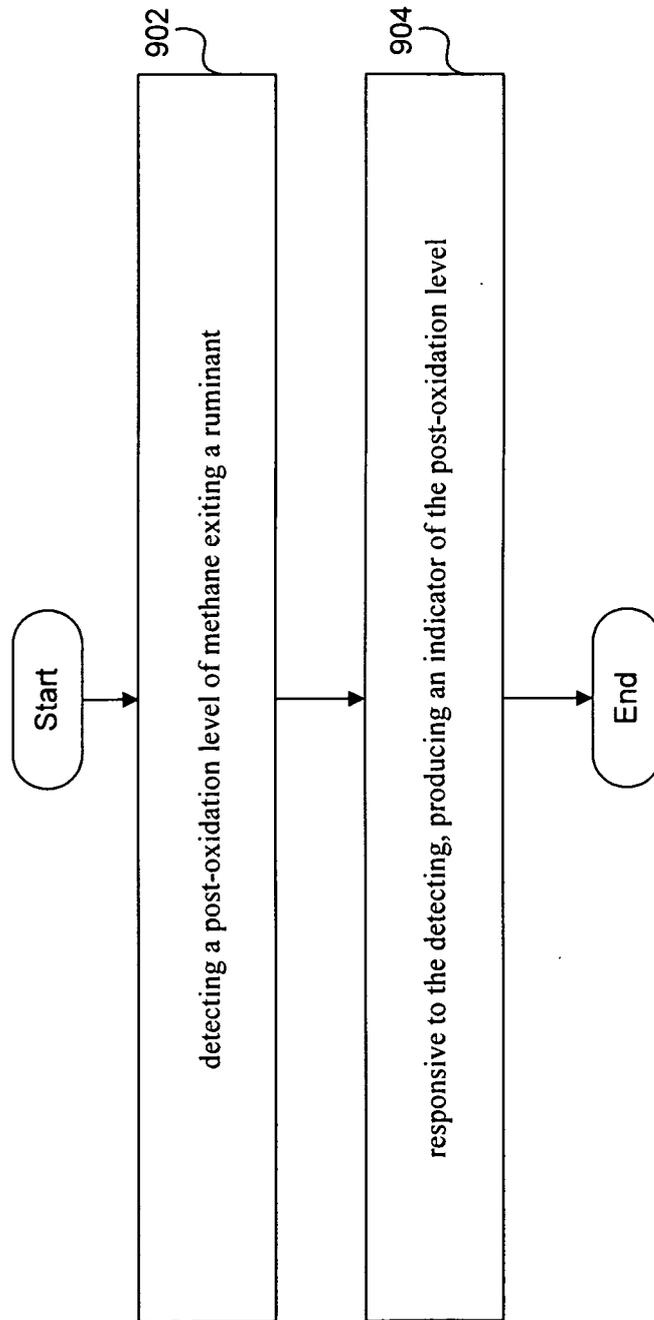


FIG. 9